

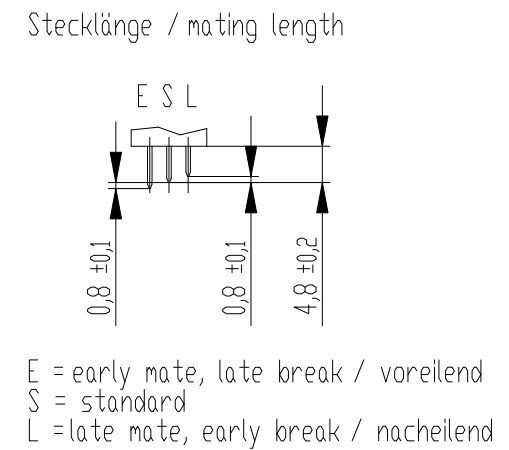


Die deutsche Version dieser Zeichnung dient nur zur Erleichterung der
Anwendung der Zeichnungen von den englischen Originalen. Das
englische Original ist die verbindliche Version.
The German version of this drawing has been offered for convenience only
and may deviate from the English original.
In case of any deviation the English version shall prevail.


Verfertigung sowie Verfertigung dieses Dokuments, Vervielfältigung und Mitteilung seines Inhalts sind
verboten, solange nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz.
Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmackszeichenverletzung vorbehalten.
The reproduction, distribution and utilization of this document as well as the communication
of its contents to others without express authorization is prohibited. Offenders will be held liable for the
payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

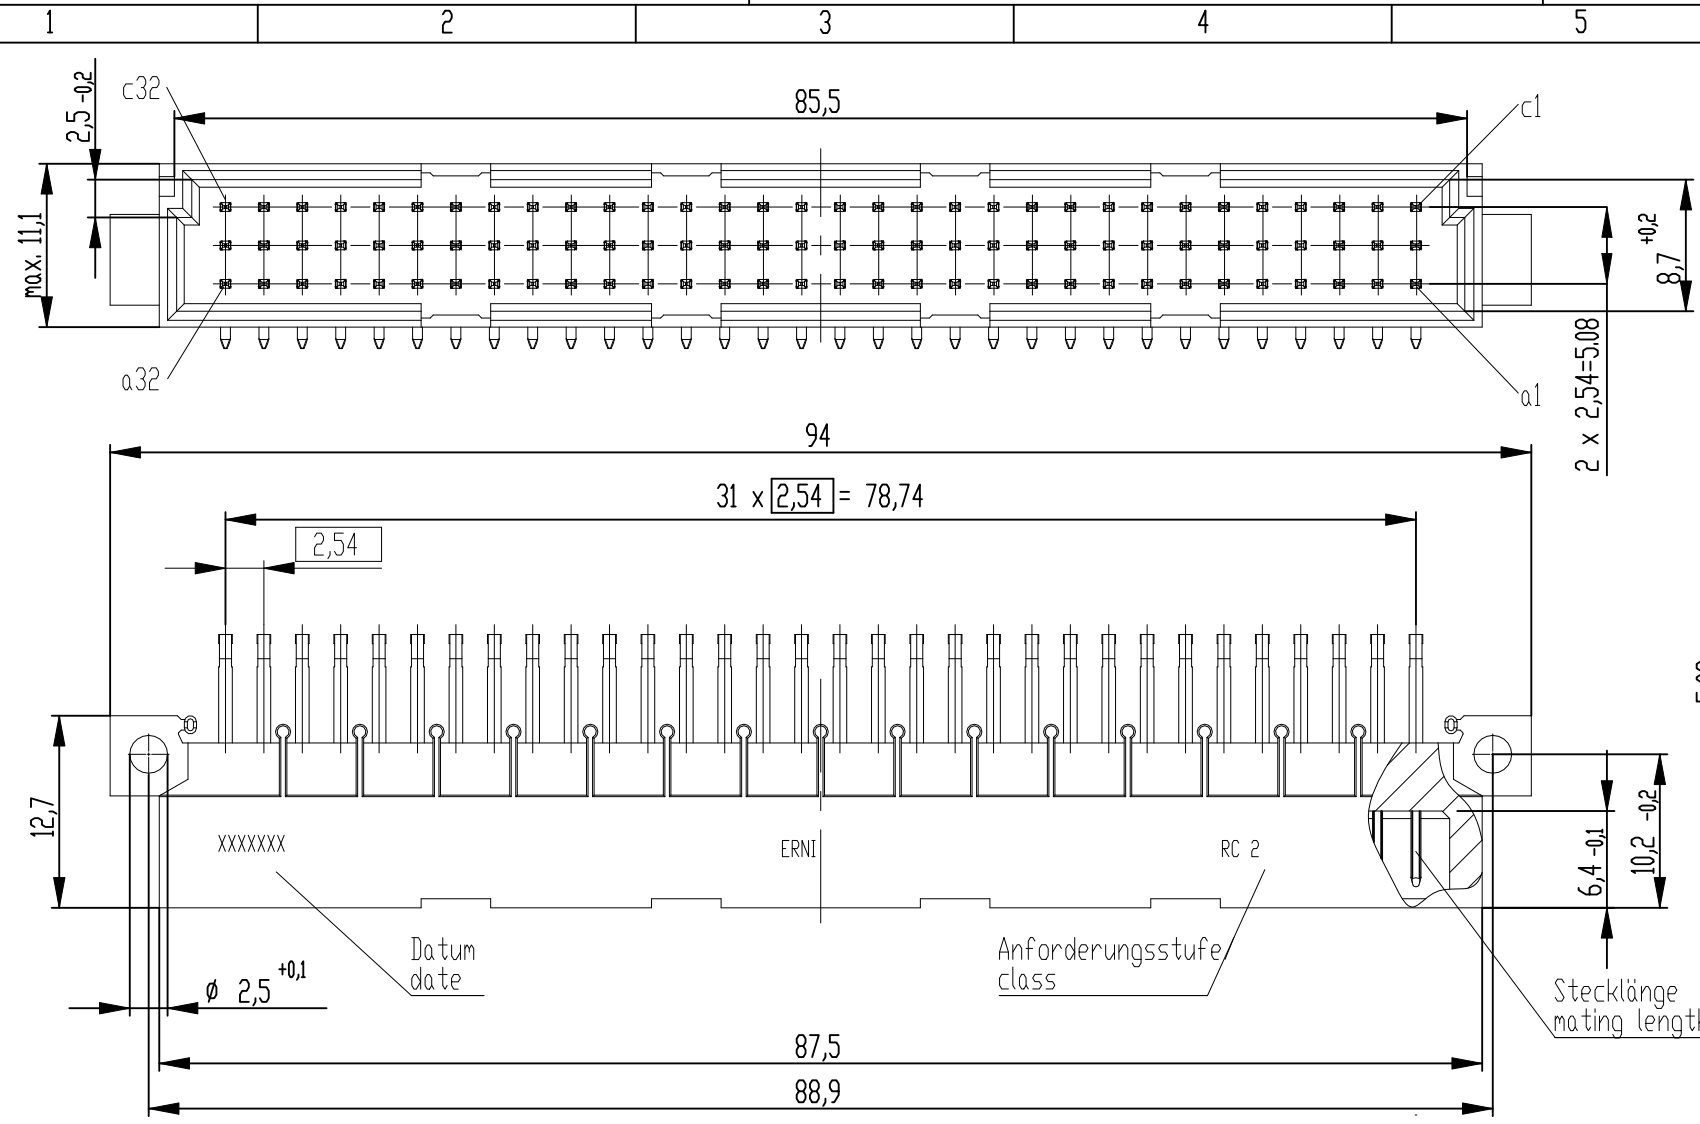

Bestückungsplan / contact layout

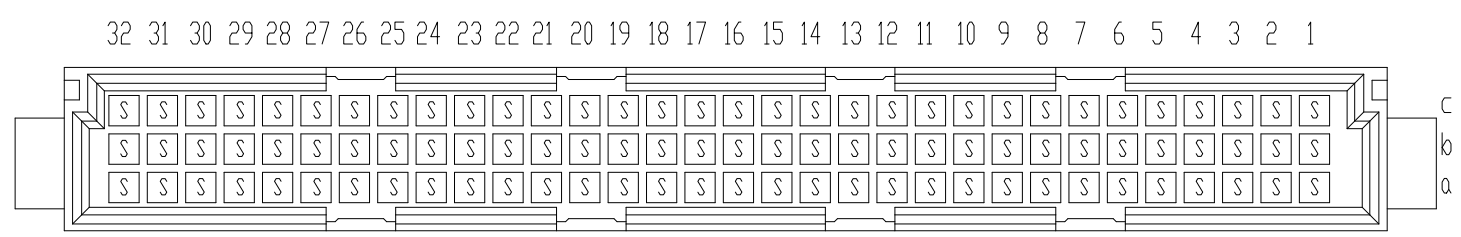


Leiterplatten-Lochbild / PCB drillhole pattern

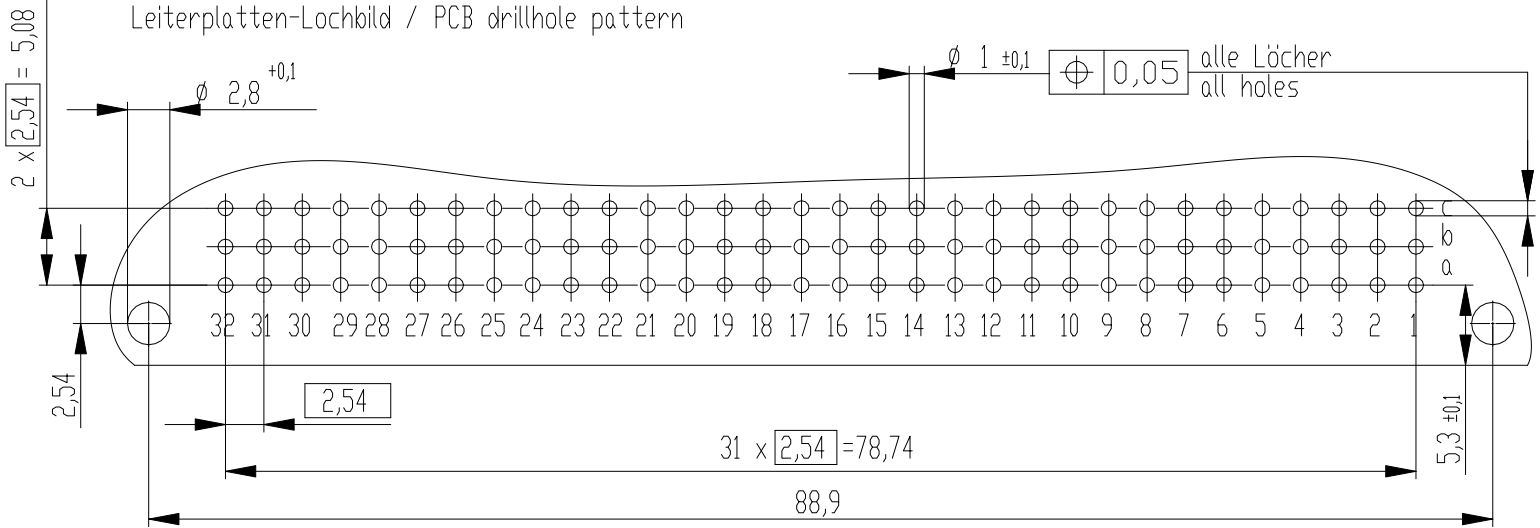

THR = through hole reflow

Anforderungsstufe 2 = 400 Steckzyklen
performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Dimension no.				Tolerances Dim. for Information ISO 8015		 All Dimensions in mm	Scale 2:1									
Customer drawing: THIS DRAWING IS A CONTROLLED DOCUMENT.				Subject to modification without prior notice. Drawing will not be updated.			Material									
<table><tr><td>b</td><td></td><td>08.06.2021</td><td></td></tr><tr><td>Index</td><td></td><td>Date</td><td></td></tr></table>				b		08.06.2021		Index		Date		 TE Connectivity		ERNI-DIN 41612 / IEC-60603-2 Male Connector C 96 THR Type 4		
				b		08.06.2021										
				Index		Date										
©=384063-E		I														
Class		STVC	A3													