

| REVISION RECORD | | | | |
|---|---|---|---|---|
| REV | ECN | DESCRIPTION | DRFT | DATE |

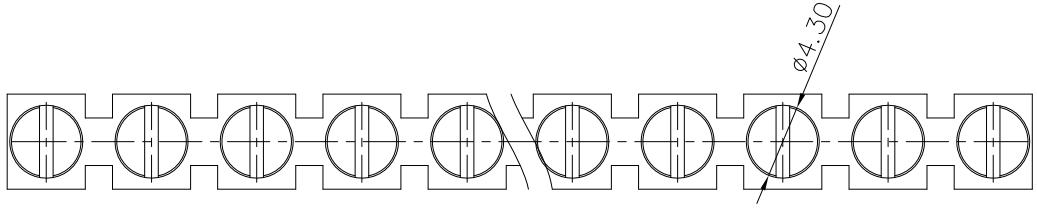



NOTES1:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 6.20mm, Poles : N=02~10P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

| Pitch range in mm | | | Nominal dimension range in mm | | | | | — ⌒ ⌓ | |
|---|---|---|---|---|---|---|---|---|---|
| TO 6 | Over 6 TO 10 | Over 10 TO 24 | TO 30 | Over 30 TO 60 | Over 60 TO 100 | Over 100 TO 150 | Over 150 | 0.1/10 | ∠ |
| ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±2° | |

5. RoHS Compliance

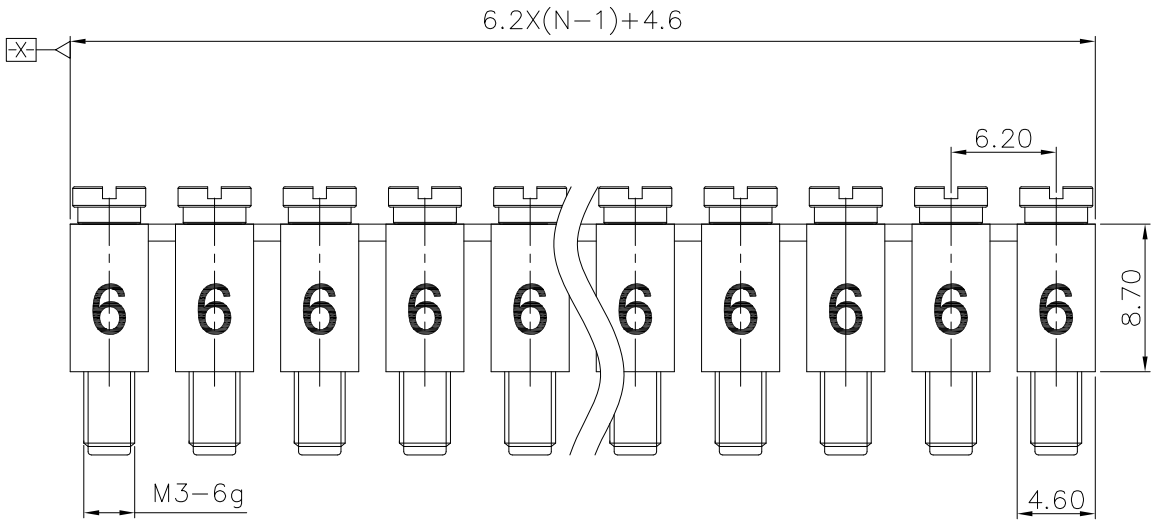

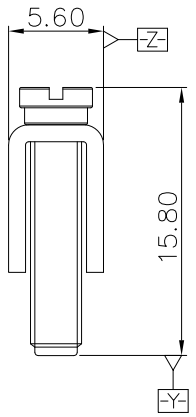
| ITEM | NAME OF PART | MATERIAL | NOTES |
|---|---|---|---|
| 2 | M3"一"Screws | Brass | M3/Ni Plated |
| 1 | Current carrier | Copper | Sn Plated |

DETACHED LISTS

PART NO.: /

APPD:

CHKD:

DRFT: SONG 208.12.29

THIRD ANGLE PROJECTION

DEGSON®

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: FBIXX-6L(H)

TITLE: CUSTOMER DRAWING

REV: D0-1

DRAWING NO.: FBIXX-6-C02

SHEET: 1/1

MM (INCH)

DO NOT SCALE DRAWING

SCALE: 1:1