


未注公差/General tolerances(mm)														
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

Please refer to the 3D model
for those unmarked dimensions

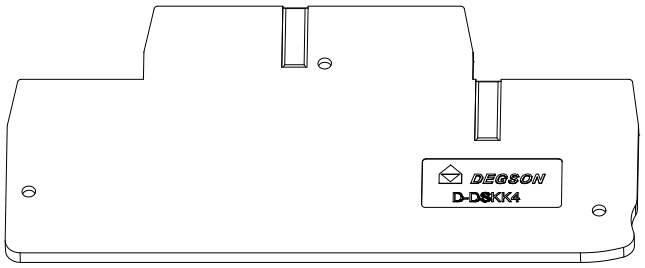

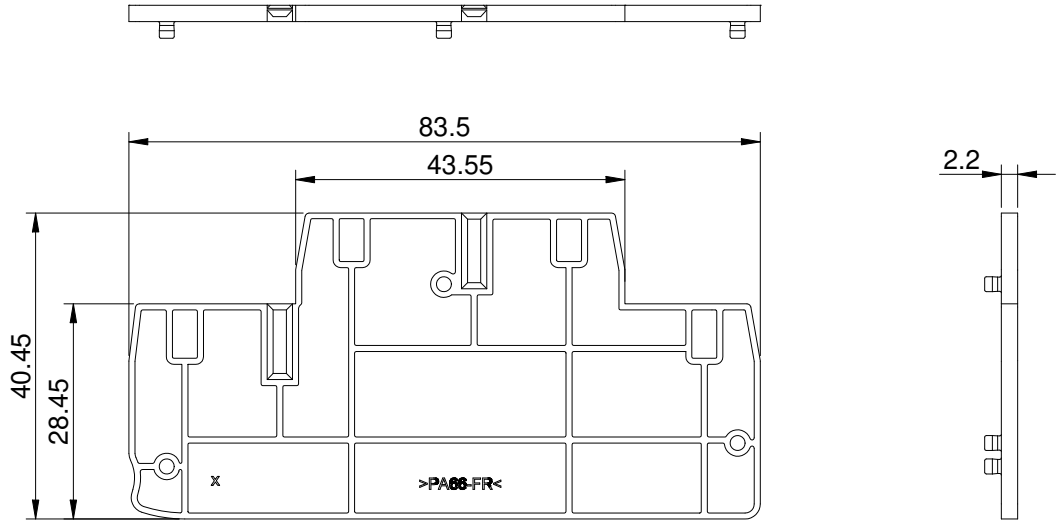

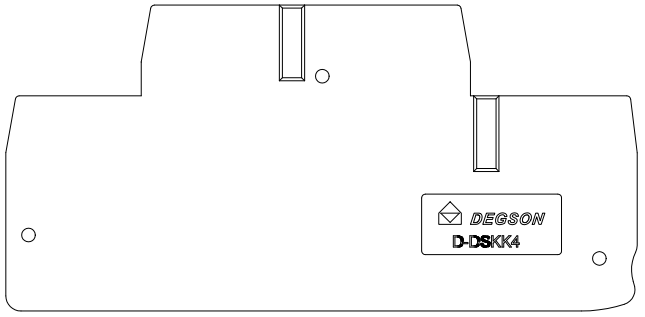

使用温度范围/ Operating temperature(℃)	- 40~+105
符合 RoHS环保要求/ Conform to RoHS	Yes
阻燃等级/ Flame Class	UL94 V-0

DEGSON

APPD:	李根劳	2021.07.23
CHKD:	马恩开	2021.07.23
DRFT:	米帅	2021.07.23

A4

MATERIAL: PA66	SURFACE:
MAT NO./REV: 11060001532-1 / 00	MAT STATUS: work

NAME: D-DSKK4-01P-11-00L(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200004948	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00		ECN19-0097 轨道盖板出货工艺变更	米帅	2021.07.23

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容，侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。