

SUNGMUN ELECTRONICS

THE SWITCH COMPANY



본사/공장
경기도 부천시 오정구 석천로 345, 301동 301호~303호
(삼정동, 부천테크노파크)
TEL 032-328-1941~4 / FAX 032-328-1945

서울매장
서울특별시 구로구 경인로53길 15, 나동 3426호(구로동, 중앙유통단지)
TEL 02-2625-1941~2 / FAX 02-2625-1944


HEAD OFFICE & FACTORY
301-302, Bucheon Technopark, #345 Seokcheon-ro, Ojeong-gu,
Bucheon-si, Gyeonggi-do, The Republic of Korea
TEL 82-32-328-1941~4 / FAX 82-32-328-1945

<http://www.sungmun.com>
E-mail : sungmun@sungmun.co.kr

SUNGMUN Vo.17(2023)



www.sungmun.com

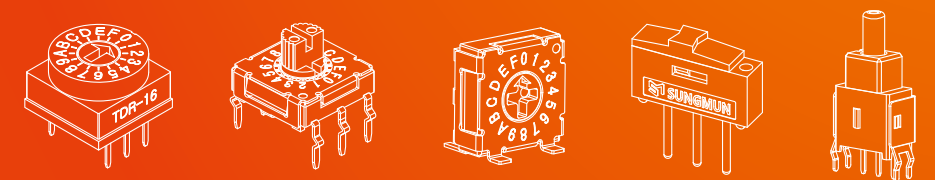

세계로 뻗어가는 기술 선도기업 성문일렉트로닉스(주)

Let's turn
SUNGMUN SWITCH ON
for better future!

CEO 인사말

성문일렉트로닉스(주)를 찾아 주신 고객 여러분의 관심에 깊은 감사를 드립니다.

저희 성문일렉트로닉스(주)는 스위치 및 전자부품의 원천기술로 1995년에 설립되었습니다.

지금까지 축적된 기술력을 바탕으로 고객 니즈 및 통신, 가전, IOT 외 4차 산업 분야에 새롭게 변화하는 트렌드에 맞춰 앞서가는 제품을 개발, 생산하고 있습니다.

또한, 성문 스위치는 전 공정을 자동화로 생산, 검사 공정을 수행함으로써, 국내 뿐만 아니라 유럽, 북미, 아시아 및 오세아니아에 속한 약 60여개 국가의 우수기업으로부터 우수한 품질과 기술력을 인정받아 각종 산업 분야에 널리 사용되어 사랑을 받고 있습니다.

앞으로 성문일렉트로닉스(주)는 신뢰 받는 기업, 고객과 함께 미래를 열어가는 기업으로 세상을 밝히는 빛이 되겠습니다.

감사합니다!

대표이사 이강일

INTRODUCTION

SUNGMUN Electronics was founded in 1995 with original technology in electronic components and switches.

Based on our extensive knowhow and technologies which have been accumulated so far, we are now developing and producing products which meet our client's diverse needs according to the latest trends in communication, home appliances, IoT and 4th Industrial Revolution.


In addition, we inspect and produce products through complete process automation. Our advanced technologies and high quality have been praised by leading companies from nearly 60 different countries in Europe, North Americas, Asia and Oceania as well as in the Republic of Korea. Therefore, our products have been distributed and loved across industries.

We promise that we would evolve into a reliable and trustworthy enterprise, lighting up the world and pioneering the future.

Thank you.


Lee Kang-il, CEO of SUNGMUN Electronics CO., LTD.

성문일렉트로닉스(주)는 전자/통신 장비에 광범위하게 사용되는 스위치 & LED 모듈과 같은 다양한 전자 부품의 개발, 생산, 판매에 전문성을 가지고 있습니다. 본사와 공장은 경기도 부천에 위치하고 있으며 서울 구로에 매장을 보유하고 있습니다. 우리는 ISO 9001 & ISO 14001 품질 · 환경경영시스템을 바탕으로 구매, 생산, 품질, 영업 환경 등 모든 필수 조직을 갖추고 있습니다. 또한 성문일렉트로닉스(주)의 영업망은 해외 지멘스, 삼성전자 & 엘지전자 등을 비롯하여 전 세계 60여개 국가 3,000여곳 이상의 고객을 아우르고 있습니다.

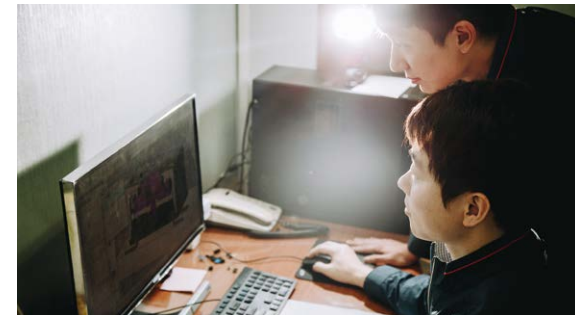


개발

성문일렉트로닉스(주)는 26년 이상 축적된 기술 노하우와 뛰어난 개발 능력을 바탕으로 새로운 신제품 개발과 고객이 요구하는 어떠한 요구사항도 대응할 수 있습니다. 특히 스위치와 LED module에 대한 뛰어난 기술과 지식을 가진 개발 전문가로 구성된 기업부설연구소는 최신개발tool을 가지고 항상 최상의 설계 및 개발을 할 준비를 갖추고 있습니다.

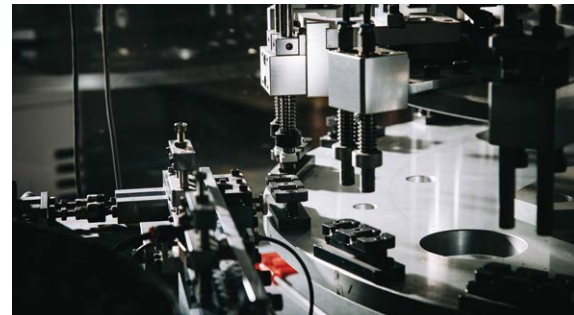

자동 조립 생산

성문일렉트로닉스(주)의 부천 공장은 견고한 관리 시스템을 기반으로한 자동화 생산, 조립, 검사, 포장 설비를 갖추고 있습니다. 특히, 정밀 설계된 금형으로 생산된 부품들은 전 공정을 엄격하게 관리할 수 있는 초석이 됩니다. 인쇄, 검사, 완제품 포장은 자동화된 장비를 통해 이루어지고 있습니다. 최종 제품의 정기적 관리를 통해 자동화 검사의 신뢰성을 높이 고자 노력하고 있습니다.

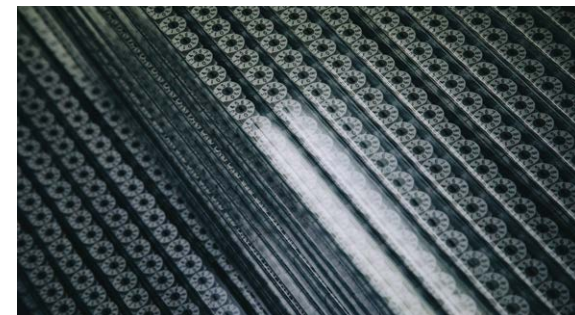

품질 관리

고객의 요청부터 납기까지의 모든 과정은 ISO 9001 & ISO 14001 기준으로 꾸준히 관리 감독하고 있습니다. 검사 공정의 모든 과정은 숙련된 작업자와 인가 받은 담당자에 의해 관리 됩니다. 또한 통계적 공정 관리 (SPC)를 통한 품질 관리는 불량률을 줄이는 데에 지대한 영향을 미칩니다. 고객 불만 발생 시, 우리는 최대한 신속하게 모든 수단을 동원해 근본 원인을 파악하고 그 해답을 제공해 왔습니다. 핵심 부품인 contact & terminal의 금 도금을 통해 로타리 / 미니 슬라이드 / 푸시 버튼 / DIP 스위치 등의 전기적 특성과 내구성을 개선하였습니다. 또한 추적성 관리 시스템을 기반으로 한 제품의 이력 관리가 이루어지며 이 시스템은 고객의 신뢰를 받는 품질을 확보할 수 있게 합니다.



고객 대응


기존의 제품 이외에도, 성문일렉트로닉스(주)의 숙련된 전문가 조직은 customized & customer-specific 제품과 같은 고객의 어떠한 요청에도 빠른 대응이 가능합니다.

Sungmun Electronics has been specialized in developing, producing and marketing various electronic component such as switch and LED module which can be extensively used for electronic and communications equipment. Our HQ and manufacturing site are located in Bucheon(Gyeonggi-do, Korea) and showroom is in Guro Centrol Distribution Complex (Seoul, Korea). We have built all necessary organization like purchasing, production, quality, and marketing environment with certified ISO 9001 and ISO 14001. Also, our marketing range can cover more than 60 countries and 3,000 customers including Siemens(overseas), Samsung Electronics & LG Electronics(domestic).



R & D

More than 26years, our highly-specialized organization for R&D can meet all customers' needs such as developing new products, customized and customer-specific goodd with accumulated technical know-how. This team which consist of design and developing experts has state of the art skills and tools for research and development of switches and LED Modules.

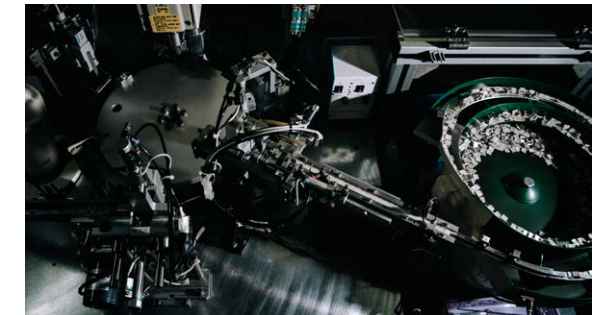

Automated Production

In our factory(Bucheon, Gyeonggi-do, Korea), we have automated facilities for manufacturing, assembly, inspection and packing under solid quality control system. Especially, components which is made with precisely designed tools can be the starting point (or ensure) to control the firm management through whole process. Our automated machines are being applied to printing, inspection and packing finished goods. We are trying to enhance the reliability for atomated inspection through regular mornitoring for final products.



Quality Control

The complete course of action from inquiry to customer is constantly mornitored and managed under the standar of ISO 9001 & ISO 14001. The skilled workers conduct inpection and authorized managers are mornitoring the every step of inspection process. Also quality control through statistical process control (SPC) have a decisive effect on decrease defective product. When it comes to customer complaint, we have found the root cause and given the solution by every conceivable means as fast as we can. For Rotary Dip Switch, Mini Slide Switch, Push Button Switch and Dip Switch, Electrical Characteristic and durability were improved by Au plated contacts and terminals. The background of products can be controled under traceabilty control sytem and this sysetem can get the quality which is trusted by customers.



Customer Response


Beside existing products, our highly-specialized organization can rapidly give solutions to any kind of customers' request such as customized and customer-specific goodd.

성문전자 설립 •	1995	• Established Sungmun Electronics
DIP SWITCH 국산화 개발 •	1997	• Developed DIP SWITCH
PUSH BUTTON SWITCH • 국산화 개발 및 특허출원	1998	• Developed and submitted Patent Application for • PUSH BUTTON SWITCH
LED MODULE 국산화 개발 •	1999	• Developed LED MODULE
ISO 9001:2000 인증 •	2002	• Obtained ISO 9001
ISO 14001 인증 취득 •	2003	• Obtained ISO 14001
 회사확장이전 및 상호변경 • [성문일렉트로닉스(주)]	2004	• Relocated and changed company name (Sungmun Electronics Co., LTD)
ROTARY DIP SWITCH(10x10 size) • 최초 국산화 개발 성공 및 특허출원	2005	• Developed and submitted Patent Application for ROTARY DIP SWITCH(10X10)
중소기업청 기술혁신형 중소기업(이노비즈) 인증 •	2006	• Obtained certification for INNO-BIZ
ROTARY DIP SWITCH 자동화 생산 개시 • 경기도 유망중소기업 선정 •	2007	• Started automated production for ROTARY DIP SWITCH(10X10). • Selected as a Promising Small and Medium-sized Enterprises by Gyeonggi-do Province
MINI ROTARY DIP SWITCH • 최초 국산화 개발 성공 및 특허출원	2008	• Developed and submitted Patent Application for MINI ROATARY DIP SWITCH
MINI ROTARY DIP SWITCH 자동화 생산 개시 •	2010	• Started automated production for MINI ROTARY DIP SWITCH (7.4X7.4)

100만불 수출탑 수상 • 전자·IT의 날 경기도지사 표창 •	2011	• Awarded 1 Million Dollar export prize • Awarded Governor of Gyeonggi-do Province Citation for Electronic & IT Day
전자·IT의 날 국무총리 표창 •	2012	• Awarded Prime Minister Citation for Electronic & IT Day
전자·IT의 날 산업통상자원부 장관 표창 •	2013	• Awarded Minister of Commerce and Industry Citation for Electronic & IT Day
모범납세자 표창 (국세청장상) •	2014	• Awarded Best Taxpayer Prize (Chief of National Tax Service)
특허경영대상 표창 (특허청) • MINI SLIDE SWITCH SMD TYPE 개발 완료 • (NSI Series)	2015	• Awarded Patent Management Prize (Korea Intellectual Property Office) • Developed SMD Type MINI SLIDE SWITCH (NSI-Series)
서울매장 이전 (구로 중앙유통단지 나동 3426호) • COMPACT ROTARY DIP SWITCH • (G-Series) 개발 전자·IT의 날 산업통상자원부장관 표창 •	2016	• Opened store in Seoul (Guro Jungang Circulation Complex) • Developed COMPACT (H 3.0mm) MINI ROTARY DIP SWITCH (GS-Series) • Awarded Minister of Commerce and Industry Citation for Electronic & IT Day
기업부설연구소 등록 • 슬림형 (H 4.5mm) ROTARY DIP SWITCH • 3x3 Terminal 개발 완료 (U-Series) 슬림형 (H 4.5mm) ROTARY DIP SWITCH • 4x1 Terminal 개발 완료 (H-Series) 대통령 표창 •	2017	• Established and registered a business-proof laboratory • Developed Low Height (H 4.5mm) ROTARY DIP SWITCH 3x3 Terminal (U-Series) • Developed Low Height (H 4.5mm) ROTARY DIP SWITCH 4x1 Terminal (H-Series) • Awarded a presidential citation for men of small and Medium-sized enterprises merit
MINI ROTARY DIP SWITCH ANGLE • SMD TYPE (7.2x7.2 size) 개발  SUNGMUN CI 변경 •	2018	• Mini Rotary Dip Switch Angle SMD (7.2x7.2 size) developed • Renewal CI 
전자 · IT의 날 산업통상자원부장관 표창 • 중소벤처기업부 장관 표창 •	2019	• Obtained the Commendation of the Minister of Trade, Industry and Energy on Electronics & IT Day
MINI SLIDE SWITCH (SSI, NSI) • 자동화 생산 개시	2020	• Started automated Production for Mini Slide Switch (SSI, NSI)

Index

► ROTARY DIP SWITCH

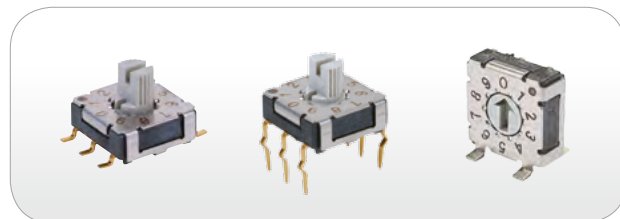


G Series **10**

COMPACT ROTARY DIP SWITCH
7.2 x 7.2 SIZE, Height : 2.9mm



M Series **14**

MINI ROTARY DIP SWITCH
7.4 x 7.4 x 3.65 SIZE

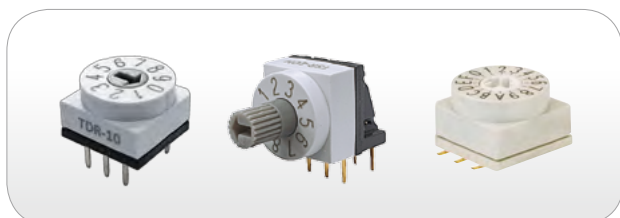

T/S/Q Series **18**

ROTARY DIP SWITCH
10 x 10 x 6.5 SIZE (3x3 Ter')




F/E Series **21**

ROTARY DIP SWITCH
10 x 10 x 6.5 SIZE (4x1 Ter')



U Series **24**

ROTARY DIP SWITCH
10 x 10 x 4.5 SIZE (3x3 Ter')

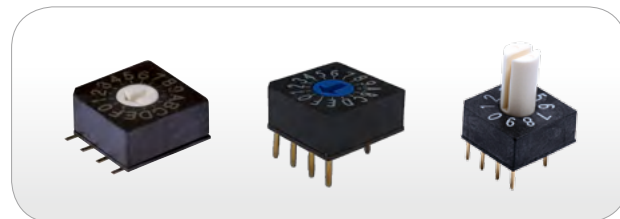

H Series **27**

ROTARY DIP SWITCH
10 x 10 x 4.5 SIZE (4x1 Ter')




RK Series **32**

ACCESSORY

Index

► MINI SLIDE SWITCH

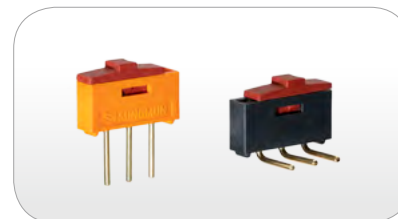


SSI Series **34**

CHANGE OVER TYPE



NSI-10 Series **35**


CHANGE OVER SMD TYPE

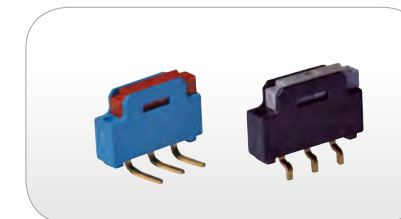

NSI-20 Series **36**


SWITCHING TYPE

► DIP SWITCH

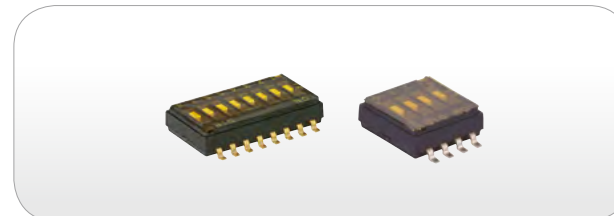


SHK Series **39**

HALF PITCH(1.27mm) DIP SWITCH

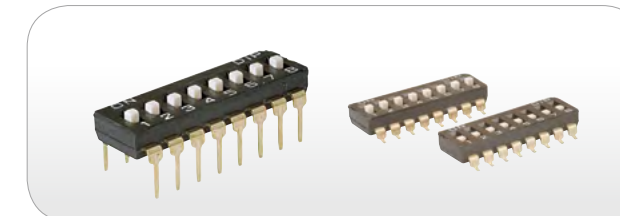


SKD/SKS Series **40**

IC TYPE DIP SWITCH

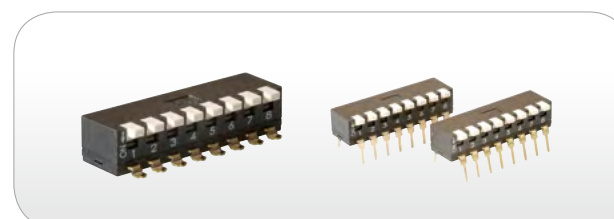


SKP Series **41**

PIANO TYPE DIP SWITCH

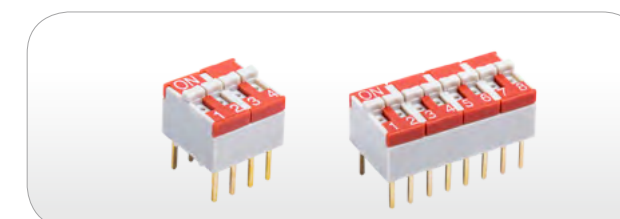

BSD Series **42**

BOX TYPE DIP SWITCH

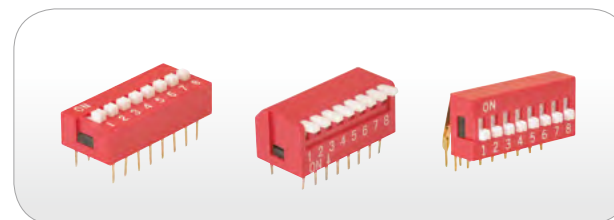

DS/DA/DP Series **43**


Index

▶ MINIATURE PUSH BUTTON SWITCH




SP Series 45
Water Proof

▶ ILLUMINATE PUSH BUTTON SWITCH

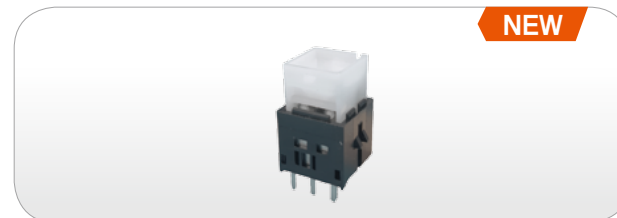

SLP Series 52

▶ TACT SWITCH

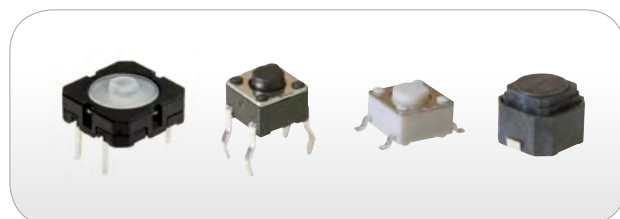


STR/STP Series 54
Mini Tact Switch

▶ HOOK SWITCH



SH Series 65

▶ PUSH SWITCH

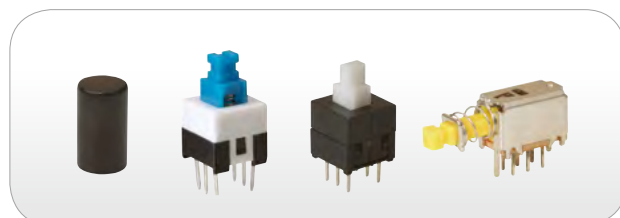

SPS Series 66

▶ LED MODULE



LED Module 68

▶ OPTO PIPE/FRAME GROUND/GUIDE RAIL



SPLE / FGR / SCG Series 76

▶ CHIP LED/LED LAMP




CHIP LED/LED Lamp 78

ROTARY DIP SWITCH

COMPACT ROTARY DIP SWITCH (G Series) 10	7.2 x 7.2 x 2.9 SIZE
MINI ROTARY DIP SWITCH (M Series) 14	7.4 x 7.4 x 3.65 SIZE
ROTARY DIP SWITCH (T/S/Q Series) 18	10 x 10 x 6.5 SIZE (3x3 Ter')
ROTARY DIP SWITCH (F/E Series) 21	10 x 10 x 6.5 SIZE (4x1 Ter')
ROTARY DIP SWITCH (U Series) 24	10 x 10 x 4.5 SIZE (3x3 Ter')
ROTARY DIP SWITCH (H Series) 27	10 x 10 x 4.5 SIZE (4x1 Ter')
ACCESSORY (RK Series) 32	

COMPACT ROTARY DIP SWITCH 7.2x7.2 Size, Height: 2.9mm

NEW

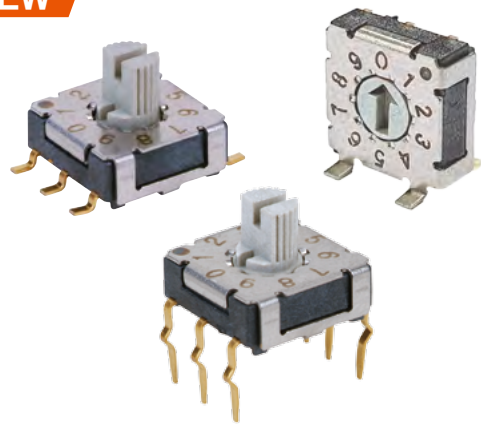


General Specification


- Rating :** 100mA, DC 5V (Switching)
100mA, DC 50V (None-Switching)
- Contact Resistance :** 100mΩ Max.
- Insulation Resistance :** 100MΩ Min. at DC 100V
- Operating Force :** 200gf Max.
- Life Cycle :** 25,000 steps
- Sealing :** IP67 (Dust & water proof)

GENERAL DIMENSION


Through Hole Type Layout

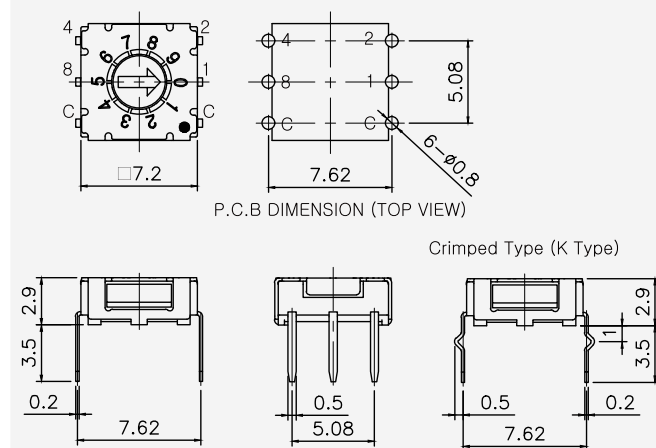


SMD Gull Wing Type Layout

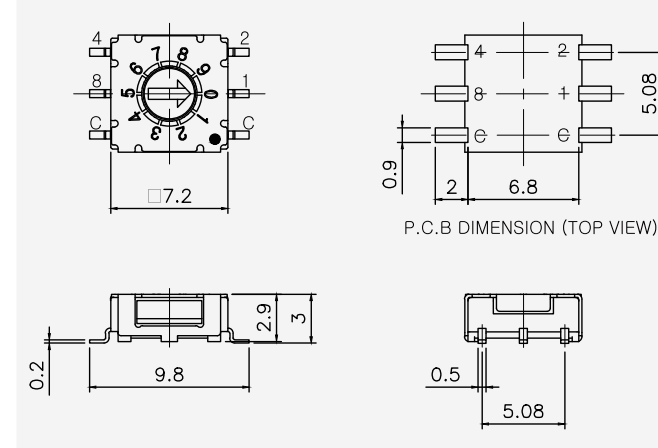

SMD J-Hook Type Layout

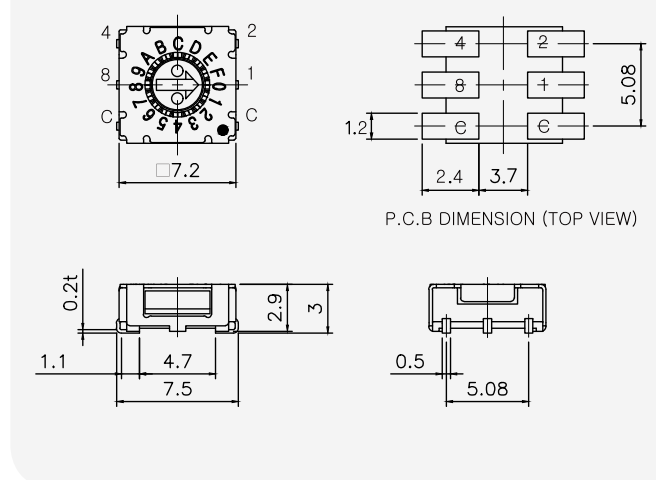

Angle Half pitch SMD Type Layout (Ter' 5)

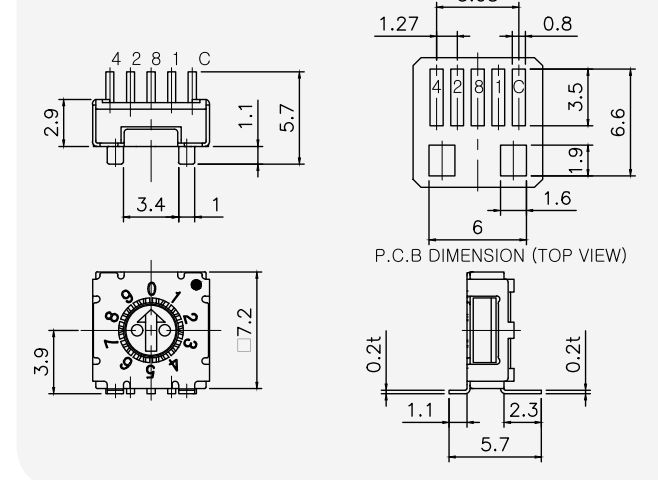


COMPACT ROTARY DIP SWITCH 7.2x7.2 Size, Height: 2.9mm

HOW TO ORDER

GS	D	R	10	S	TR
Type	Actuator	Code	Position	Terminal	Packing
GS 7.2 X 7.2 Size Height 2.9mm	D Arrow (Height = 0mm) M Slotted spindle (Height = 3mm) E Cross (Height = 0mm) P Arrow (Height = 3mm)	R Real Code C Complement Code G Gray code *Other codes are available upon the request.	04 04 Position 10 10 Position 16 16 Position	- Through-Hole (Ter' 3 X 3) S SMD Gull Wing K Crimped J J SMD M Angle Half Pitch (Through Hole) MS Angle Half Pitch SMD (Ter'5)	- Tube Packing TR Reel Packing


1. Type

GS Type

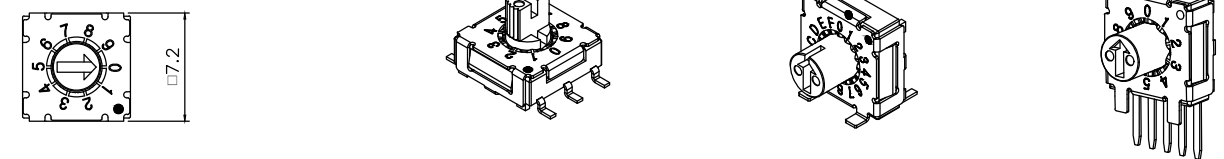


2. Actuators


D Arrow (Height = 0mm)

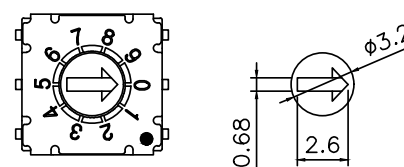



M Slotted Spindle Height = 3mm

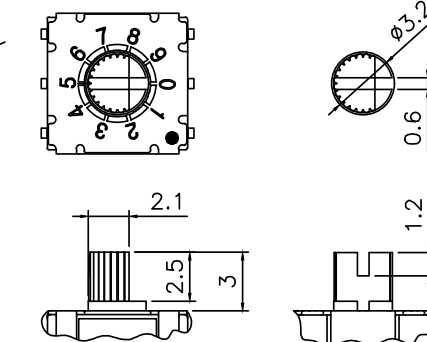

E Cross (Height = 0mm)

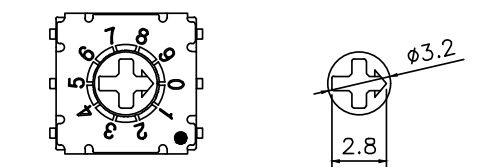


P Arrow (Height = 3mm)

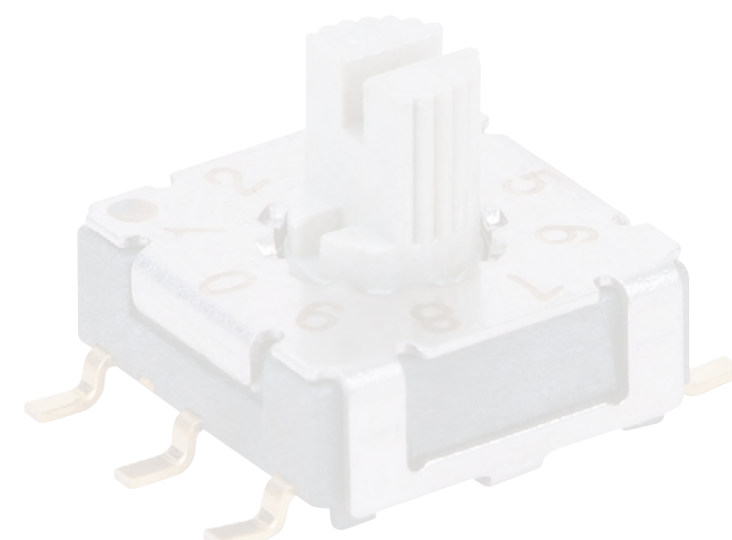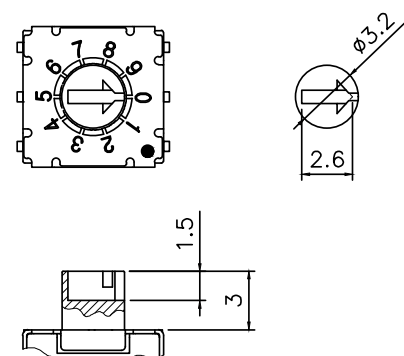

MINI ROTARY DIP SWITCH 7.4x7.4 Size, Height: 3.65mm

MS
MA
MD
Series

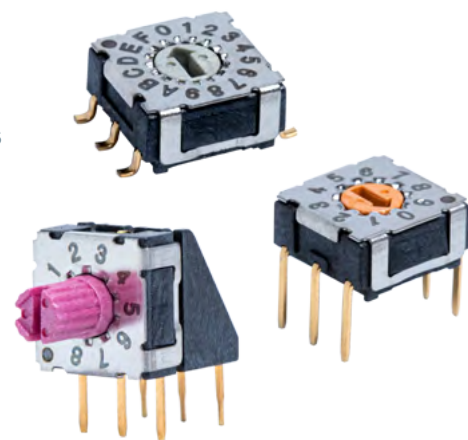


General Specification


- Rating :** 100mA, DC 42V (Switching)
400mA, DC 42V (None-Switching)
- Contact Resistance :** 80mΩ Max.
- Insulation Resistance :** 100MΩ Min at DC 250V
- Operating Force :** 120±30gf Max.
- Life Cycle :** 25,000 steps
- Sealing :** IP67 (Dust & Water proof)

GENERAL DIMENSION


Through Hole Type Layout

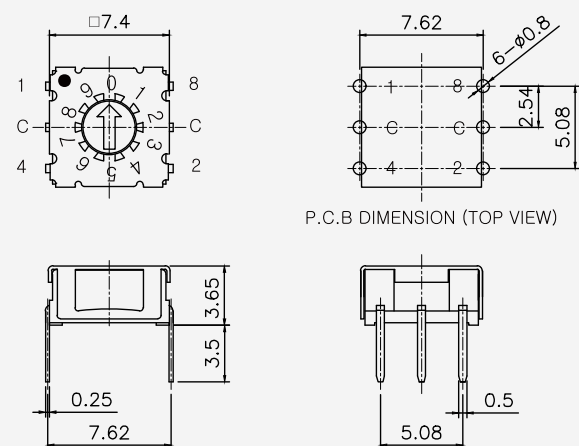


SMD Gull Wing Type Layout

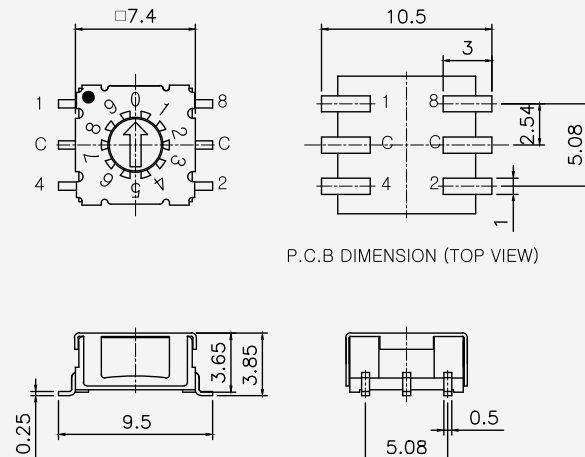

SMD - J Hook Type Layout

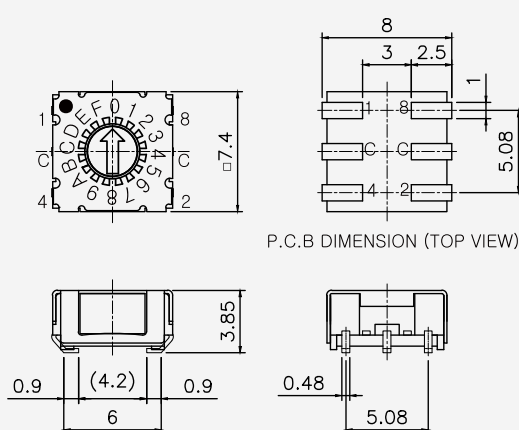

Angle Type Layout (H:5.08mm, H1:2.54mm)

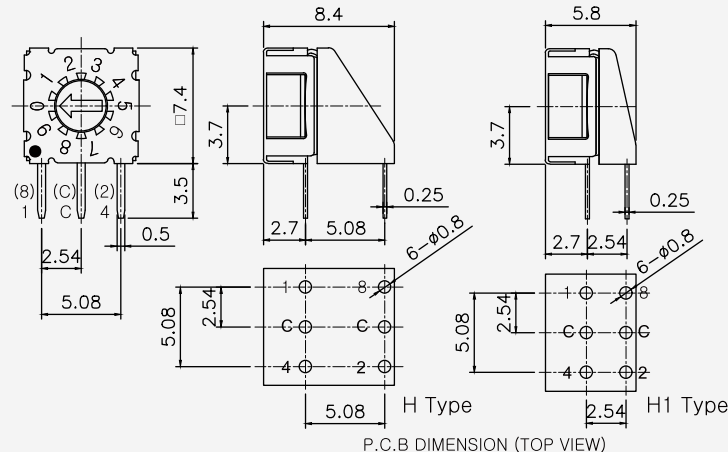

MINI ROTARY DIP SWITCH 7.4x7.4 Size, Height: 3.65mm

HOW TO ORDER

MS

Type

- MS** Position of printed No.0 (0°)
Ter' Circuit (1-C-4 / 8-C-2)
MA Position of printed No.0 (-90°)
Ter' Circuit (1-C-4 / 8-C-2)
MD Position of printed No.0 (-90°)
Ter' Circuit (1-C-2 / 4-C-8)
H Type (+90°)

D

Actuator

- D** Arrow (Height = 0mm)
M Slotted spindle (Height = 3mm)
S Spindle (Height = 4.5mm)
K Slotted spindle (Height = 4.2mm)
G Slotted spindle (Height = 1mm)

R

Code

- R** Real Code
C Complement Code
G Gray Code
*Other codes are available upon the request.

10

Position

- 04** 4 Position
10 10 Position
16 16 Position

S

Terminal

- Through-Hole (Ter' 3x3)
C Through-Hole (Ter' 3x2)
S SMD Gull Wing (Ter' 3x3)
SC SMD Gull Wing (Ter' 3x2)
J J - Hook SMD (Ter' 3x3)
JC J - Hook SMD (Ter' 3x2)
H Right Angle 5.08mm
H1 Right Angle 2.54mm


TR

Packing


- Tube Packing
TR Reel Packing

1. Type


MS Type

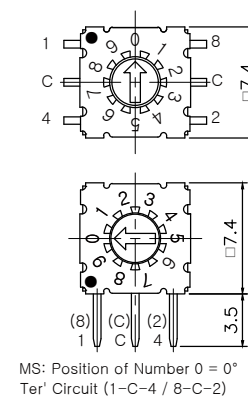


MA Type

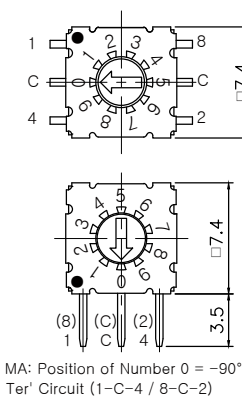

MD Type

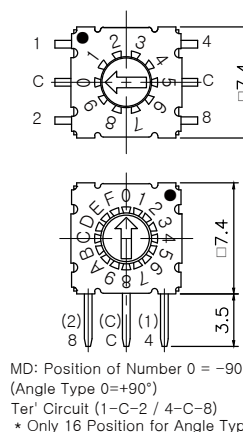


MSKR-10S-2 Type

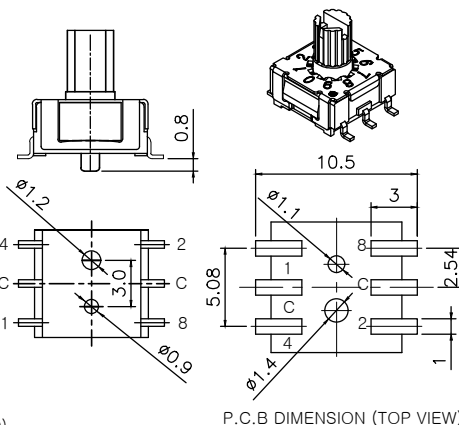


2. Actuators


D Arrow (Height = 0mm)




S Spindle (Height = 4.5mm)




K Slotted Spindle (Height = 4.2mm)



G Slotted Spindle (Height = 1mm)



M Slotted Spindle (Height = 3mm)



MINI ROTARY DIP SWITCH 7.4x7.4 Size, Height: 3.65mm

3. Code & Position

R

Real Code

16 Position

10 Position

Real Code						
	C	1	2	4	8	
0	•					0
1	•	•				1
2	•	•	•			2
3	•	•	•	•		3
4	•	•	•	•	•	4
5	•	•	•	•	•	5
6	•	•	•	•	•	6
7	•	•	•	•	•	7
8	•	•	•	•	•	8
9	•	•	•	•	•	9
10	•	•	•	•	•	A
11	•	•	•	•	•	B
12	•	•	•	•	•	C
13	•	•	•	•	•	D
14	•	•	•	•	•	E
15	•	•	•	•	•	F

C

Complement Code

16 Position

10 Position

Complement Code						
	C	1	2	4	8	
0	•	•	•	•	•	0
1	•	•	•	•	•	1
2	•	•	•	•	•	2
3	•	•	•	•	•	3
4	•	•	•	•	•	4
5	•	•	•	•	•	5
6	•	•	•	•	•	6
7	•	•	•	•	•	7
8	•	•	•	•	•	8
9	•	•	•	•	•	9
10	•	•	•	•	•	A
11	•	•	•	•	•	B
12	•	•	•	•	•	C
13	•	•	•	•	•	D
14	•	•	•	•	•	E
15	•	•	•	•	•	F

G

Gray Code

10 Position

16 Position

Gray Code						
	C	1	2	4	8	
0	•	•	•	•	•	0
1	•	•	•	•	•	1
2	•	•	•	•	•	2
3	•	•	•	•	•	3
4	•	•	•	•	•	4
5	•	•	•	•	•	5
6	•	•	•	•	•	6
7	•	•	•	•	•	7
8	•	•	•	•	•	8
9	•	•	•	•	•	9

Gray Code						
	C	1	2	4	8	
0	•	•	•	•	•	0
1	•	•	•	•	•	1
2	•	•	•	•	•	2
3	•	•	•	•	•	3
4	•	•	•	•	•	4
5	•	•	•	•	•	5
6	•	•	•	•	•	6
7	•	•	•	•	•	7
8	•	•	•	•	•	8
9	•	•	•	•	•	9
10	•	•	•	•	•	A
11	•	•	•	•	•	B
12	•	•	•	•	•	C
13	•	•	•	•	•	D
14	•	•	•	•	•	E
15	•	•	•	•	•	F

M

Decimal Code

04 Position

Decimal Code					
	C	0	1	2	3
0	•	•	•	•	•
1	•	•	•	•	•
2	•	•	•	•	•
3	•	•	•	•	•

(Top View)

• 1 2 •

• C C •

• 0 3 •

Only MS Type

N

Decimal Code

04 Position

Decimal Code					
	C	1	2	3	4
1	•	•	•	•	•
2	•	•	•	•	•
3	•	•	•	•	•
4	•	•	•	•	•

(Top View)

• 1 4 •

• C C •

• 3 2 •

Only MS Type

* Other special codes are available upon the request.

4. Terminal

T	C	S/SC
Through-Hole (Ter' 3x3)	Through-Hole (Ter' 3x2)	SMD Type (Ter' 3x3, Ter' 3x2)
P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	S: 3X3 Ter' SC: 3X2 Ter' P.C.B DIMENSION (TOP VIEW)
J/JC	H	H1
J - Hook SMD (Ter' 3x3, Ter' 3x2)	Angle Type 5.08mm (Ter' 3x3)	Angle Type 2.54mm (Ter' 3x3)
J: 3X3 Ter' JC: 3X2 Ter' P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)


5. Packing

T	TR
Tube Packing (Q'ty: 70 pcs / Tube) & (Q'ty: 65 pcs / Angle Type Tube)	Reel Packing (See Page 17)
D Type Actuator	S, K Type Actuator
SMD & J - Hook Type	Angle Type (H, H1)

MINI ROTARY DIP SWITCH 7.4x7.4 Size, Height: 3.65mm Tape & Reel Packing

1. 'D' Type Actuator with SMD / J Terminal


(MSDR-S)
(MSDR-J)

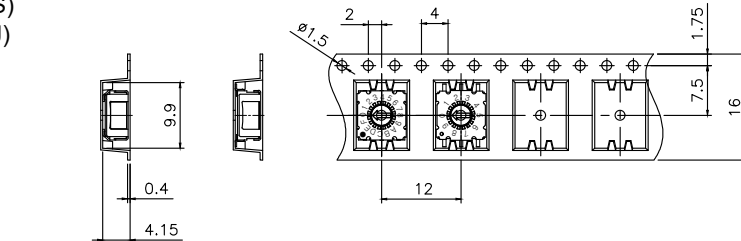

Units(pcs)
1,300

2. 'S' & 'K' Type Actuator with SMD / J Terminal


(MSSR-S)
(MSSR-J)
(MSKR-S)
(MSKR-J)

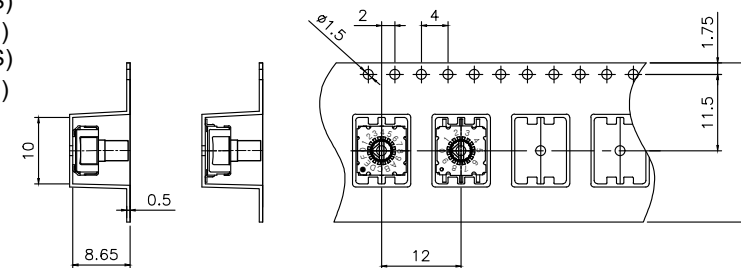


Units(pcs)
600

3. 'G' Type Actuator with SMD Terminal / J Terminal


(MSGR-S)
(MSGR-J)

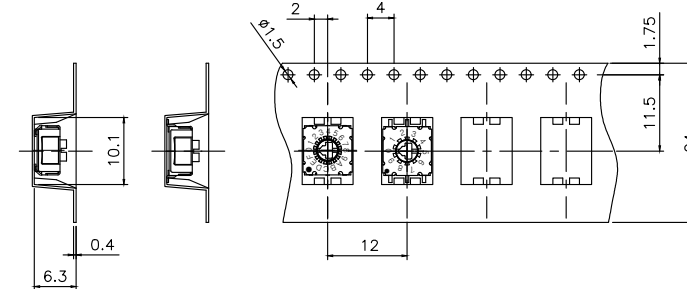

Units(pcs)
800

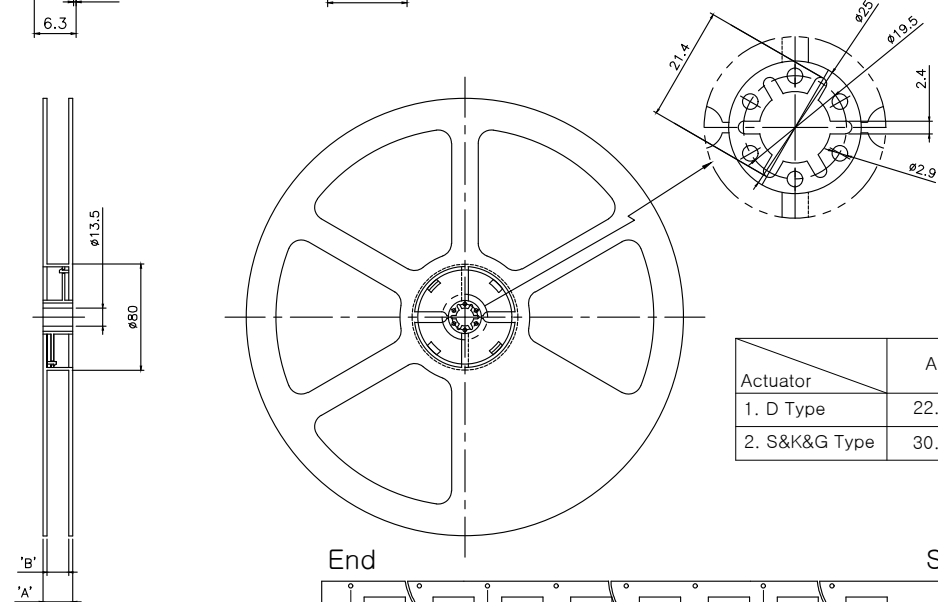

Actuator	A	B
1. D Type	22.4	16.4
2. S&K&G Type	30.4	24.4

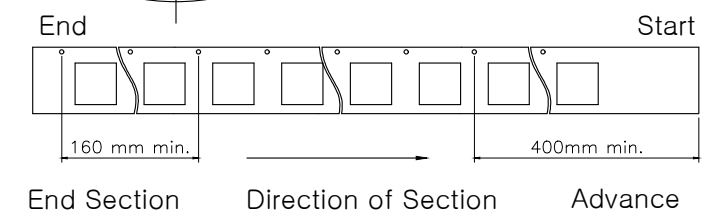

RoHS T / S / Q Series

ROTARY DIP SWITCH 10x10 Size, Height: 6.5mm, 3x3 Terminal

T
S
Q
Series




General Specification

- Rating :** 150mA, DC 42V (Switching)
200mA, DC 42V (None-Switching)
- Contact Resistance :** 80mΩ Max.
- Insulation Resistance :** 100MΩ Min at DC 250V
- Operating Force :** 700gf Max.
- Life Cycle :** 10,000 steps
- Sealing :** IP67 (Dust & Water proof)
*Except cross type of Actuator ("E" Type)


*See page 32 for Accessories.

GENERAL DIMENSION


Through Hole Type Layout

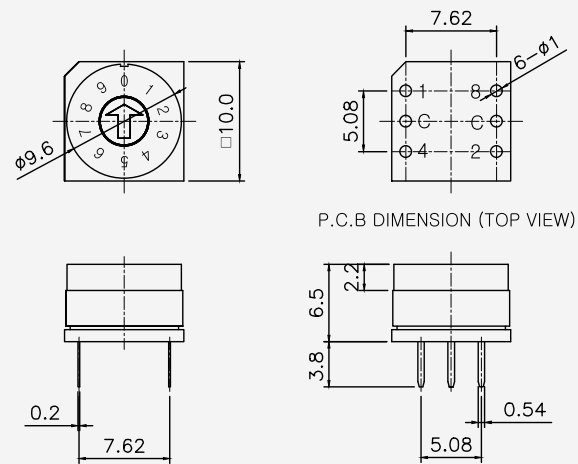


SMD Gull Wing Type Layout

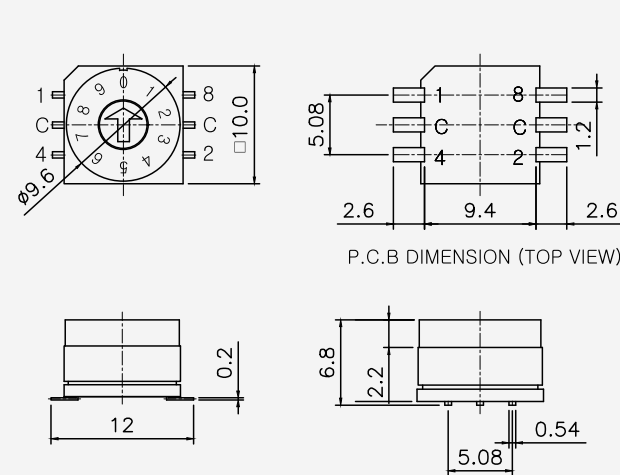

Angle Type Layout (H:5.08mm)

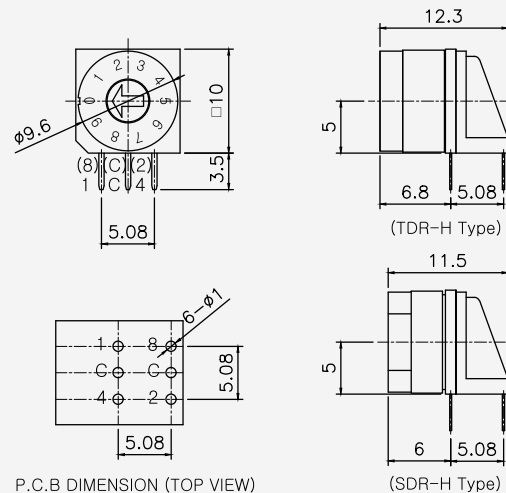

Angle Type Layout (H1:2.54mm)

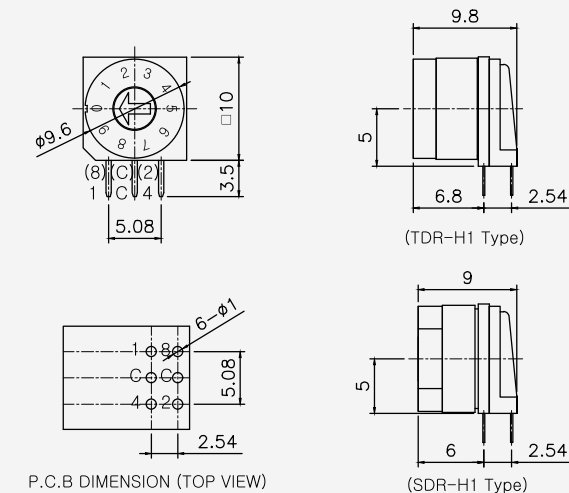

RoHS T / S / Q Series


ROTARY DIP SWITCH 10x10 Size, Height: 6.5mm, 3x3 Terminal

HOW TO ORDER


T	D	R	—	10	S	TR
Cover Type	Actuator	Code		Position	Terminal	Packing
T Round (Ter' 3x3) S Octagon (Ter' 3x3) Q Square (Ter' 3x3)	D Arrow (Height = 0mm) S Height = 7.3mm P Height = 1.0mm E Cross (Height = 0mm)	R Real Code C Complement Code G Gray Code *Other special codes are available upon the request.	—	04 4 Position 06 6 Position 08 8 Position 10 10 Position 16 16 Position	S Through-Hole (Ter' 3x3) C Through-Hole (Ter' 3x2) S SMD Gull Wing (Ter' 3x3) SC SMD Gull Wing (Ter' 3x2) H Right Angle 5.08mm H1 Right Angle 2.54mm	TR Reel Packing — Tube Packing

1. Cover Type


T Type (Round)



S Type (Octagon)




Q Type (Square)




2. Actuator


D Arrow (Height = 0mm)




S Height = 7.3mm



P Height = 1mm



E Cross (Height = 0mm)



* Only T Type Right Angle : 6.3mm

RoHS T / S / Q Series

ROTARY DIP SWITCH 10x10 Size, Height: 6.5mm, 3x3 Terminal

3. Code & Position

R	Real Code	C	Complement Code	G	Gray Code
04 POSITION					
06/08/10/16 POSITION					

* See page 30 for special codes.

4. Terminal

-	Through-Hole (Ter' 3x3)	C	Through-Hole (Ter' 3x2)	S	SMD Type (Ter' 3x3)
P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)
SC	SMD Type (Ter' 3x2)	H	Angle Type 5.08mm (Ter' 3x3)	H1	Angle Type 2.54mm (Ter' 3x3)
P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)	P.C.B DIMENSION (TOP VIEW)

5. Packing

-	Tube Packing (Q'ty: 50Pcs/Tube)	TR	Reel Packing (See page 31)
D Type Actuator	Right Angle Type (D/E Actuator H1 Only)	S Type Actuator	SMD Type
12.8	12.8	16.2	16.2
5.5	5.5	5.4	5.4
16.7	16.7	20.7	20.7
3.8	3.8	21.5	21.5
16	16	16	16
Right Angle Type (H, H1)			

RoHS F / E Series

ROTARY DIP SWITCH 10x10 Size, Height: 6.5mm, 4x1 Terminal

F
E
Series



NEW


General Specification

- Rating :** 150mA, DC 42V (Switching)
200mA, DC 42V (None-Switching)
- Contact Resistance :** 80mΩ Max.
- Insulation Resistance :** 100MΩ Min at DC 250V
- Operating Force :** 700gf Max.
- Life Cycle :** 10,000 steps
- Sealing :** IP67 (Dust & Water proof)
*Except cross type of Actuator ("E" Type)


*See page 32 for Accessories.

GENERAL DIMENSION


Through Hole Type Layout

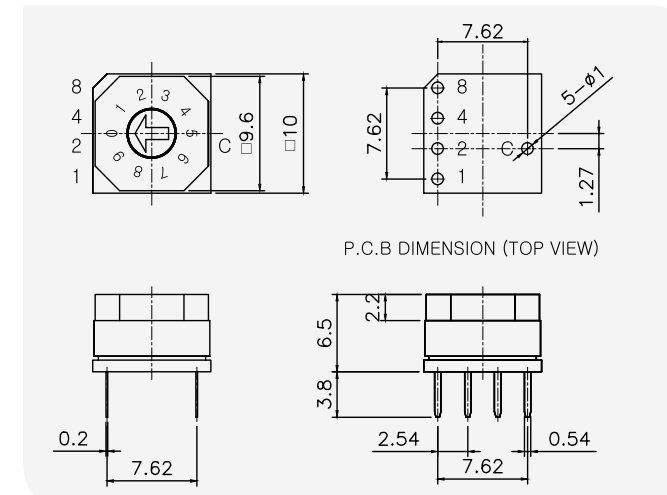


SMD Gull Wing Type Layout

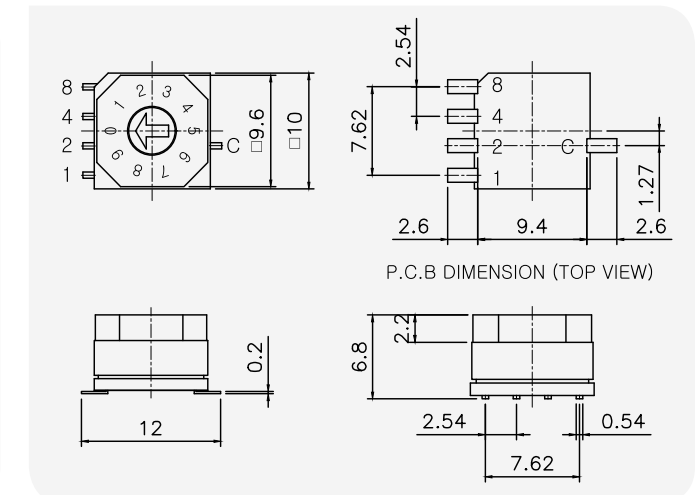

Angle Type Layout (H:5.08mm)

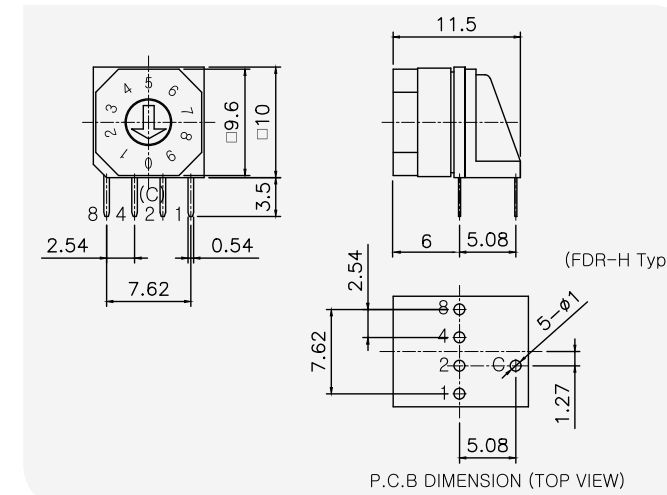

Angle Type Layout (H1:2.54mm)

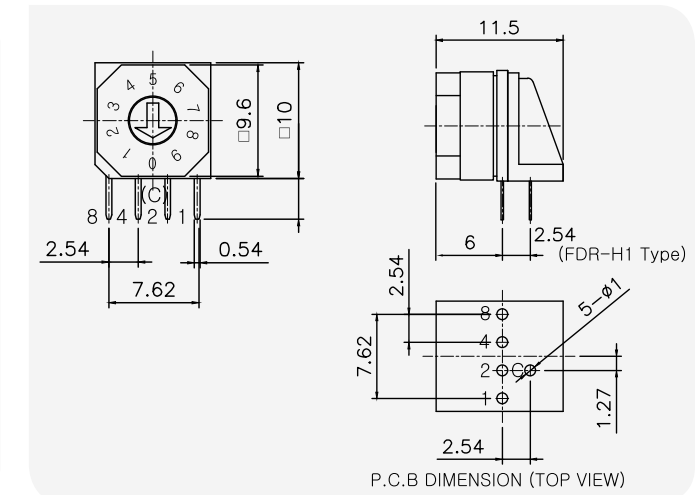

RoHS F / E Series

ROTARY DIP SWITCH 10x10 Size, Height: 6.5mm, 4x1 Terminal

HOW TO ORDER

F

Cover Type

F Octagon Type (Ter' 4x1)
E Square (Ter' 4x1)

D

Actuator

D Arrow (Height = 0mm)
S Height = 7.3mm
P Height = 1.0mm
E Cross (Height = 0mm)

R

Code

R Real Code
C Complement Code
G Gray Code
*Other special codes are available upon the request.

10

Position

04 4 Position
06 6 Position
08 8 Position
10 10 Position
16 16 Position

S

Terminal

- Through-Hole (Ter' 4x1)
S SMD Gull Wing (Ter' 4x1)
H Right Angle 5.08mm
H1 Right Angle 2.54mm


-

Packing


- Tube Packing
TR Reel Packing

1. Cover Type


F Type [Octagon] 4x1 Ter'




F: Octagon



E Type [Square] 4x1 Ter'





E: Square





2. Actuator



D Arrow (Height = 0mm)





S Height = 7.3mm



P Height = 1mm



E Cross (Height = 0mm)



RoHS F / E Series

ROTARY DIP SWITCH 10x10 Size, Height: 6.5mm, 4x1 Terminal

3. Code & Position

R Real Code

Position	04	06	08	10	16
Real Code					
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

04/06/08/10/16 POSITION

C Complement Code

Position	04	06	08	10	16
Complement Code					
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

04/06/08/10/16 POSITION


S Decimal Code

Position	04	06	08	10	16
Decimal Code					
0					
1					
2					
3					
4					

* Special Codes are available upon the request.


4. Terminal

- Through-Hole (Ter' 4x1)

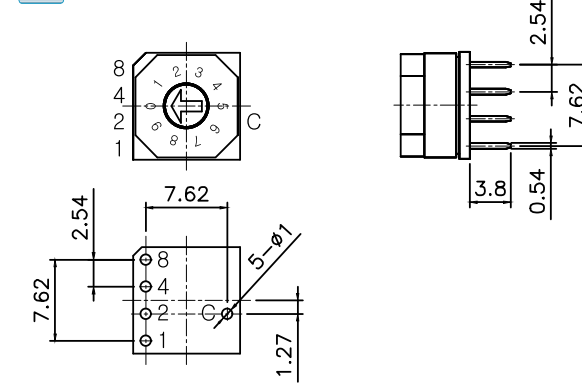


P.C.B DIMENSION (TOP VIEW)

S SMD Type (Ter' 4x1)

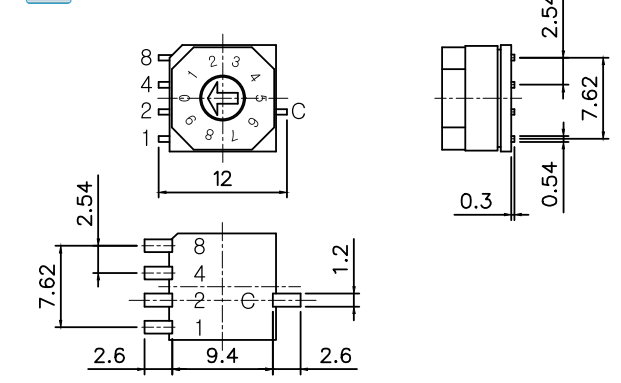


P.C.B DIMENSION (TOP VIEW)

H Angle Type 5.08mm (Ter' 4x1)

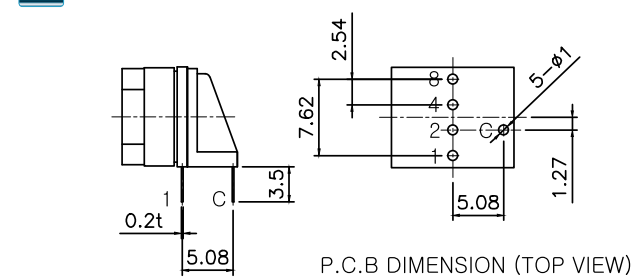

P.C.B DIMENSION (TOP VIEW)


H1 Angle Type 2.54mm (Ter' 4x1)

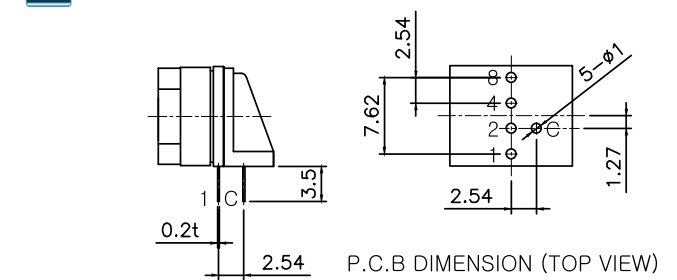

P.C.B DIMENSION (TOP VIEW)

5. Packing

- Tube Packing (Q'ty: 50Pcs/Tube)

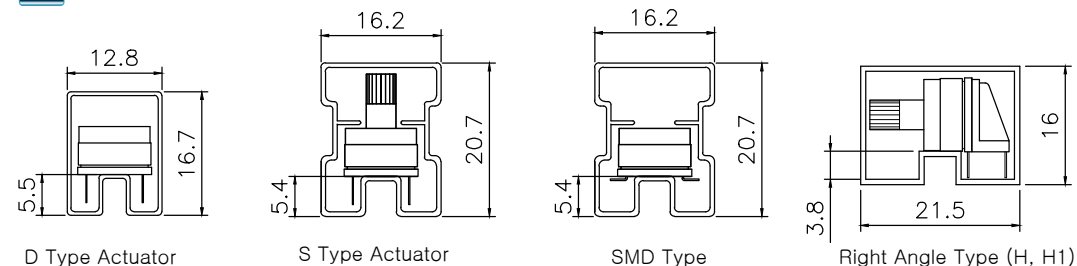

D Type Actuator

S Type Actuator

SMD Type

Right Angle Type (H, H1)


TR

Reel Packing (See Page 31)

ROTARY DIP SWITCH 10x10 Size, Height: 4.5mm, 3x3 Terminal

NEW

U
UA
Series

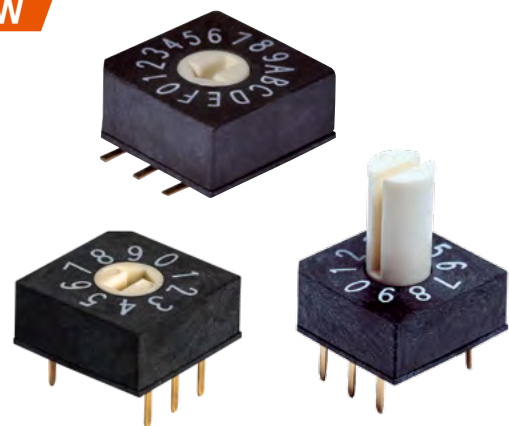


General Specification


- Rating :** 25mA, 12V DC (Switching)
25mA, 24V DC (None-Switching)
- Contact Resistance :** 100mΩ Max.
- Insulation Resistance :** 100MΩ Min at DC 250V
- Operating Force :** 700gf Max.
- Life Cycle :** 10,000 steps
- Sealing :** IP67 (Dust & Water proof)

GENERAL DIMENSION


Through Hole Type Layout

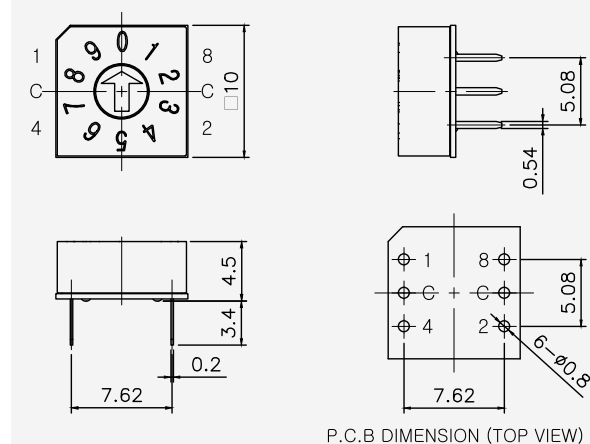

SMD Gull Wing Type Layout

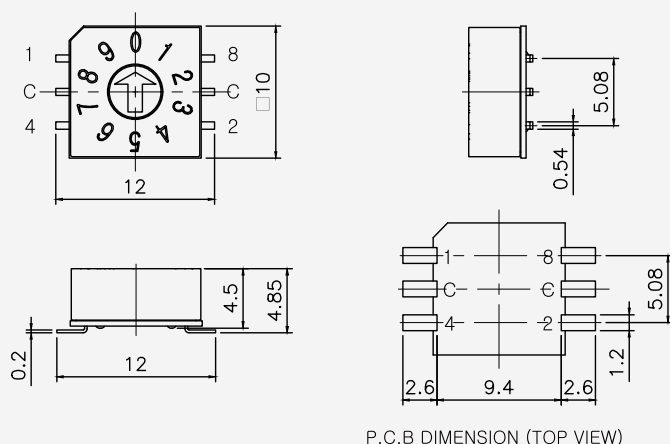

Crimped Type Layout

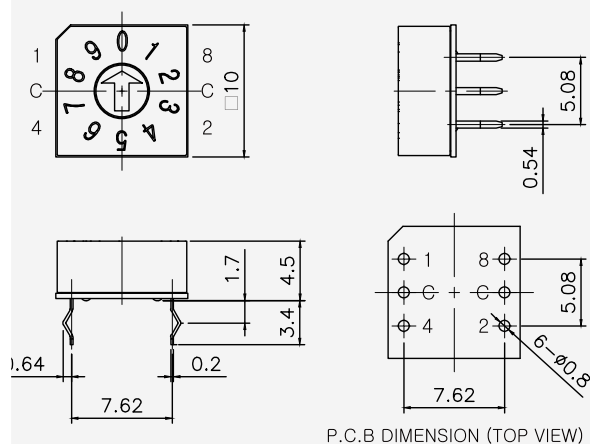

ROTARY DIP SWITCH 10x10 Size, Height: 4.5mm, 3x3 Terminal

HOW TO ORDER

U

Cover Type

U Square (Ter' 3x3)
Position of Number
0 = 0°
UA Square (Ter' 3x3)
Position of
Number 0 = -90°

D

Actuator

D Arrow (Height = 0mm)
E Cross (Height = 0mm)
M Slotted spindle
(Height = 3.2mm)
S Slotted spindle
(Height = 7.3mm)

R

Code

R Real Code
C Complement Code
G Gray Code
*Other special codes
are available
upon the request.

10

Position

04 4 Position
06 6 Position
08 8 Position
10 10 Position
16 16 Position

S

Terminal


- Through-Hole (Ter' 3x3)
S SMD Gull Wing (Ter' 3x3)
K Crimped

TR


Packing

- Tube Packing
TR Reel Packing


1. Cover Type



U Type




UA Type




2. Actuator


D Arrow (Height = 0mm)

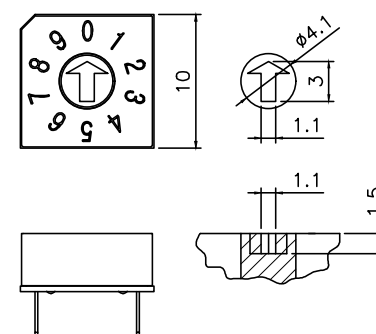


E Cross (Height = 0mm)

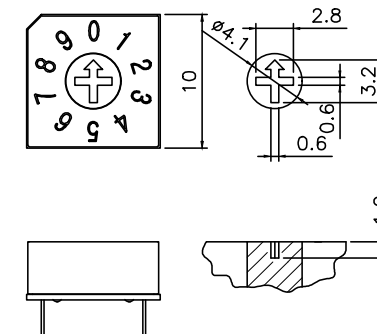

M Slotted Spindle Height = 3.2mm

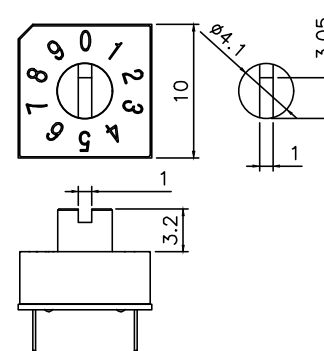

S Slotted spindle (Height = 7.3mm)

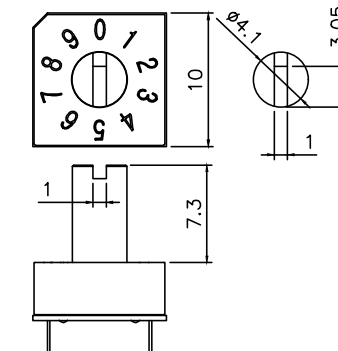

ROTARY DIP SWITCH 10x10 Size, Height: 4.5mm, 3x3 Terminal

3. Code & Position

R

Real Code

2

C

C

1

04 POSITION

1

C

C

4

2

06/08/10/16 POSITION

C

Complement Code

2

C

C

1

04 POSITION

1

C

C

4

2

06/08/10/16 POSITION

G

Gray Code

1

C

C

4

2

10/16 POSITION

1

C

C

4

2

16 POSITION

* See page 30 for special codes.

4. Terminal

I	Through-Hole (Ter' 3x3)	S	SMD Type (Ter' 3x3)
P.C.B DIMENSION (TOP VIEW)		P.C.B DIMENSION (TOP VIEW)	
K	Crimped (Ter' 3x3)		
P.C.B DIMENSION (TOP VIEW)			

5. Packing

T	Tube Packing (Q'ty: 50Pcs/Tube)	TR	Tape Reel Packing
	Through-Hole Type		
	SMD Type		
	S, M Type Actuator (Height : S7.3mm, M3.2mm)		
	Through-Hole Type & Crimped Type		

Apply to only SMD types
(See Page 31)

ROTARY DIP SWITCH 10x10 Size, Height: 4.5mm, 4x1 Terminal

NEW

H
HA
Series




General Specification

- Rating :** 25mA, 12V DC (Switching)
25mA, 24V DC (None-Switching)
- Contact Resistance :** 100mΩ Max.
- Insulation Resistance :** 100MΩ Min at DC 250V
- Operating Force :** 700gf Max.
- Life Cycle :** 10,000 steps
- Sealing :** IP67 (Dust & Water proof)


GENERAL DIMENSION

Through Hole Type Layout

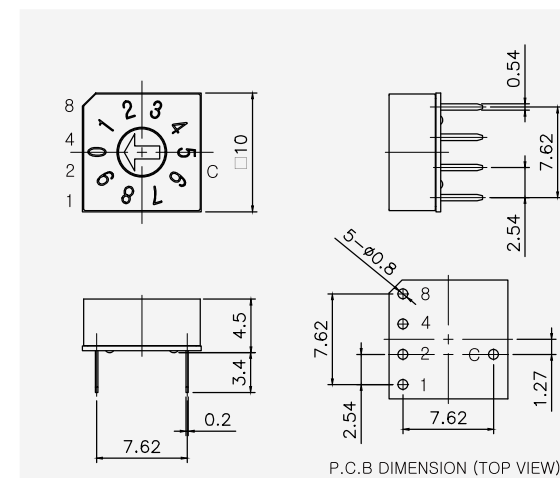


P.C.B DIMENSION (TOP VIEW)

SMD Gull Wing Type Layout

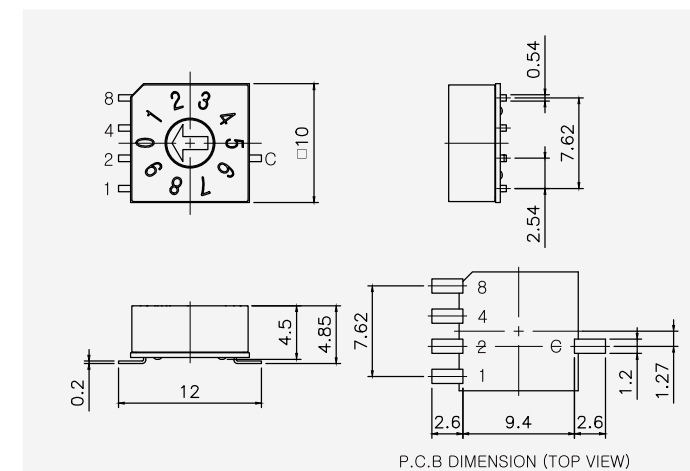

P.C.B DIMENSION (TOP VIEW)

Crimped Type Layout

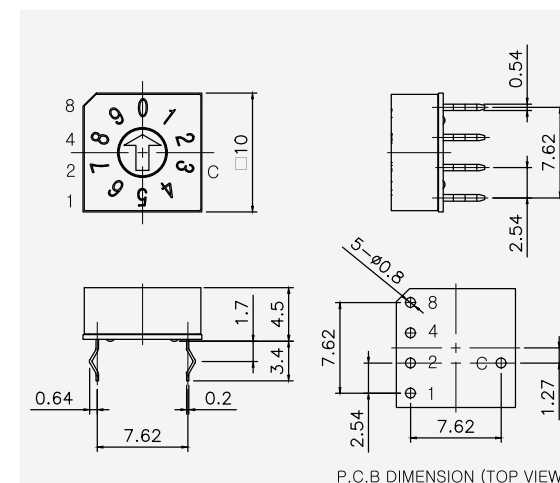

P.C.B DIMENSION (TOP VIEW)

ROTARY DIP SWITCH 10x10 Size, Height : 4.5mm, 4x1 Terminal

HOW TO ORDER

H
Cover Type

D
Actuator

R
Code

10
Position

S
Terminal

TR
Packing

H Square (Ter' 4x1)
Position of Number
0 = 0°
HA Square (Ter' 4x1)
Position of
Number 0 = -90°

D Arrow (Height = 0mm)
E Cross (Height = 0mm)
M Slotted spindle
(Height = 3.2mm)
S Slotted spindle
(Height = 7.3mm)


R Real Code
C Complement Code
G Gray Code
 *Other special codes
are available
upon the request.

04 4 Position
06 6 Position
08 8 Position
10 10 Position
16 16 Position


- Through-Hole (Ter' 4x1)
S SMD Gull Wing (Ter' 4x1)
K Crimped

- Tube Packing
TR Reel Packing


1. Cover Type



H Type







HA Type







2. Actuator




D Arrow (Height = 0mm)






E Cross (Height = 0mm)



M Slotted Spindle (Height = 3.2mm)



S Slotted spindle (Height = 7.3mm)



ROTARY DIP SWITCH 10x10 Size, Height: 4.5mm, 4x1 Terminal

3. Code & Position

R Real Code

					Real Code																	
					C	1	2	4	8													
16 Position	10 Position	08 Position	06 Position	04 Position	0	●																
					1		●	●														
					2			●		●												
					3		●				●											
					4			●														
					5		●										●					
					6			●														
					7		●	●	●													
					8			●														
					9		●														●	
					10			●														●
					11		●															
					12			●														
					13		●												●			
					14			●														
					15		●	●	●													

8


4

2

1

C


04/06/08/10/16
POSITION



04/06/08/10/16 POSITION

C Complement Code

16 Position	10 Position	08 Position	06 Position	04 Position	Complement Code																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
					C	1	2	4	8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							



04/06/08/10/16 POSITION

S Decimal Code


04 POSITION

04 POSITION

* Special Codes are available upon the request.


4. Terminal

- Through-Hole (Ter' 4x1)

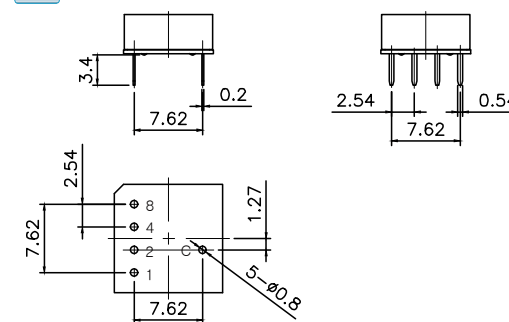


P.C.B DIMENSION (TOP VIEW)

S SMD Type (Ter' 4x1)

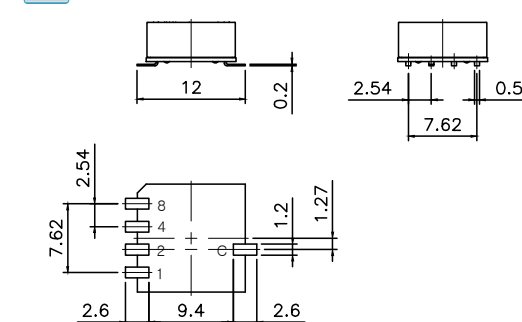

P.C.B DIMENSION (TOP VIEW)


K Crimped (Ter' 4x1)

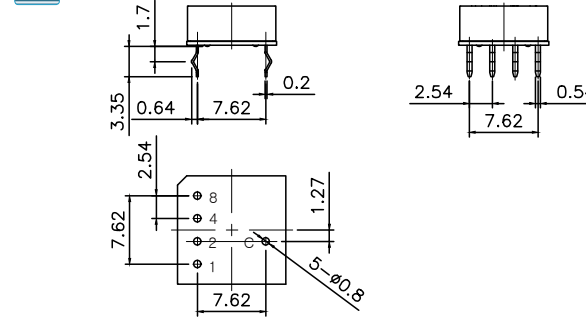


P.C.B DIMENSION (TOP VIEW)

5. Packing


- Tube Packing (Q'ty: 50Pcs/Tube)



Through-Hole Type



SMD Type



S, M Type Actuator (Height : S7.3mm, M3.2mm)
Through-Hole Type & Crimped Type

TR Tape Reel Packing

Apply to only SMD types
(See Page 31)

ROTARY DIP SWITCH 10x10 Size, Height: 6.5 & 4.5mm, 3x3 Terminal

Special Codes

* Other special codes are available upon the request.

A

10 Position

Real Code

C	1	2	4	8
0				0
1				1
2				2
3				3
4				4
5				5
6				6
7				7
8				8
9				9

4 1

C 2

8 2

10 POSITION

B

16 Position

Complement Code

C	1	2	4	8
0				0
1				1
2				2
3				3
4				4
5				5
6				6
7				7
8				8
9				9
10				A
11				B
12				C
13				D
14				E
15				F

8 2

C 4

4 1

16 POSITION

D

04 Position

Decimal Code

C	1	2	3	4
0				
1				
2				
3				

1 2

C C

4 3

04 POSITION

E

06 Position

Real Code

C	1	2	4	8
0				
1				
2				
3				
4				
5				

1 2

C C

4 4

06 POSITION

F	04 Position Real Code <table><tr><th></th><th>C</th><th>1</th><th>2</th></tr><tr><td>0</td><td>●</td><td>●</td><td></td></tr><tr><td>1</td><td>●</td><td></td><td>●</td></tr><tr><td>2</td><td>●</td><td>●</td><td>●</td></tr><tr><td>3</td><td>●</td><td></td><td></td></tr></table> 1 C C 2 04 POSITION		C	1	2	0	●	●		1	●		●	2	●	●	●	3	●			H	16 Position Complement Code <table><tr><th></th><th>C</th><th>1</th><th>2</th><th>4</th><th>8</th></tr><tr><td>0</td><td>●</td><td>●</td><td>●</td><td>●</td><td>0</td></tr><tr><td>1</td><td>●</td><td>●</td><td>●</td><td>●</td><td>1</td></tr><tr><td>2</td><td>●</td><td>●</td><td>●</td><td>●</td><td>2</td></tr><tr><td>3</td><td>●</td><td>●</td><td>●</td><td>●</td><td>3</td></tr><tr><td>4</td><td>●</td><td>●</td><td>●</td><td>●</td><td>4</td></tr><tr><td>5</td><td>●</td><td>●</td><td>●</td><td>●</td><td>5</td></tr><tr><td>6</td><td>●</td><td>●</td><td>●</td><td>●</td><td>6</td></tr><tr><td>7</td><td>●</td><td>●</td><td>●</td><td>●</td><td>7</td></tr><tr><td>8</td><td>●</td><td>●</td><td>●</td><td>●</td><td>8</td></tr><tr><td>9</td><td>●</td><td>●</td><td>●</td><td>●</td><td>9</td></tr><tr><td>10</td><td>●</td><td>●</td><td>●</td><td>●</td><td>A</td></tr><tr><td>11</td><td>●</td><td>●</td><td>●</td><td>●</td><td>B</td></tr><tr><td>12</td><td>●</td><td>●</td><td>●</td><td>●</td><td>C</td></tr><tr><td>13</td><td>●</td><td>●</td><td>●</td><td>●</td><td>D</td></tr><tr><td>14</td><td>●</td><td>●</td><td>●</td><td>●</td><td>E</td></tr><tr><td>15</td><td>●</td><td>●</td><td>●</td><td>●</td><td>F</td></tr></table> 4 1 C 2 8 2 16 POSITION		C	1	2	4	8	0	●	●	●	●	0	1	●	●	●	●	1	2	●	●	●	●	2	3	●	●	●	●	3	4	●	●	●	●	4	5	●	●	●	●	5	6	●	●	●	●	6	7	●	●	●	●	7	8	●	●	●	●	8	9	●	●	●	●	9	10	●	●	●	●	A	11	●	●	●	●	B	12	●	●	●	●	C	13	●	●	●	●	D	14	●	●	●	●	E	15	●	●	●	●	F	I	04 Position Real Code <table><tr><th></th><th>C</th><th>1</th><th>2</th></tr><tr><td>0</td><td>●</td><td></td><td></td></tr><tr><td>1</td><td>●</td><td>●</td><td></td></tr><tr><td>2</td><td>●</td><td></td><td>●</td></tr><tr><td>3</td><td>●</td><td>●</td><td>●</td></tr></table> 2 C C 1 04 POSITION		C	1	2	0	●			1	●	●		2	●		●	3	●	●	●	J	16 Position Real Code <table><tr><th></th><th>C</th><th>1</th><th>2</th><th>4</th><th>8</th></tr><tr><td>0</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>1</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>2</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>3</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>4</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>5</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>6</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>7</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>8</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>9</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>10</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>11</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>12</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>13</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>14</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr><tr><td>15</td><td>●</td><td>●</td><td>●</td><td>●</td><td></td></tr></table> 4 1 C C 8 2 10/16 POSITION		C	1	2	4	8	0	●	●	●	●		1	●	●	●	●		2	●	●	●	●		3	●	●	●	●		4	●	●	●	●		5	●	●	●	●		6	●	●	●	●		7	●	●	●	●		8	●	●	●	●		9	●	●	●	●		10	●	●	●	●		11	●	●	●	●		12	●	●	●	●		13	●	●	●	●		14	●	●	●	●		15	●	●	●	●	
	C	1	2																																																																																																																																																																																																																																																								
0	●	●																																																																																																																																																																																																																																																									
1	●		●																																																																																																																																																																																																																																																								
2	●	●	●																																																																																																																																																																																																																																																								
3	●																																																																																																																																																																																																																																																										
	C	1	2	4	8																																																																																																																																																																																																																																																						
0	●	●	●	●	0																																																																																																																																																																																																																																																						
1	●	●	●	●	1																																																																																																																																																																																																																																																						
2	●	●	●	●	2																																																																																																																																																																																																																																																						
3	●	●	●	●	3																																																																																																																																																																																																																																																						
4	●	●	●	●	4																																																																																																																																																																																																																																																						
5	●	●	●	●	5																																																																																																																																																																																																																																																						
6	●	●	●	●	6																																																																																																																																																																																																																																																						
7	●	●	●	●	7																																																																																																																																																																																																																																																						
8	●	●	●	●	8																																																																																																																																																																																																																																																						
9	●	●	●	●	9																																																																																																																																																																																																																																																						
10	●	●	●	●	A																																																																																																																																																																																																																																																						
11	●	●	●	●	B																																																																																																																																																																																																																																																						
12	●	●	●	●	C																																																																																																																																																																																																																																																						
13	●	●	●	●	D																																																																																																																																																																																																																																																						
14	●	●	●	●	E																																																																																																																																																																																																																																																						
15	●	●	●	●	F																																																																																																																																																																																																																																																						
	C	1	2																																																																																																																																																																																																																																																								
0	●																																																																																																																																																																																																																																																										
1	●	●																																																																																																																																																																																																																																																									
2	●		●																																																																																																																																																																																																																																																								
3	●	●	●																																																																																																																																																																																																																																																								
	C	1	2	4	8																																																																																																																																																																																																																																																						
0	●	●	●	●																																																																																																																																																																																																																																																							
1	●	●	●	●																																																																																																																																																																																																																																																							
2	●	●	●	●																																																																																																																																																																																																																																																							
3	●	●	●	●																																																																																																																																																																																																																																																							
4	●	●	●	●																																																																																																																																																																																																																																																							
5	●	●	●	●																																																																																																																																																																																																																																																							
6	●	●	●	●																																																																																																																																																																																																																																																							
7	●	●	●	●																																																																																																																																																																																																																																																							
8	●	●	●	●																																																																																																																																																																																																																																																							
9	●	●	●	●																																																																																																																																																																																																																																																							
10	●	●	●	●																																																																																																																																																																																																																																																							
11	●	●	●	●																																																																																																																																																																																																																																																							
12	●	●	●	●																																																																																																																																																																																																																																																							
13	●	●	●	●																																																																																																																																																																																																																																																							
14	●	●	●	●																																																																																																																																																																																																																																																							
15	●	●	●	●																																																																																																																																																																																																																																																							

K

04 Position

Special Code mit / with 2"C"

C	1	2	C'	1'	2'
0					0
1					1
2					2
3					3

C 2

1' C'

2' 1

04 POSITION

L

06 Position

Decimal Code

C	1	2	3	4	5
0					
1					
2					
3					
4					
5					

5 4

C 3

1 2

06 POSITION

M

04 Position

Code

C	0	1	2	3
0				
1				
2				
3				

1 2

C C

0 3

04 POSITION

N

04 Position

Code

C	1	2	3	4
1				
2				
3				
4				

1 4

C C

3 2

04 POSITION

P

10 Position

BCD Code

Intermittent Switching

	C	1	2	4	8
0	•				
1	•				
2	•		•		
3	•		•		
4	•			•	
5	•			•	
6	•		•		
7	•	•		•	
8					•
9	•	•			•

1 8

C 2

4 2

10 POSITION

Q

10 Position

Gray Complement Code

	C	1	2	4	8
0			•	•	
1	•				•
2	•			•	•
3	•	•			•
4	•				•
5					•
6	•		•		
7	•	•	•		•
8	•	•			•
9	•	•			

1 8

C 2

4 2


10 POSITION

ROTARY DIP SWITCH 10x10 Size Tape & Reel Packing

1. 'D' & 'E' Type Actuator with SMD Terminal (Ter'3x3 ,3x2)

(TDR-S)
(SDR-S)
(QDR-S)
(UDR-S)


Units(pcs)
600

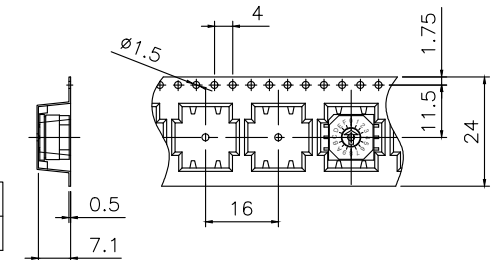

2. 'D' & 'E' Type Actuator with SMD Terminal (Ter'4x1)

(HDR-S)
(HADR-S)
(FDR-S)


Units(pcs)
600

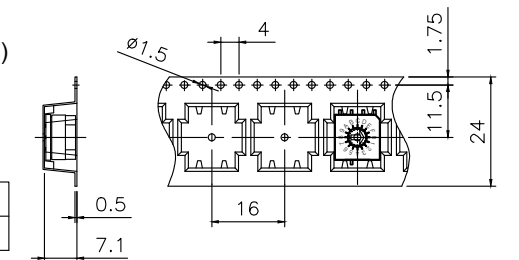

3. 'S' Type Actuator with SMD Terminal (Ter'3x3 ,3x2)

(TSR-S)
(SSR-S)
(QSR-S)


Units(pcs)
180

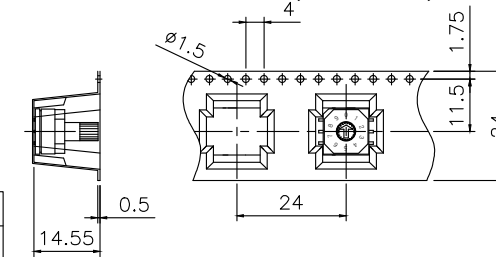

5. 'S' Type Actuator with SMD Terminal (Ter'4x1)

(ESR-S)
(FSR-S)




Units(pcs)
200

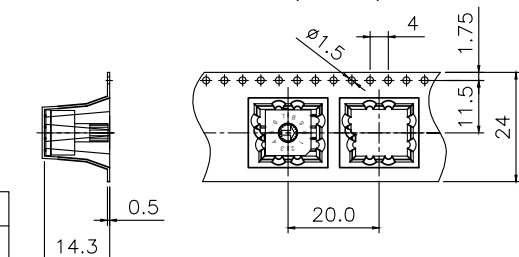

4. 'P' Type Actuator with SMD Terminal (Ter'3x3 , 3x2 , 4x1)

(TPR-S)
(SPR-S)
(FPR-S)
(QPR-S)
(EPR-S)

Units(pcs)
500

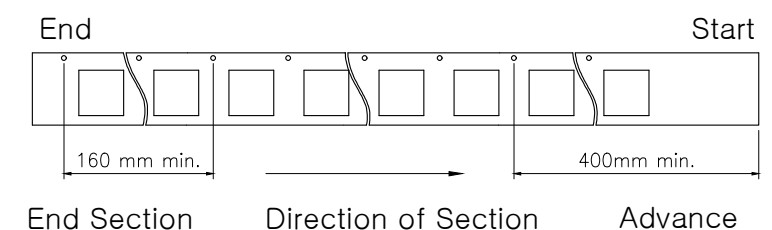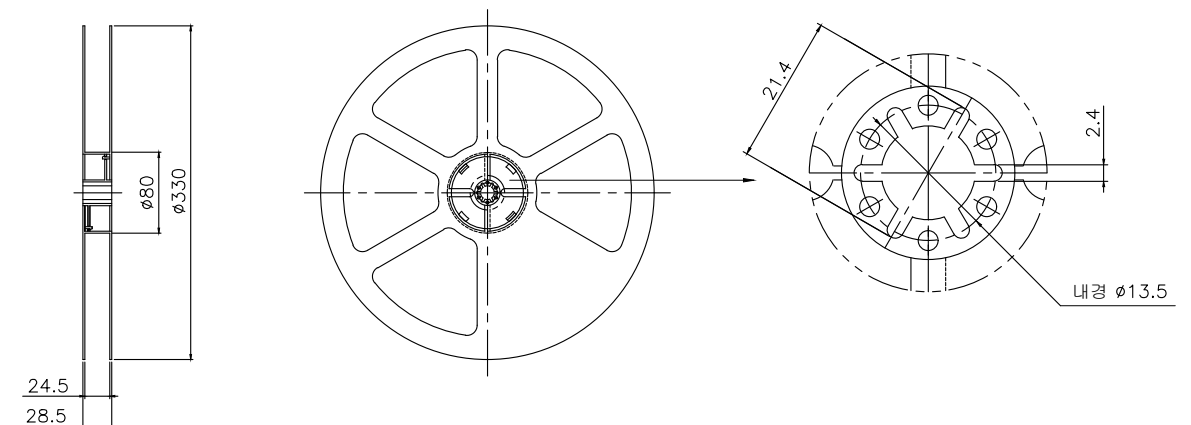
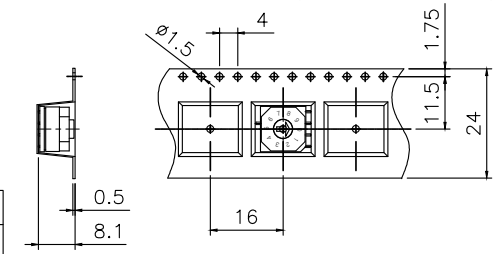


RoHS T / S / Q / F / E Series

ROTARY DIP SWITCH ACCESSORY RK Series

** Applicable to only 'E' Type Actuators / Should be mounted after soldering

1 RK-100 Series

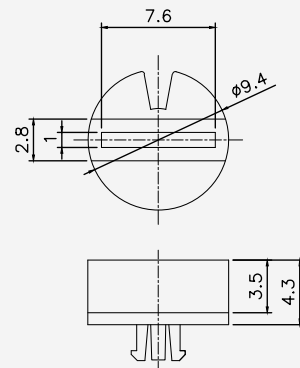


RK - 100

Color

G : Gray
R : Red
K : Black
Y : Yellow
B : Blue
GR : Green
C : Clear

2 RK-200 Series



RK - 20


Color

G : Gray
R : Red
K : Black
Y : Yellow
B : Blue
GR : Green
C : Clear

L (Length)

0 : 7.3
1 : 11.6
2 : 13.3

3 RK-300 Series

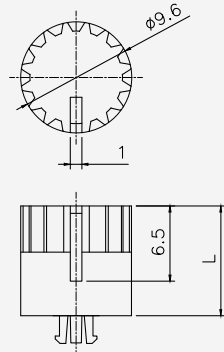

RK - 30


Color

G : Gray
R : Red
K : Black
Y : Yellow
B : Blue
GR : Green
C : Clear

L (Length)

0 : 9.5
1 : 14.5
2 : 19.0

4 RK-400 Series

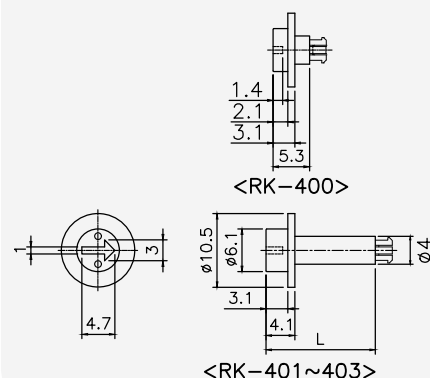

RK - 40

Color

G : Gray
R : Red
K : Black
Y : Yellow
B : Blue
GR : Green
C : Clear

L (Length)

0 : 5.3
1 : 15.7
2 : 29.1
3 : 34.4

MINI SLIDE SWITCH

CHANGE OVER TYPE (SSI Series)	34
CHANGE OVER SMD TYPE (NSI-10 Series)	35
SWITCHING TYPE (NSI-20 Series)	36

MINI SLIDE SWITCH (JUMPER SWITCH)

NEW

SSI Series



General Specification

1. Rating : DC 12V 0.5A~24V 0.3A
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : Min 10,000 MΩ at DC 500V
4. Operating Force : 250gf ±150gf
5. Travel : 1.6mm
6. Life Cycle : 2,000 cycle(with load)


BSI series has been changed to SSI series

HOW TO ORDER

SSI	Slider	10	Terminal	Body Color	Slider Color
Type	Blank - Slider 1.4mm (Standard Type) L - Slider 2.8mm	10 Change over	Blank - Straight Ter' 5mm (Standard Type) H - Right Angle Ter' 3.7mm	Blank('0') - Dark Gray (Standard Type) OR - Orange	Blank('0') - Red(Standard Type) K - Black V - Ivory Y - Yellow
SSI Through-Hole Type					


MODULAR BUILDING BLOCK

Mini Slide Switch Modules can be mounted side by side

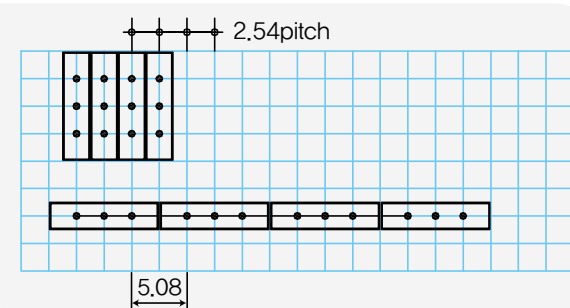


- ex) SSI-10
SLIDER COLOR : BLANK RED (STANDARD TYPE)
BODY COLOR : BLANK DARK GRAY (STANDARD TYPE)
- ex) SSI-10-OK
SLIDER COLOR : BLACK
BODY COLOR : BLANK DARK GRAY (STANDARD TYPE)
- ex) SSI-10-ORO
SLIDER COLOR : BLANK RED (STANDARD TYPE)
BODY COLOR : ORANGE
- # Number "0" instead of Blank: To distinguish slider & body colors

SSI-10 Type [Change over Through Hole]

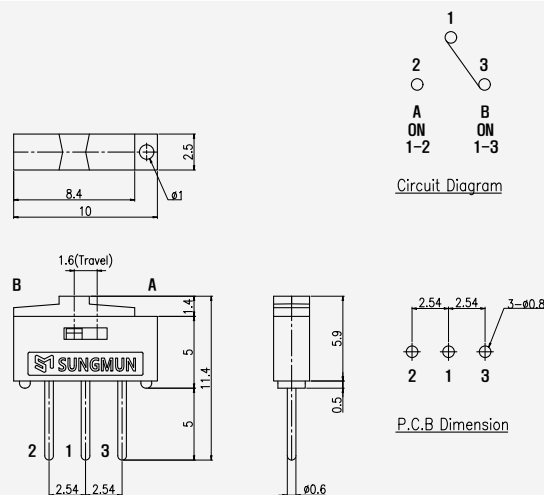

SSI-10H Type [Change over Right Angled]

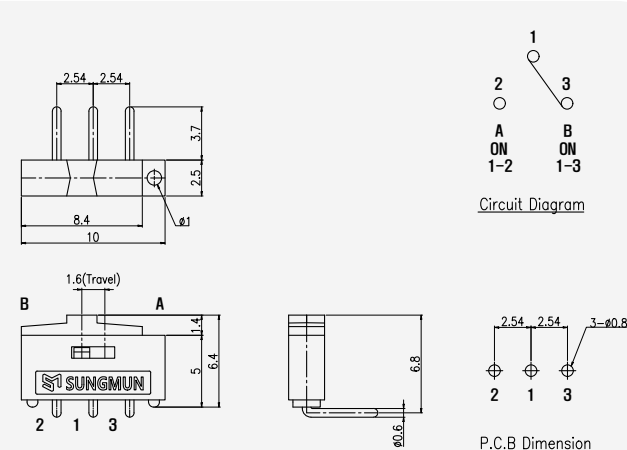

MINI SLIDE SWITCH (JUMPER SWITCH)

NEW

NSI-10 Series




General Specification

1. Rating : DC 12V 0.5A~24V 0.3A
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : Min 10,000 MΩ at DC 500V
4. Operating Force : 250gf ±150gf
5. Travel : 1.6mm
6. Life Cycle : 2,000 cycle(with load)


HOW TO ORDER

NSI	Slider	10	S	T R
Type	Blank - Slider 1.4mm (Standard Type) L - Slider 2.8mm	10 Change over	[Terminal (Body Color)] S - Straight SMD(Black) HS - Right Angle SMD(Black)	PACKING TR - Reel Packing (SMD Only)
NSI SMD Type				

NSI-10S Type [Change over SMD]

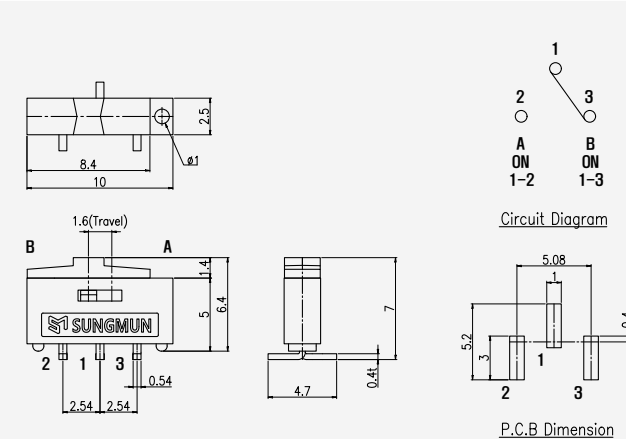

NSI-10HS Type [Change over Right Angled SMD]

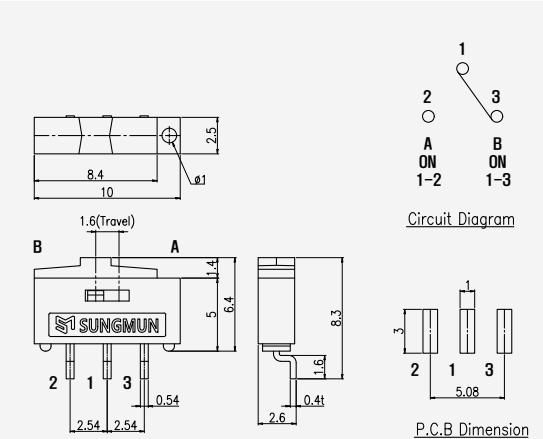

MINI SLIDE SWITCH (JUMPER SWITCH)

NEW

NSI-20 Series




General Specification

- Rating :** DC 12V 0.5A~24V 0.3A
- Contact Resistance :** 30mΩ Max.
- Insulation Resistance :** Min 10,000 MΩ at DC 500V
- Operating Force :** 250gf ±150gf
- Travel :** 1.6mm
- Life Cycle :** 2,000 cycle(with load)

MODULAR BUILDING BLOCK


Mini Slide Switch Modules can be mounted side by side

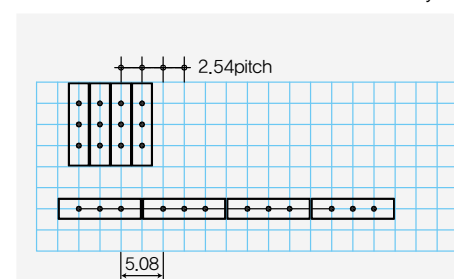


HOW TO ORDER

NSI	20	H		
Type	Circuit	Terminal		PACKING
NSI Through-Hole Type / SMD Type	20 Switching Type	[Terminal (Body Color)] Blank - Straight Ter' 5mm (Blue) H - Right Angle Ter' 3.3mm (Blue) S - Straight SMD (Black) HS - Right Angle SMD (Black)	Slider Color Blank - Red(THT)/Gray(SMD) (Standard Type)	Blank - Bulk In Plastic Bag (Standard Type) TR - Reel Packing (SMD Only)


NSI-20 Type [Switching Through Hole]

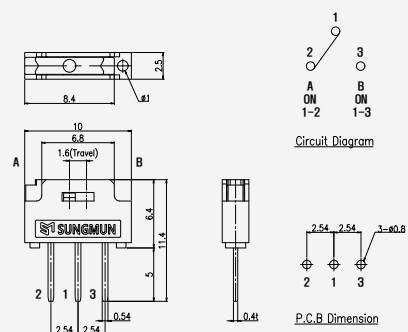


NSI-20H Type [Switching Right Angled]

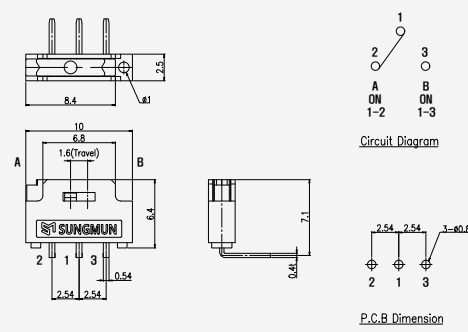

NSI-20S Type [Switching SMD]

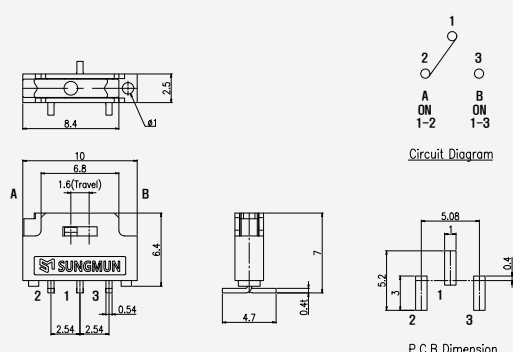

NSI-20HS Type [Switching Right Angled SMD]

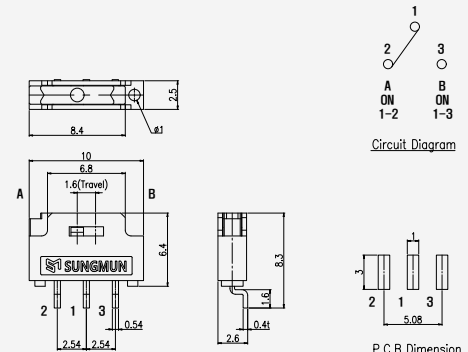


MINI SLIDE SWITCH (JUMPER SWITCH)

NSI Series & Reel Packing

1. SMD Type of Angle Terminal


- (NSI-10HS)
- (NSI-20HS)

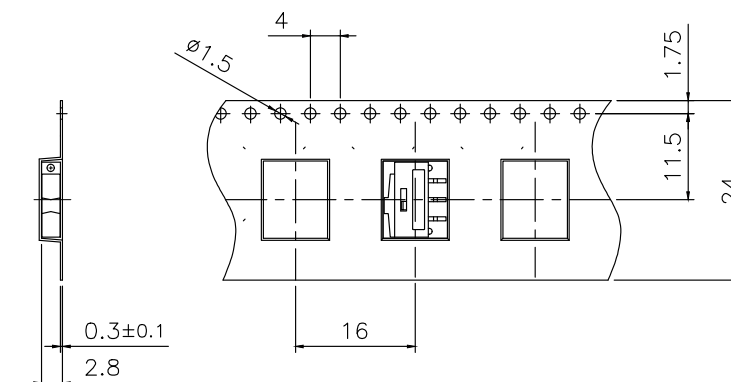




Units(pcs)
1,500


2. SMD Type of Vertical Terminal

- (NSI-10S)
- (NSI-20S)
- (NSIL-10S)

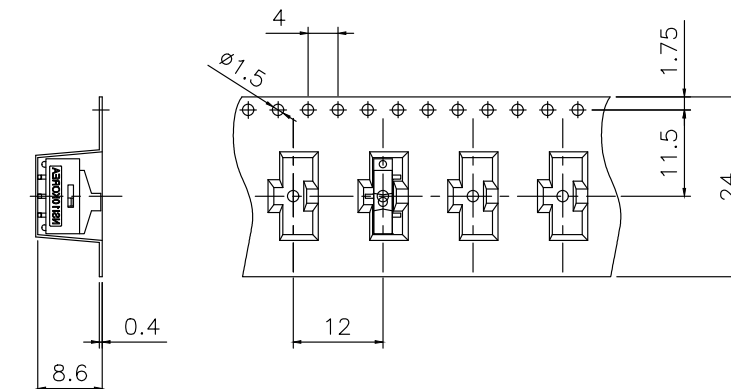

Units(pcs)
700

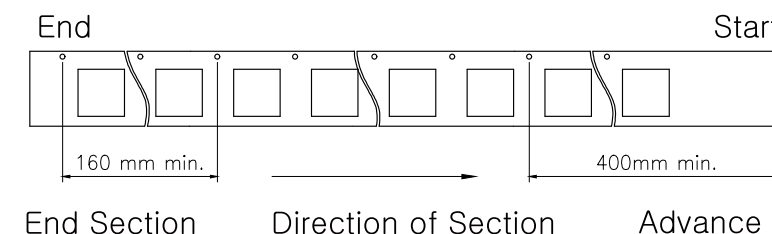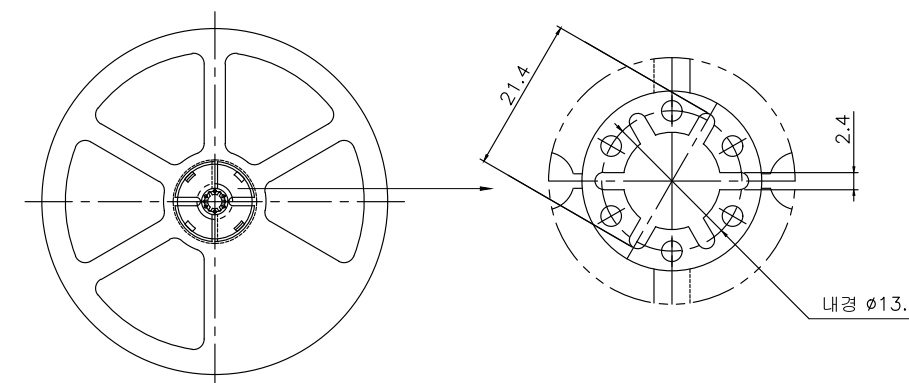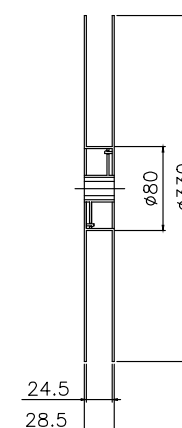

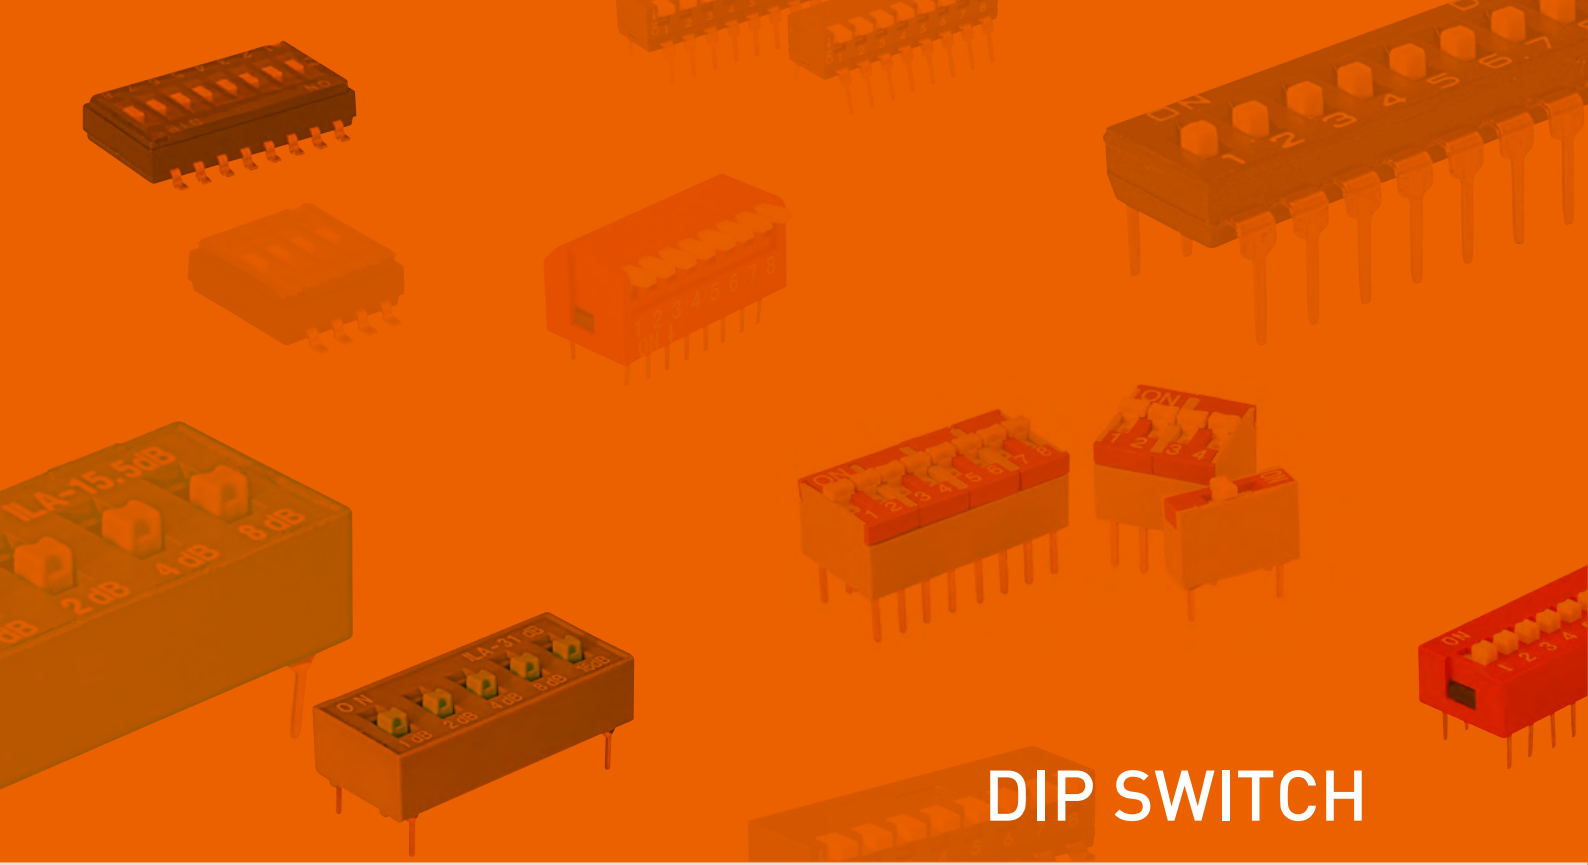

DIP SWITCH

HALF PITCH(1.27mm) DIP SWITCH (SHK Series)	39
IC TYPE DIP SWITCH (SKD/SKS Series)	40
PIANO TYPE DIP SWITCH (SKP Series)	41
BOX TYPE DIP SWITCH (BSD Series)	42
DS/DA/DP Series	43



RoHS SHK Series

MINI DIP SWITCH HALF-PITCH: 1.27mm

SHK Series



General Specification

- 1. Rating : 25mA, 24V DC
- 2. Contact Resistance : 100mΩ Max.
- 3. Insulation Resistance : Min 100 MΩ at DC 500V
- 4. Operating Force : Max 500gf
- 5. Travel : 0.8mm
- 6. Life Cycle : 1,000 cycle

HOW TO ORDER

SHK

Type

02

POLE

TR

Terminal

TR


Packing

Pole	L(mm)
02 2pole	3.67
04 4pole	6.21
06 6pole	8.75
08 8pole	11.29
10 10pole	13.83


- SMD Type

- TR Reel Package (with Tape-Sealed)
- R Reel Package (without Tape-sealed)
- Stick Package

SHK Type

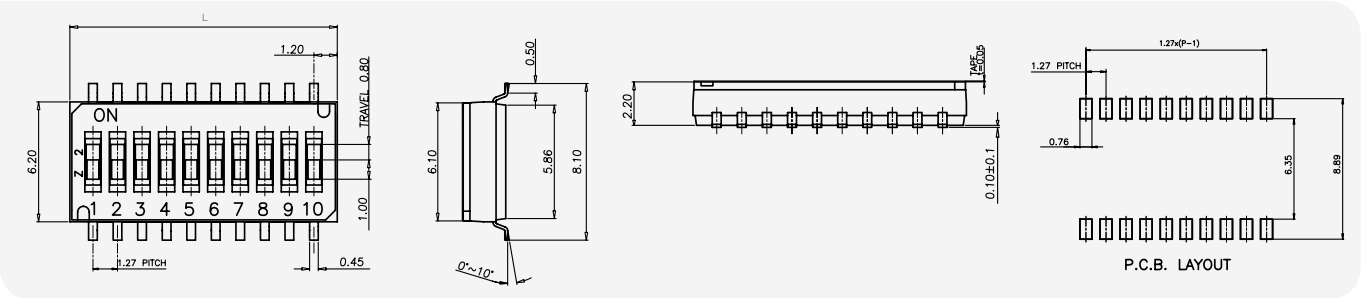

Reel Packing

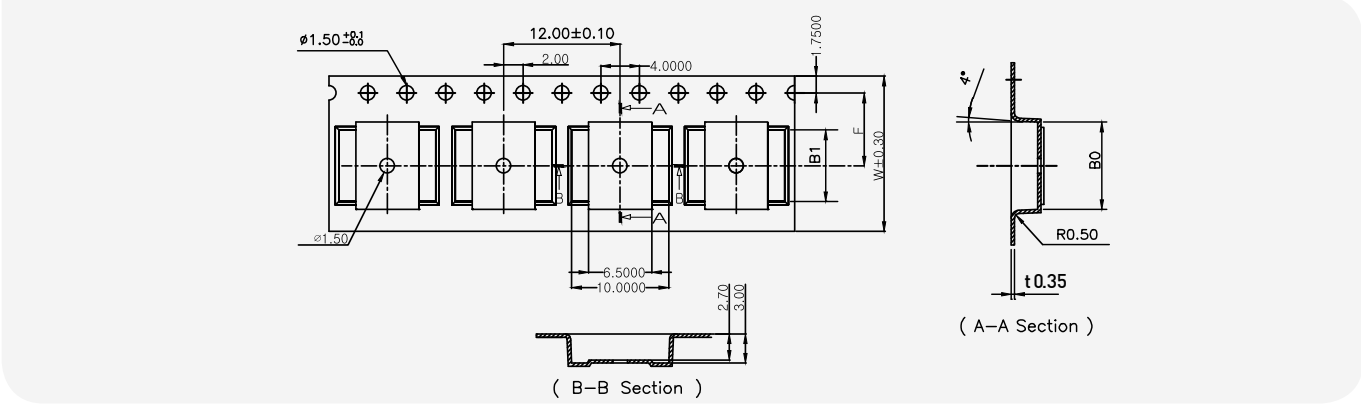

TYPE	DIM W	DIM F	DIM B0	DIM B1
SHK-10	24.00±0.3	11.50±0.1	14.20	12.65
SHK-08	24.00±0.3	11.50±0.1	11.65	10.10
SHK-06	16.00±0.3	7.50±0.1	9.10	7.55
SHK-04	16.00±0.3	7.50±0.1	6.55	5.00
SHK-02	16.00±0.3	7.50±0.1	4.00	2.45

ROTARY DIP

SLIDE SW

DIP S/W - SHK


PUSH SW

TACT SW

LED MODULE

DIP SWITCH

IC TYPE

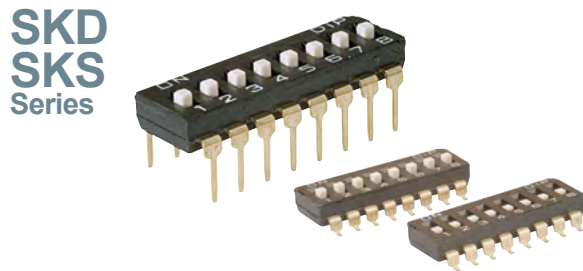

General Specification

1. Rating :

2. Contact Resistance :

3. Insulation Resistance :

4. Operating Force :

5. Travel :

6. Life Cycle :
- 25mA, 24V DC

100mΩ Max.

Min 100 MΩ at DC 500V

Max 1,000gf

1.0mm

2,000 cycle

HOW TO ORDER

SKD

Type

SKD Actuators Height: 0.7mm

SKS Actuators Height: 0mm

02

Pole

01 1pole

02 2pole

03 3pole

04 4pole

05 5pole

06 6pole

07 7pole

08 8pole

09 9pole

10 10pole

12 12pole

S

Terminal

- Through-Hole Type

S SMD Type


TR

Reel Packing

- Tube Packing


TR Reel Packing

SKD/SKS Type(IC TYPE)

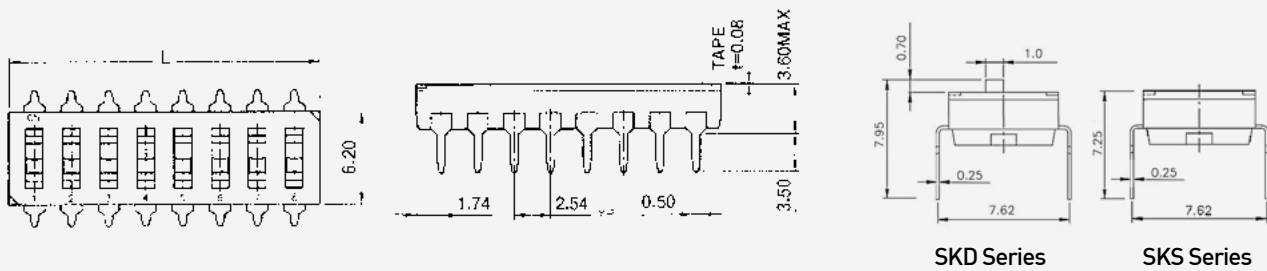

Model	SKD-01 SKS-01	SKD-02 SKS-02	SKD-03 SKS-03	SKD-04 SKS-04	SKD-05 SKS-05	SKD-06 SKS-06	SKD-07 SKS-07	SKD-08 SKS-08	SKD-09 SKS-09	SKD-10 SKS-10	SKD-11 SKS-11
Pole	1	2	3	4	5	6	7	8	9	10	12
L (mm)	3.48	6.02	8.56	11.10	13.64	16.18	18.72	21.26	23.80	26.34	31.42


SKD-S/SKS-S Type (SMD IC TYPE)

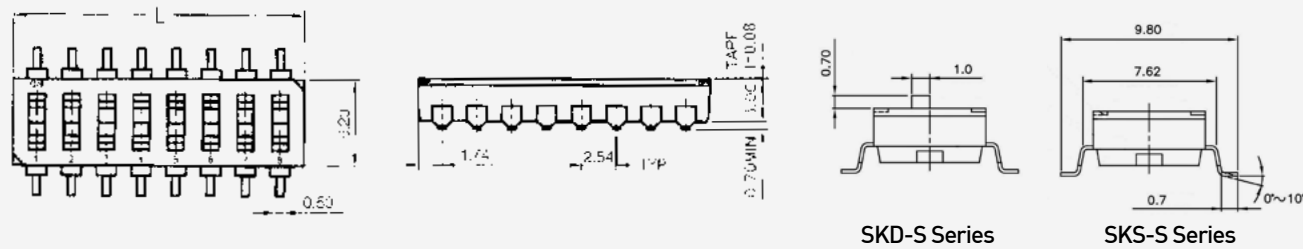

Model	SKD-01S SKS-01S	SKD-02S SKS-02S	SKD-03S SKS-03S	SKD-04S SKS-04S	SKD-05S SKS-05S	SKD-06S SKS-06S	SKD-07S SKS-07S	SKD-08S SKS-08S	SKD-09S SKS-09S	SKD-10S SKS-10S	SKD-12S SKS-12S
Pole	1	2	3	4	5	6	7	8	9	10	12
L (mm)	3.48	6.02	8.56	11.10	13.64	16.18	18.72	21.26	23.80	26.34	31.42

DIP SWITCH

PIANO TYPE PITCH: 2.54mm

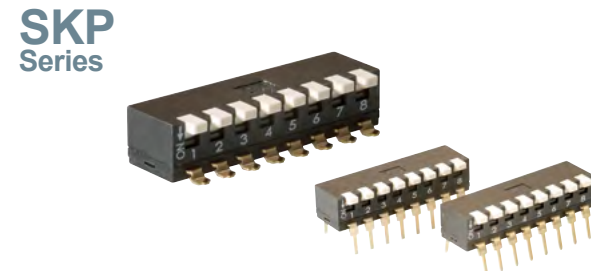

General Specification

1. Rating :

2. Contact Resistance :

3. Insulation Resistance :

4. Operating Force :

5. Travel :

6. Life Cycle :
- 25mA, 24V DC

100mΩ Max.

Min 100 MΩ at DC 500V

Max 800gf

20°

2,000 cycle

HOW TO ORDER

SKP

Type

SKP PIANO Type

02

Pole

02 2pole

04 4pole

06 6pole

08 8pole

10 10pole

S

Terminal

- Through-Hole Type

(Splay Type 9.0mm)

H Through-Hole Type(7.62mm)

S SMD Type


TR

Packing

- Tube Packing


TR Reel Packing

SKP/SKP-H TYPE(PIANO TYPE)

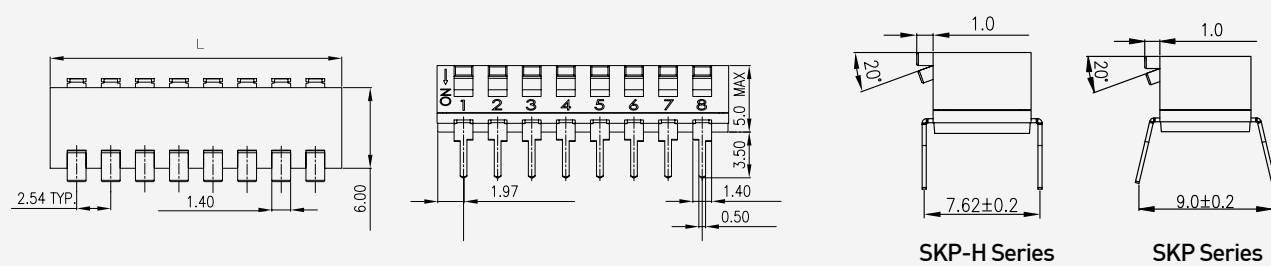

Model	SKP-02H	SKP-02	SKP-04H	SKP-04	SKP-06H	SKP-06	SKP-08H	SKP-08	SKP-10H	SKP-10
Pole	2		4		6		8		10	
L (mm)	4.98	6.48	10.06	11.56	15.14	16.64	20.22	21.72	25.30	26.80

SKP-S TYPE(PIANO TYPE)

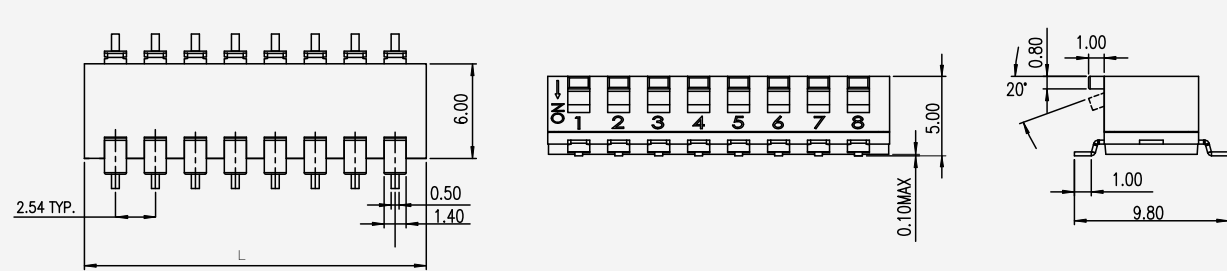


Model	SKP-02S	SKP-04S	SKP-06S	SKP-08S	SKP-10S
Pole	2	4	6	8	10
L (mm)	6.48	11.56	16.64	21.72	26.80

DIP SWITCH

BOX TYPE

BSD

Series

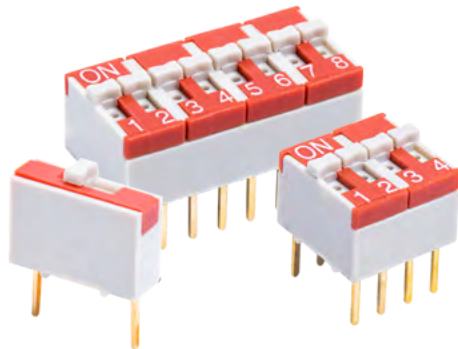

General Specification

1. **Rating :** 0.5A, 12V DC
2. **Contact Resistance :** 50mΩ Max.
3. **Insulation Resistance :** Min 500 MΩ at DC 500V
4. **Operating Force :** Max 800gf
5. **Travel :** 1.5mm
6. **Life Cycle :** 3,000 cycle

HOW TO ORDER

BSD

Type




1

01

No. of Pole

- | | | |
|----------|----------|-----------|
| 01 1pole | 05 5pole | 09 9pole |
| 02 2pole | 06 6pole | 10 10pole |
| 03 3pole | 07 7pole | |
| 04 4pole | 08 8pole | |

BSD Type

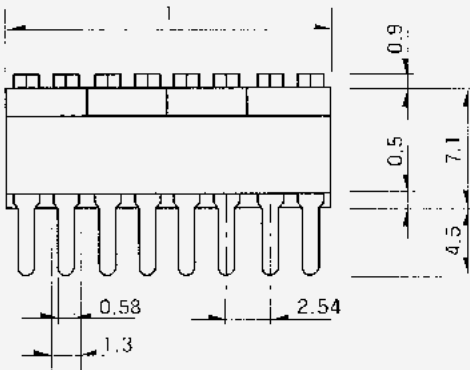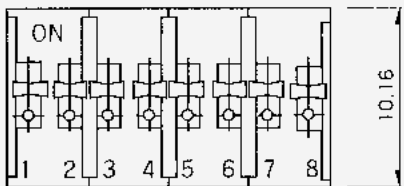

Model	BSD-101	BSD-102	BSD-103	BSD-104	BSD-105	BSD-106	BSD-107	BSD-108	BSD-109	BSD-1010
Pole	1	2	3	4	5	6	7	8	9	10
L (mm)	3.2	5.0	8.2	10.1	13.3	15.2	18.4	20.2	22.8	25.3


DIP SWITCH

DS

DA

DP

Series

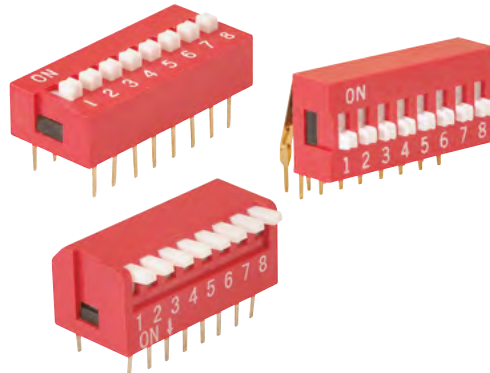

General Specification

1. **Rating :** 25mA, 24V DC
2. **Contact Resistance :** 100mΩ Max.
3. **Insulation Resistance :** Min 1,000 MΩ at DC 100V
4. **Operating Force :** Max 800gf
5. **Travel :** 2.0 mm
6. **Life Cycle :** 2,000 cycle

HOW TO ORDER

DS

Type





- DS Standard
- DA Angle
- DP Piano

02

No. of Pole





- | | | |
|--------------------|--------------------|---------------------|
| 02 2pole (L=6.64) | 06 6pole (L=16.8) | 10 10pole (L=26.92) |
| 03 3pole (L=9.18) | 07 7pole (L=19.3) | 12 12pole (L=32.04) |
| 04 4pole (L=11.72) | 08 8pole (L=21.88) | |
| 05 5pole (L=14.2) | 09 9pole (L=24.42) | |

DS Type







PCB LAYOUT

DA Type




PCB LAYOUT

DP Type



PCB LAYOUT

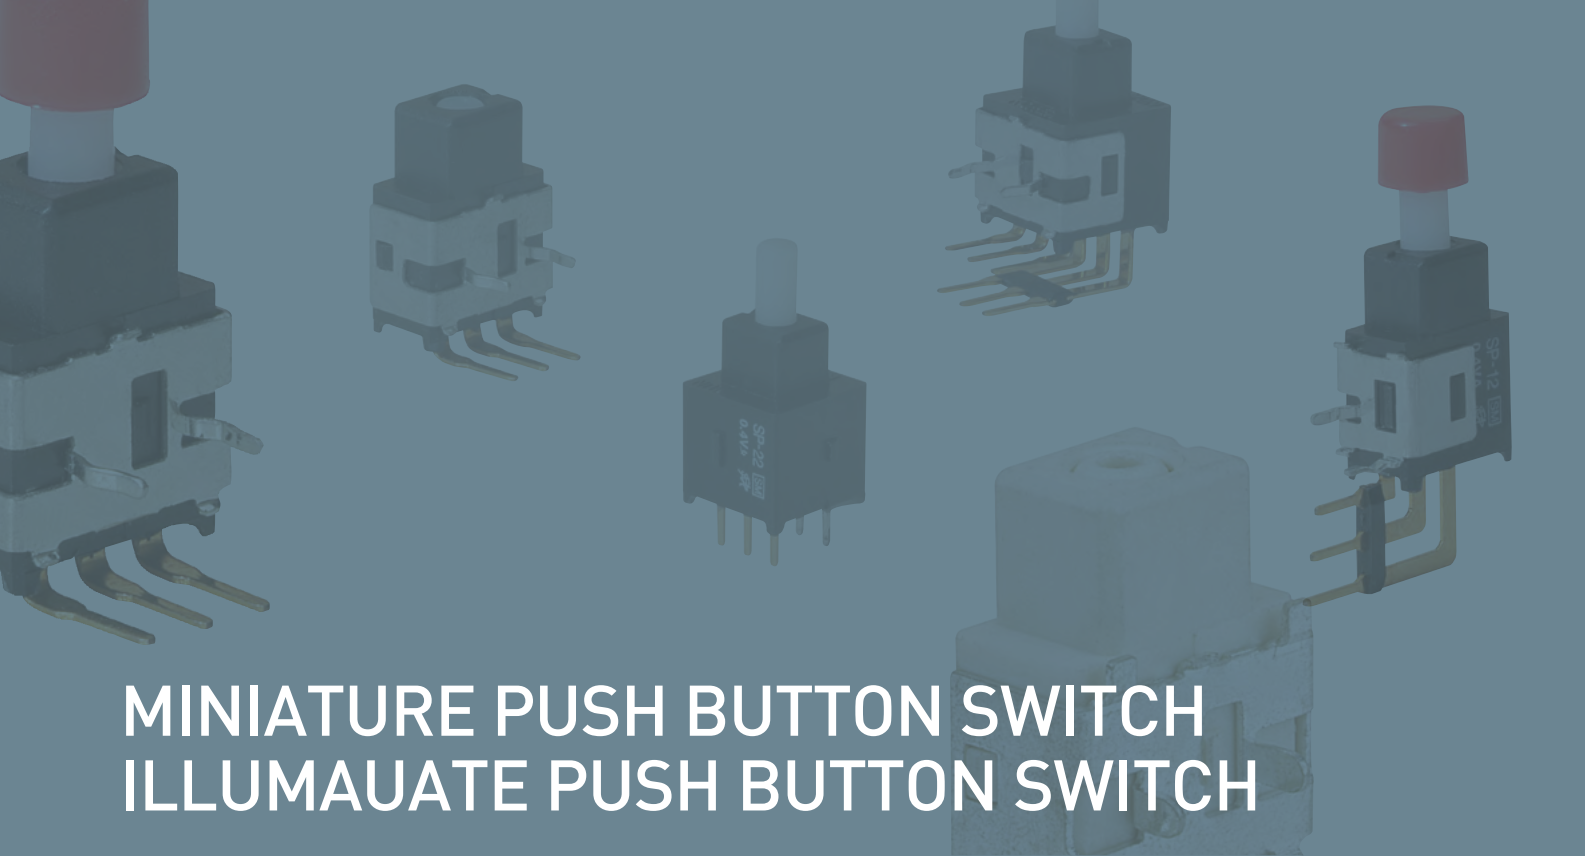

MINIATURE PUSH BUTTON SWITCH ILLUMAUATE PUSH BUTTON SWITCH

(Water Proof)
(SP Series)


SPST Series	46
SPDT Series	47
DPST Series	49
DPDT Series	49
ACCESSORY (SK Series)	50

ILLUMINATE
(SLP Series)

	52
--	----

MINIATURE PUSH BUTTON SWITCH (Water Proof)

SP Series

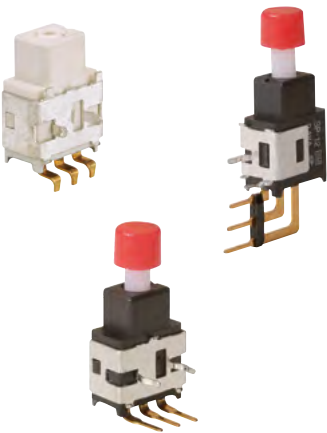

General Specification

1. Rating :

2. Contact Resistance :

3. Insulation Resistance :

4. Withstanding Voltage :

5. Operating Force :

6. Travel :
- 0.4VA at 28V AC or DC Max

50mΩ Max.

Min 500MΩ at DC 500V

1 Minute at AC 500V

250gf ±100gf(1 Pole)
350gf ±100gf(2 Pole)


1.1mm

* Non-Lock Type
* Waterproof is optional, except F type(0mm) push length.
F type is not available for waterproof.

HOW TO ORDER


SP	1	2	—	S	H	—	S	TR
Type	Poles	Circuit		Push Length	Terminal		SMD	Packing
	1 Single 2 Double	0 ON-(OFF) 1 OFF-(ON) 2 ON-(ON) *(): Momentary		F 0mm P 3.3mm S 5.4mm L 7.8mm	P Straight B Straight W/Bracket H Right Angle V Virtical W/Bracket		- Through-Hole S SMD	- Tray 100Pcs TR 500Pcs/Reel

SP-10

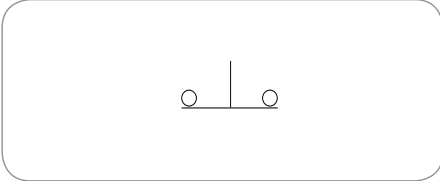


Pole	CIRCUIT	
	NORMAL	DOWN
SPST	ON	(OFF)

SP-11

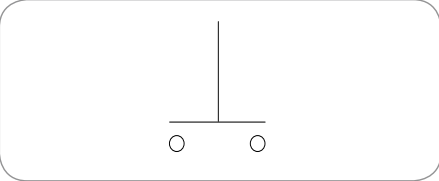


Pole	CIRCUIT	
	NORMAL	DOWN
SPST	OFF	(ON)

SP-12

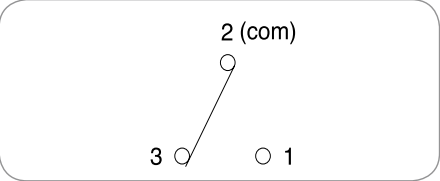


Pole	CIRCUIT	
	NORMAL	DOWN
SPDT	ON 2-3	(ON) 1-2

SP-20

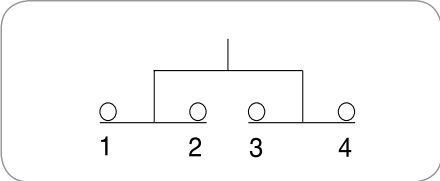


Pole	CIRCUIT	
	NORMAL	DOWN
DPST	ON 1-2 3-4	(OFF)

SP-21

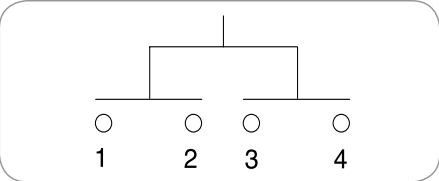

Pole	CIRCUIT	
	NORMAL	DOWN
DPST	OFF	(ON) 1-2 3-4

SP-22

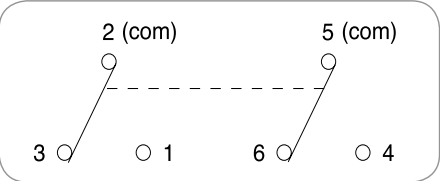


Pole	CIRCUIT	
	NORMAL	DOWN
DPDT	ON 2-3 5-6	(ON) 1-2 4-5

*(): Momentary


MINIATURE PUSH BUTTON SWITCH (Water Proof)

SPST Series


SP-11FH-S
(SMD Type)

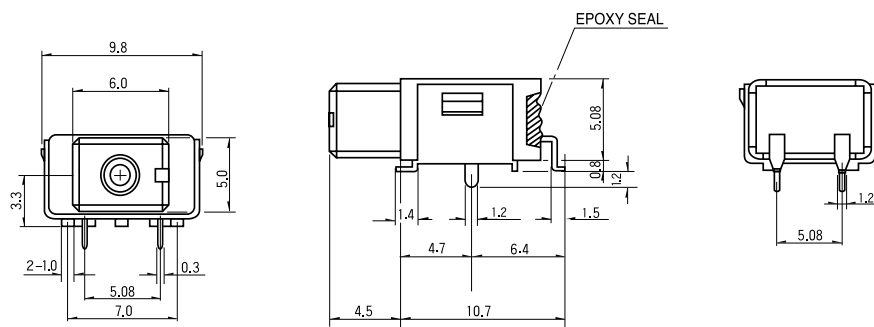


SP-11SH-S
(SMD Type)

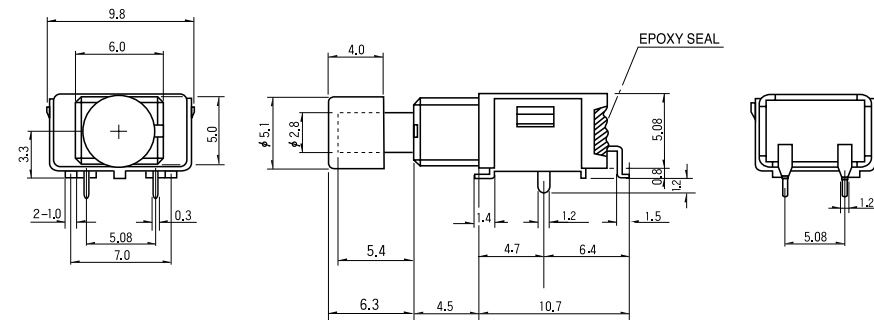

SP-11SP

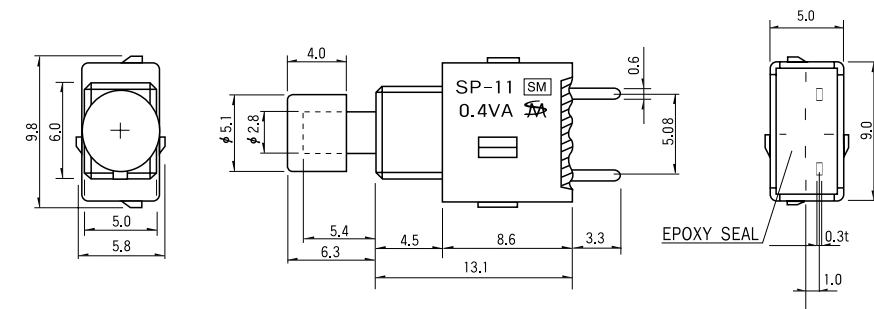


SP-11SH

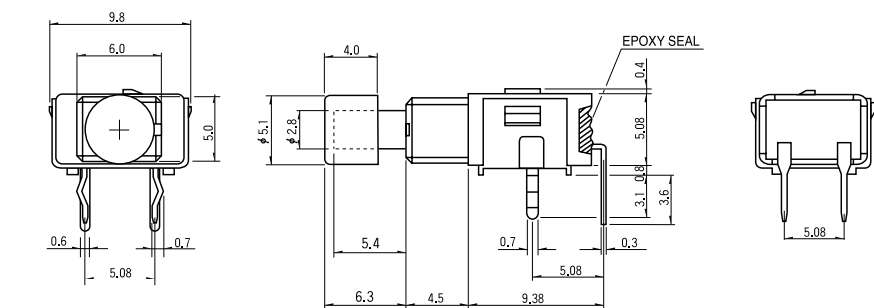


MINIATURE PUSH BUTTON SWITCH (Water Proof)

SPDT Series


SP-12FH-S
(SMD Type)

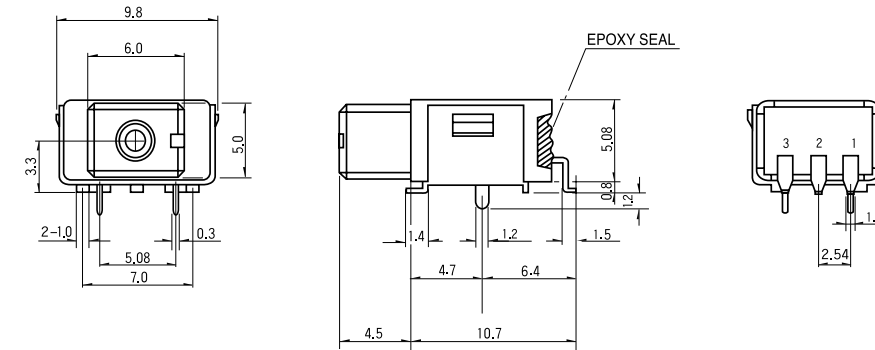


SP-12SH-S
(SMD Type)

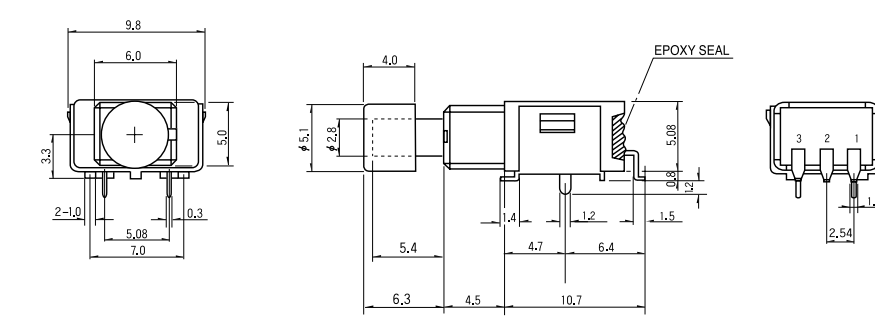

SP-12SP

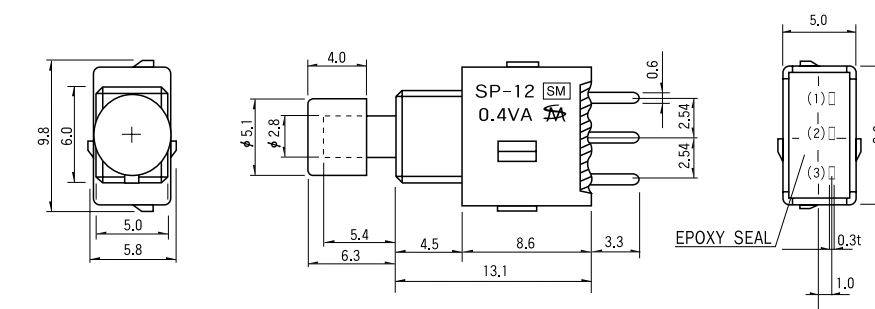


SP-12SB

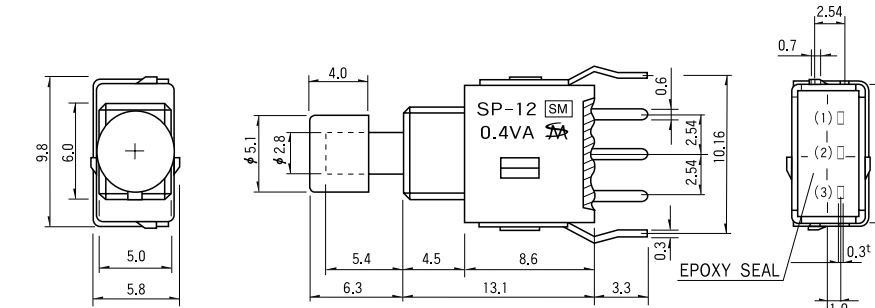


MINIATURE PUSH BUTTON SWITCH (Water Proof)

DPDT Series

SP-22PH

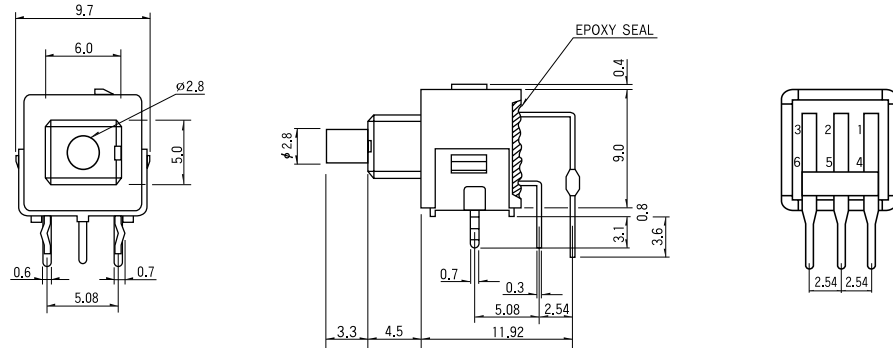

SP-22SH

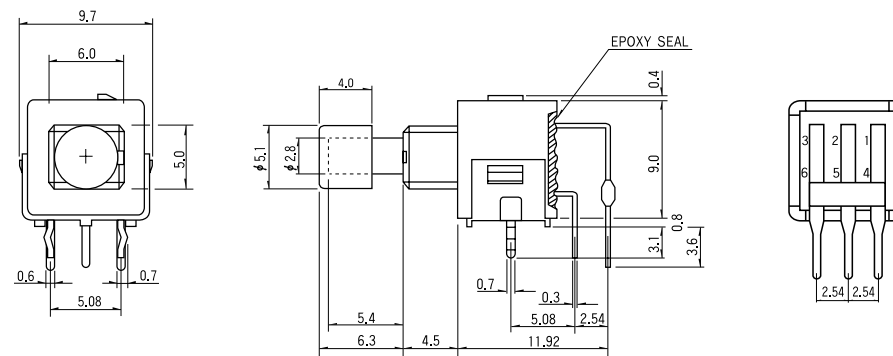

SK-100 R CAP



R : Red K : Black W : White

P.C.B DIMENSION				
	"P" TYPE	"B" TYPE	"H" TYPE	"V" TYPE
SPDT				
DPDT				



MINIATURE PUSH BUTTON SWITCH (Water Proof)

SP Series & Reel Packing

1. SMD Type of Angle Terminal

- (SP-12FH-S)
- (SP-12PH-S)
- (SP-12SH-S)

Units(pcs)
500

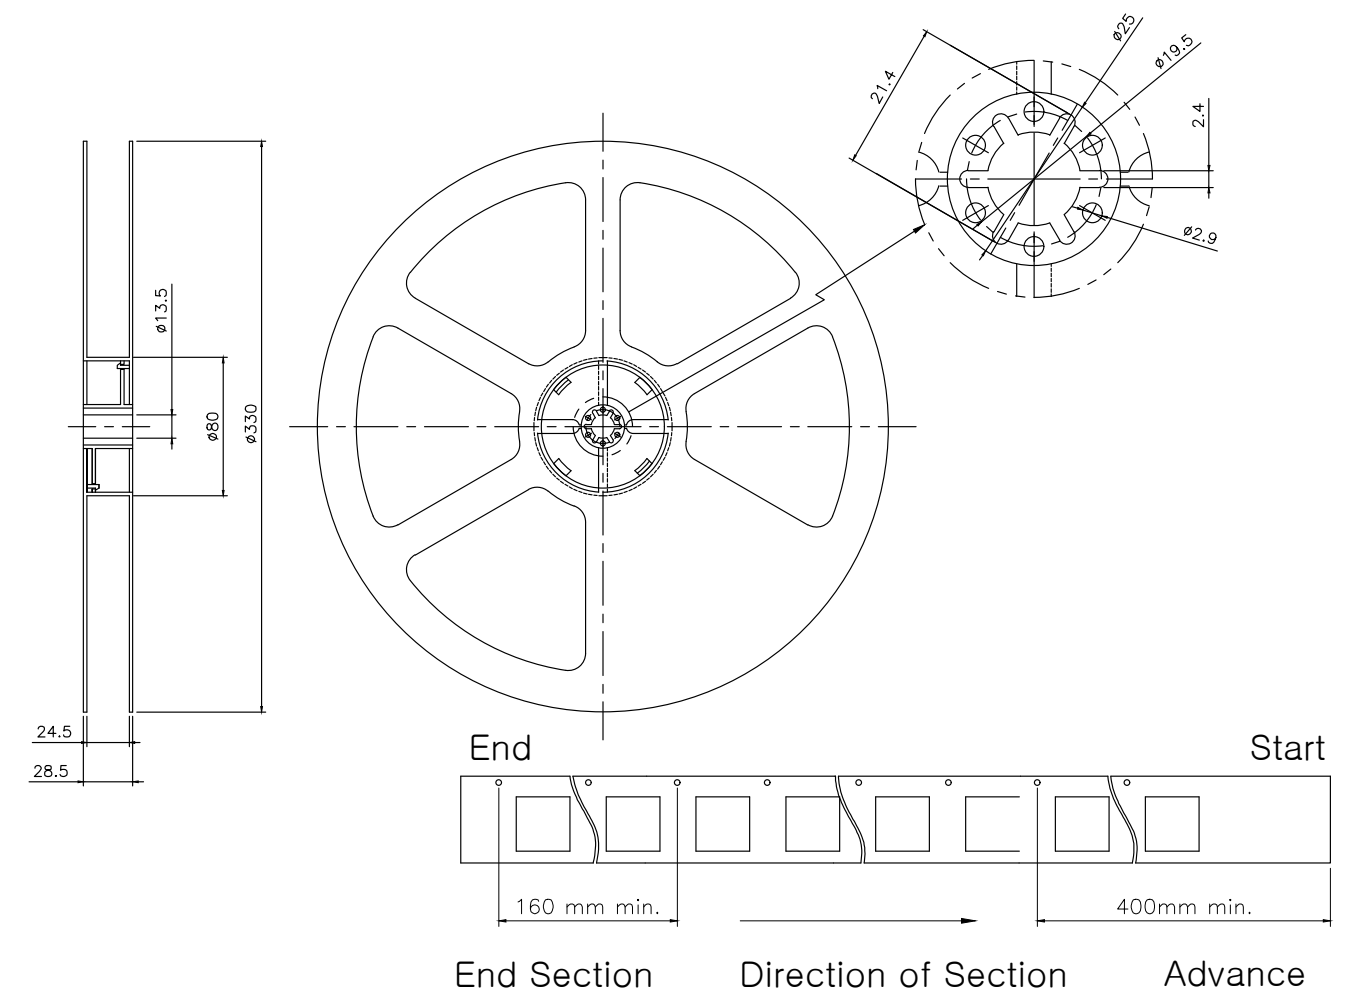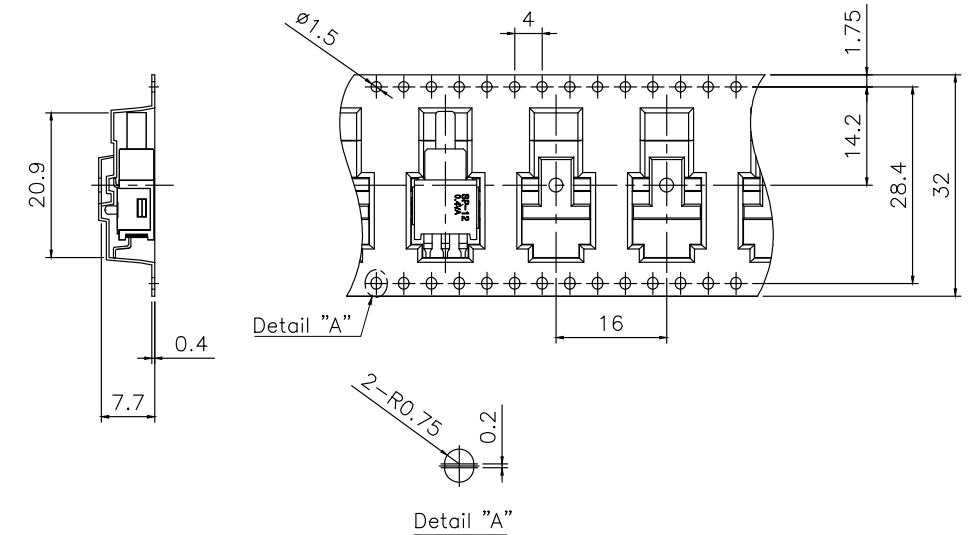

ILLUMINATE PUSH BUTTON SWITCH (SLP Series)

NEW



General Specification

1. Life Cycle :

Min 20,000 Switching Cycles
Operating Voltage 13.5V
Buld Load Max 30W.
2. Storke :


- Lock Stroke : 2.35
- Full Stroke : 3.5
3. Operationg Force :

5N±1.

HOW TO ORDER

SLP	1	5	-	01
Type	Poles	Circuit		LED
	1 Single	5 ON-ON (C-1) (C-2) 6 ON-(ON) (C-1) (C-2) *(): Momentary		- Without LED 01 Red Diffused 02 Green Diffused 03 Yellow Diffused 04 Amber 08 Blue Diffused 09 White Diffused 12 Red/Green Diffused 32 Yellow/Green Diffused

GENERAL DIMENSION


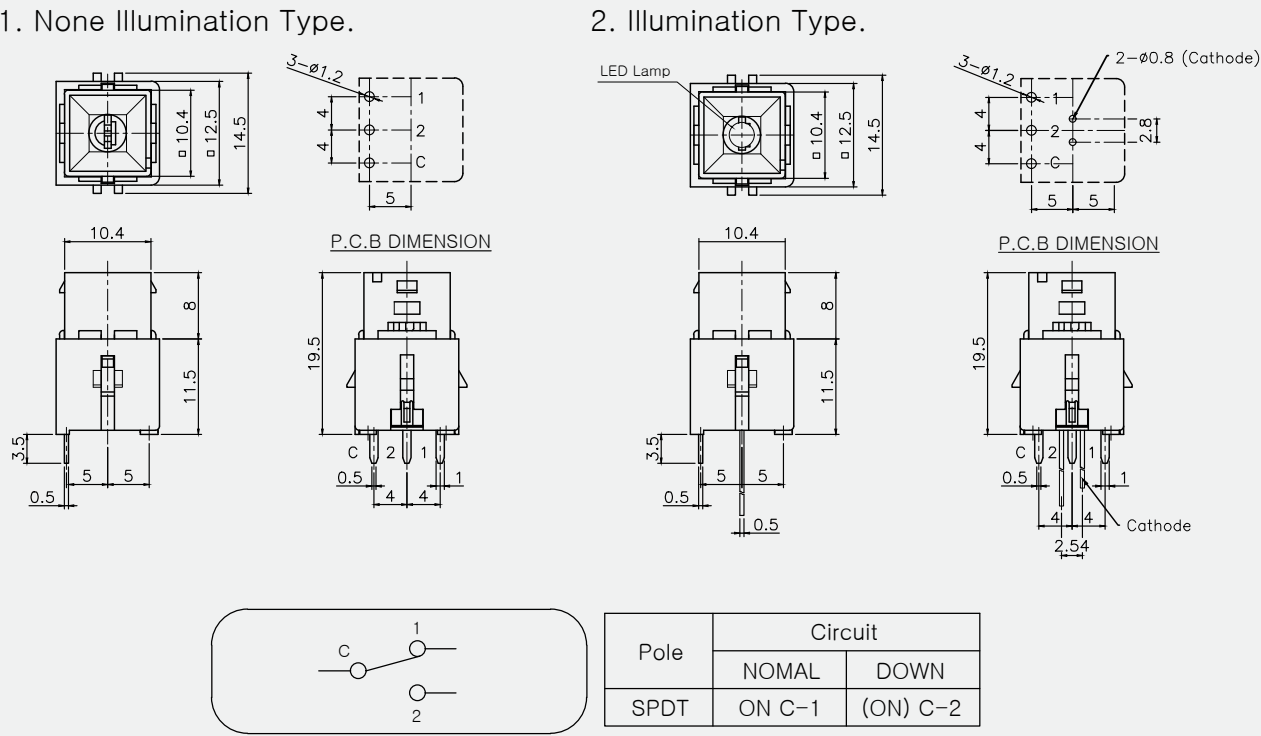


PUSH, TACT SWITCH

RUBBER TACT SWITCH	54
TACT SWITCH (DIP TYPE)	55
LED TACT SWITCH	58
TACT SWITCH (SMD TYPE)	59
HOOK SWITCH	65
PUSH SWITCH	66



RUBBER TACT SWITCH

STR-8501

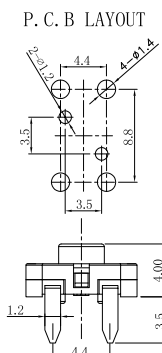



1. Rating : DC 12V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100mΩ, DC500V
4. Operating Force : 800gf Max
5. Travel : 0.8mm
6. Life Cycle : 100,000 Cycle

STR-8501S

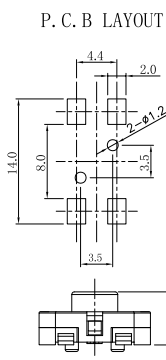



1. Rating : DC 12V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100mΩ, DC500V
4. Operating Force : 800gf Max
5. Travel : 0.8mm
6. Life Cycle : 100,000 Cycle

STR-1201

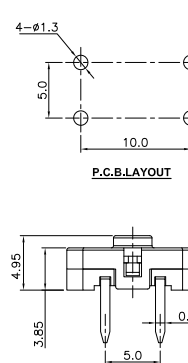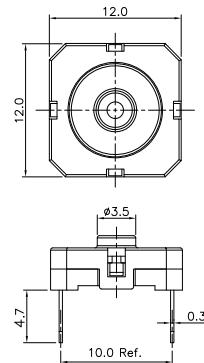

1. Rating : DC 12V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100mΩ, DC500V
4. Operating Force : 800gf Max
5. Travel : 0.8mm
6. Life Cycle : 100,000 Cycle


STR-1201S



1. Rating : DC 12V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100mΩ, DC500V
4. Operating Force : 800gf Max
5. Travel : 0.8mm
6. Life Cycle : 100,000 Cycle

TACT SWITCH(DIP TYPE)

STP-1230

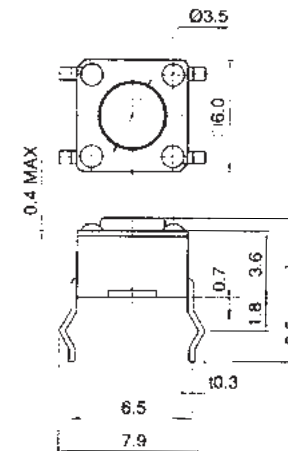


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

Model No.	Operating Force
STP-1230	160 ±50gf
STP-1230W	250±50gf

Model No.	STP 1230	STP 1230A	STP 1230B	STP 1230C	STP 1230D	STP 1230E	STP 1230F	STP 1230G	STP 1230J
L	4.3	5.0	9.5	8.0	13.0	7.3	8.5	7.0	17.0

STP-1232

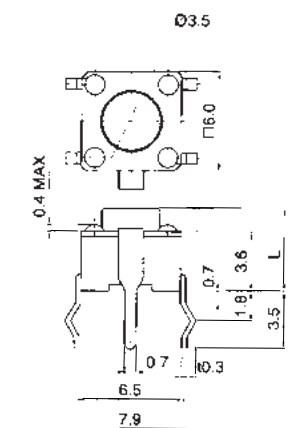


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

Model No.	Operating Force
STP-1232	160 ±50gf
STP-1232W	250±50gf

Model No.	STP 1232	STP 1232A	STP 1232B	STP 1232C	STP 1232D	STP 1232E	STP 1232F	STP 1232G	STP 1232J
L	4.3	5.0	9.5	8.0	13.0	7.3	8.5	7.0	17.0


STP-1145

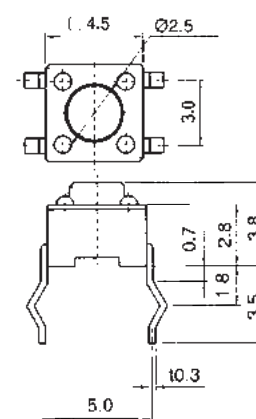


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

TACT SWITCH(DIP TYPE)

STP-1236


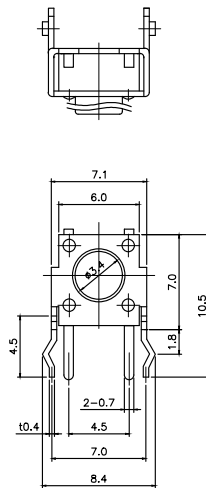


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 80,000 Cycles
5. Operating Force : 160±50gf




Model No.	STP 1236	STP 1236A	STP 1236B	STP 1236C	STP 1236D	STP 1236E	STP 1236F	STP 1236G	STP 1236J
L	3.15	3.85	8.35	6.85	11.85	6.15	7.35	5.85	15.85


STP-1236T

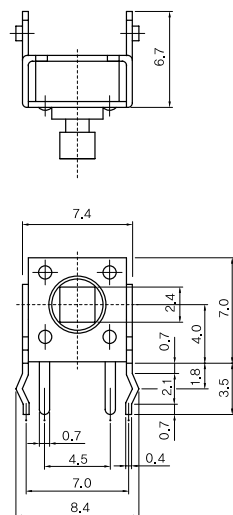


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 80,000 Cycles



STP-1117

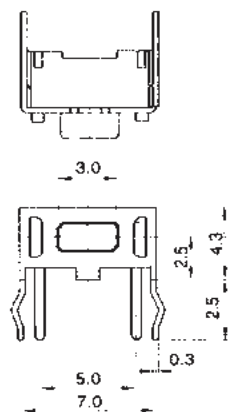


1. Rating : DC 12V, 50mA
2. Travel : 0.25± m/m
3. Operating Force : 180±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 50,000 Cycles




Model No.	Operating Force
STP 1117	180±50gf
STP 1117W	250±50gf

TACT SWITCH(DIP TYPE)

STP-1243

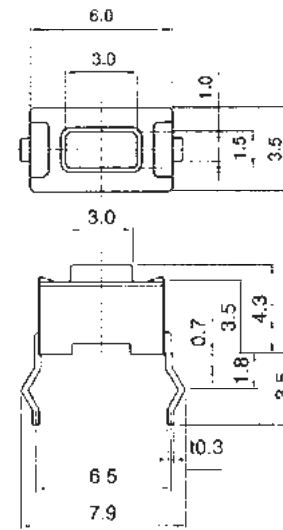


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles




Model No.	Operating Force
STP-1243	180 ±50gf
STP-1243W	250±50gf

STP-1250


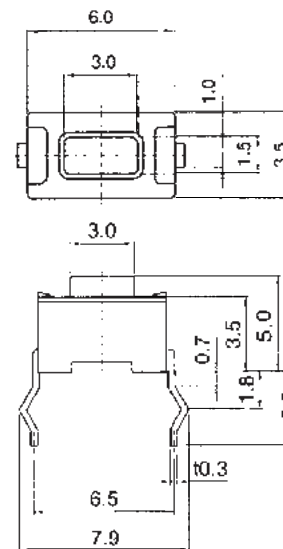


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles




Model No.	Operating Force
STP-1250	180 ±50gf
STP-1250W	250±50gf

STP-1243S STP-1250S

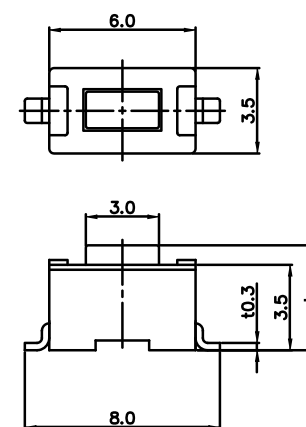

1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles




Model No.	Stem(L)	Operating Force
STP-1243S	4.3mm	180 ±50gf
STP-1250S	5.0mm	180 ±50gf
STP-1243SW	4.3mm	250±50gf
STP-1250SW	5.0mm	250±50gf

LED TACT SWITCH




STP-1194



Model No.	Color (Led)
STP 1194R	Red
STP 1194G	Green
STP 1194Y	Yellow
STP 1194B	Blue



CIRCUIT DIAGRAM




1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±30gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles
6. With Led : Option




STP-1193



Model No.	Color (Led)
STP 1193R	Red
STP 1193G	Green
STP 1193Y	Yellow
STP 1193B	Blue




CIRCUIT DIAGRAM



1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±30gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles
6. With Led : Option

STP-1193 CAP

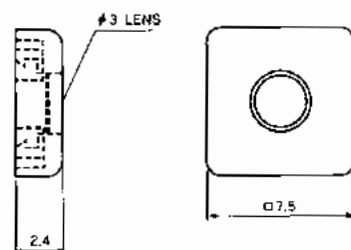




Model No.	Color
TC 1193 W	White
TC 1193 BL	Blue
TC 1193 R	Red
TC 1193 B	Black

TACT SWITCH (SMD TYPE)

STP-1126






Model No.	Operating Force
STP1126	180±50gf
STP1126S	250±50gf

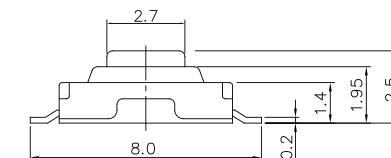

1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles

STP-1238

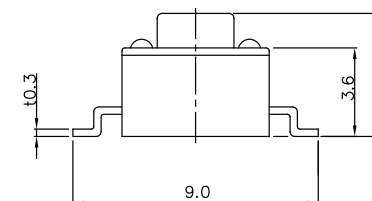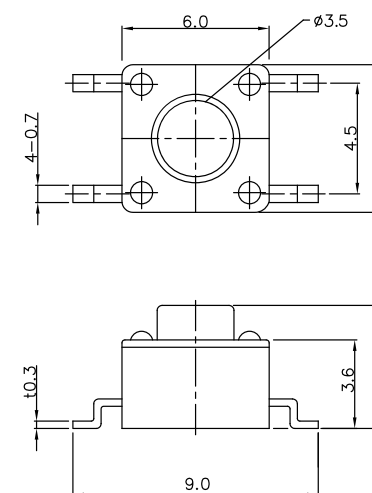




1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Contact Resistance : 100mΩ Max.
4. Operating Force : 160±50gf

Model No.	STP 1238	STP 1238A	STP 1238H	STP 1238B	STP 1238C	STP 1238D	STP 1238E	STP 1238F	STP 1238G
L	4.3	5.0	6.0	9.5	8.0	13.0	7.3	8.5	7.0

STP-1122





Model No.	Operating Force
STP 1122	160gf
STS 1122W	250gf

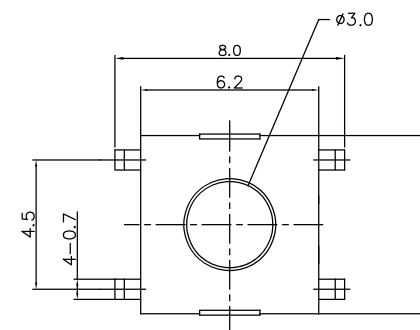

1. Rating : DC 15V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±30gf
4. Contact Resistance : 100mΩ Max.
5. Life : 80,000 Cycles

TACT SWITCH (SMD TYPE)


STP-1127

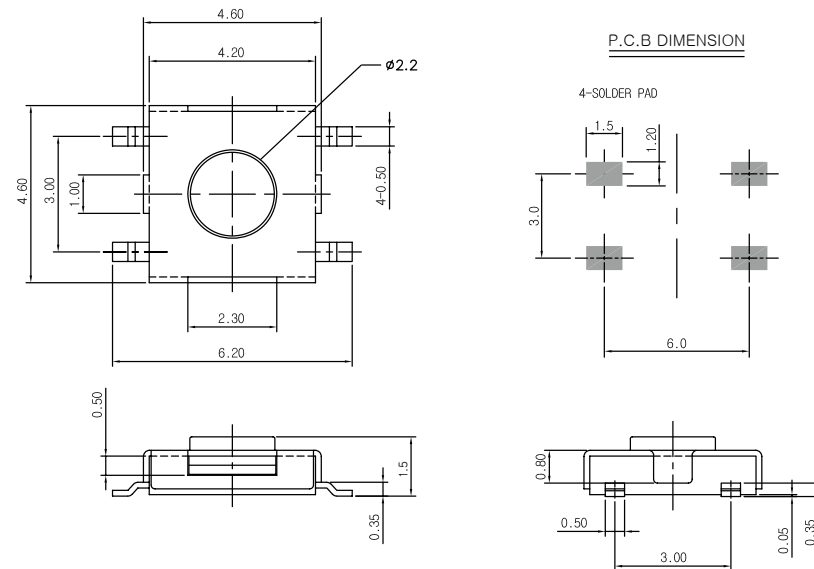

Model No.	Stem(L)
STP - 1127	1.5



1. Rating : DC 12V, 50mA
2. Travel : 0.20±0.1m/m
3. Operating Force : 250±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 cycles

STP-1125

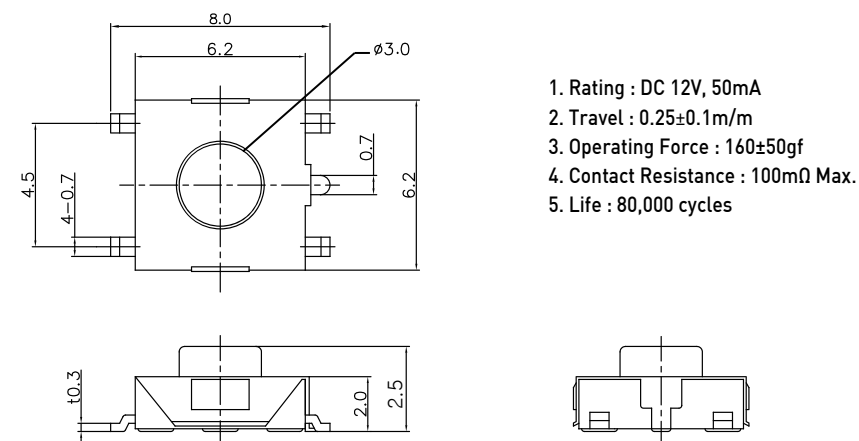

1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 80,000 cycles


STP-1125B

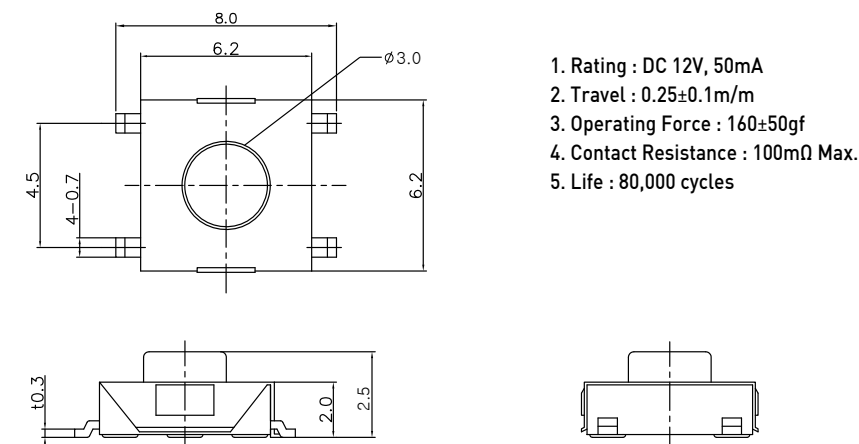

1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 80,000 cycles

TACT SWITCH (SMD TYPE)

STP-1152


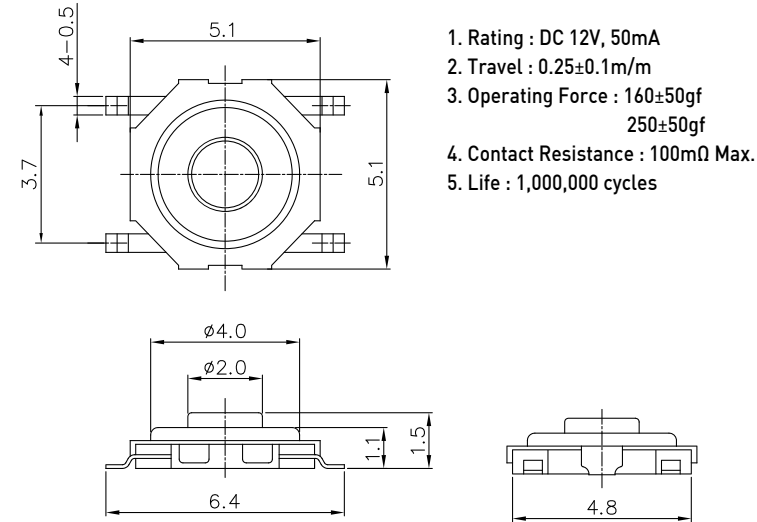


1. Rating : DC 12V, 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force : 160±50gf
250±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 1,000,000 cycles

Model No.	Stem (L)
STP - 1152	1.5
STP - 1152A	4.3


Stem : Metal, Plastic

STP-1197

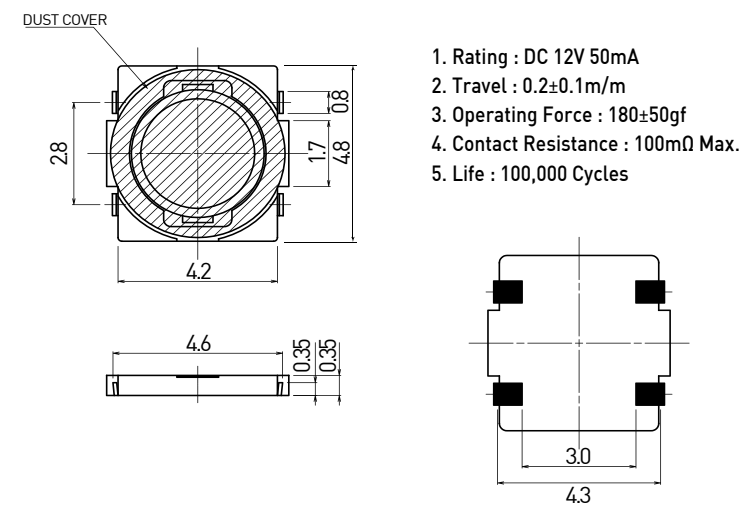

1. Rating : DC 12V 50mA
2. Travel : 0.2±0.1m/m
3. Operating Force : 180±50gf
4. Contact Resistance : 100mΩ Max.
5. Life : 100,000 Cycles

STP-1100

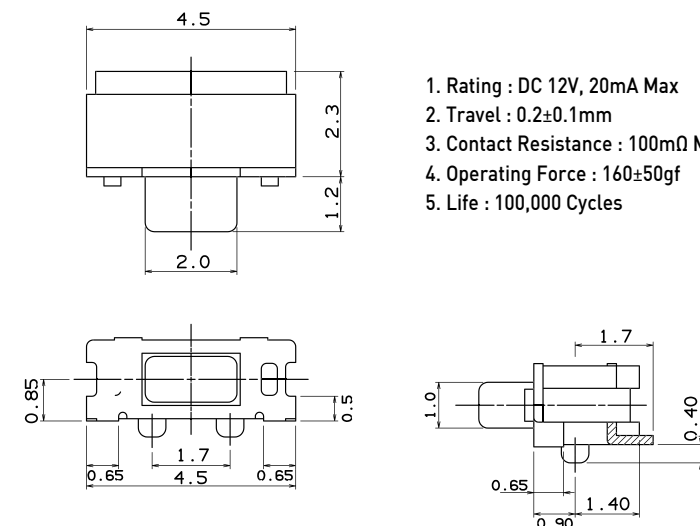


1. Rating : DC 12V, 20mA Max
2. Travel : 0.2±0.1mm
3. Contact Resistance : 100mΩ Max.
4. Operating Force : 160±50gf
5. Life : 100,000 Cycles

TACT SWITCH (SMD TYPE)

STP-1112E





Model No.	Operating Force
STP 1112E	180gf
STP 1112ES	250gf

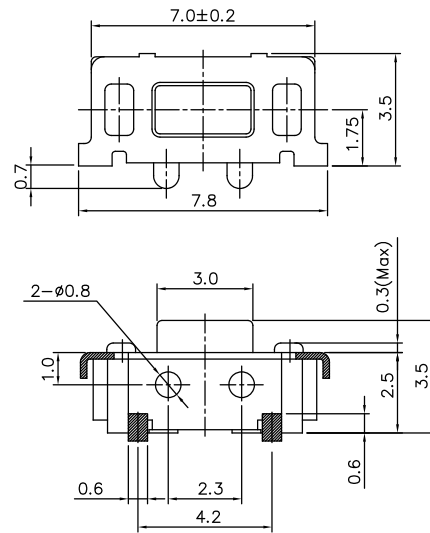


1. Rating : DC 12V, 50mA
2. Travel : 0.25mm
3. Contact Resistance : 100mΩ Max.
4. Life : 50,000 Cycles

STP-1185

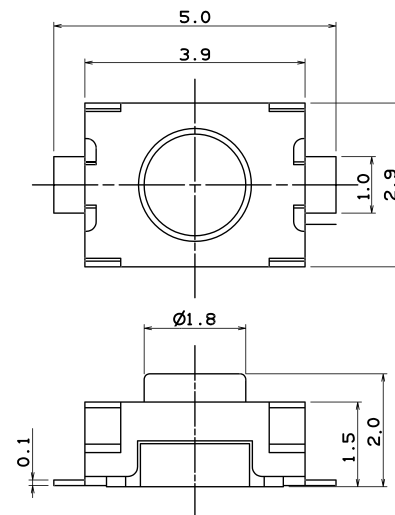

1. Rating : DC 12V, 50mA
2. Travel : 0.15mm
3. Contact Resistance : 100mΩ Max.
4. Life : 100,000 Cycles
5. Operating Force : 160±50gf

STP-1185U

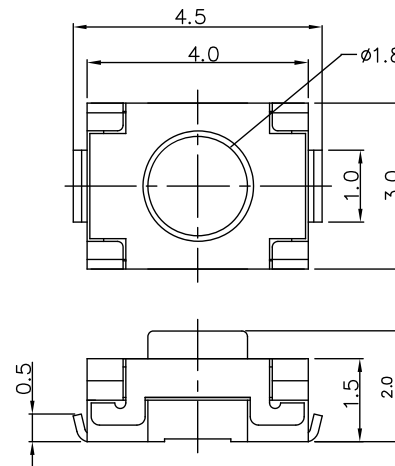

1. Rating : DC 12V, 50mA
2. Travel : 0.2mm
3. Contact Resistance : 100mΩ Max.
4. Life : 100,000 Cycles
5. Operating Force : 250±50gf

TACT SWITCH


STP-1159

WATER PROOF SWITCH



Model No.	L
STP 1159	4.3
STP 1159A	5.0
STP 1159B	7.0
STP 1159C	10.0

1. Rating : D.C 12V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Operating force : 160gf, 180gf, 200gf±70gf
4. Travel : 0.30±0.1mm
5. Life : 100,000 cycles

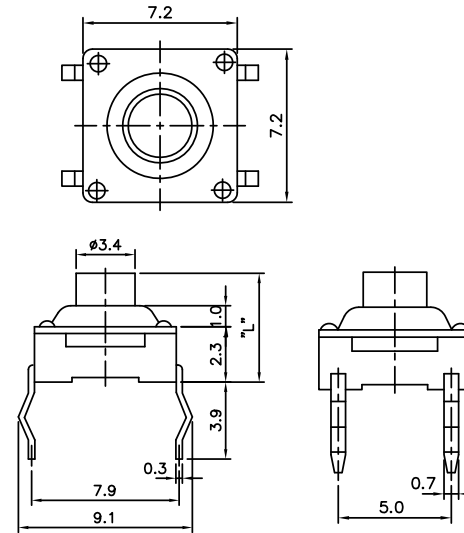


STP-1159S

WATER PROOF SWITCH



Model No.	L
STP 1159S	4.3
STP 1159SA	5.0
STP 1159SB	7.0


1. Rating : D.C 12V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Operating force : 200gf±70gf
4. Travel : 0.30±0.1mm
5. Life : 100,000 cycles

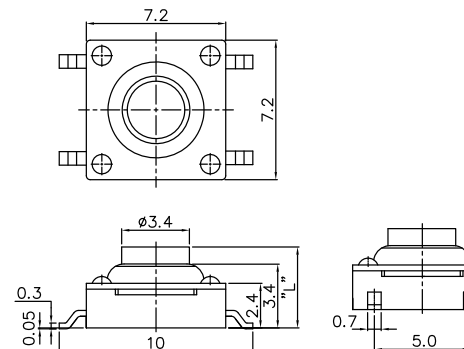

STP-1199




1. Rating : DC 16V, 50mA
2. Contact Resistance : 100mΩ Max.
3. Travel : 1.3mm±0.3mm
4. Operating Force : 250/300gf±70gf
5. Life : 100,000 cycle

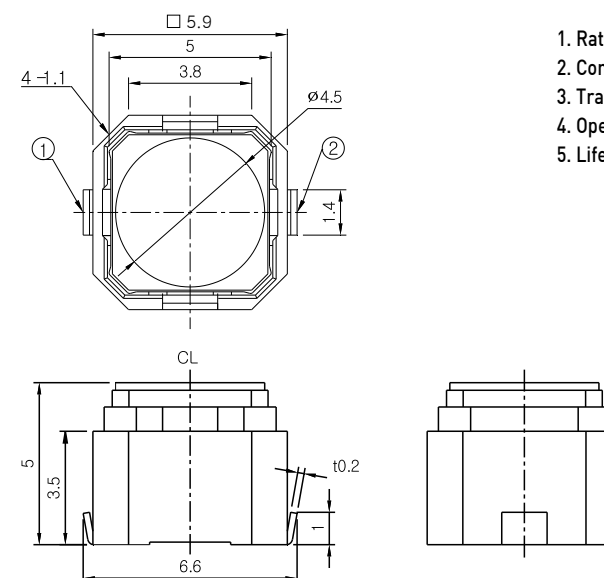


PUSH SWITCH

SPS-2271

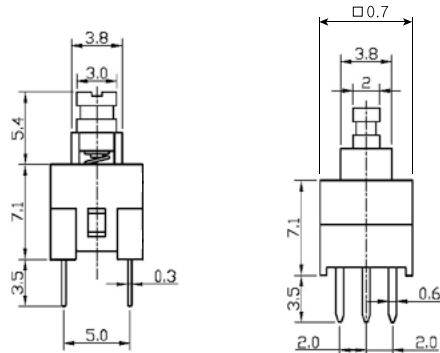

- 1. Rating : DC 30V, 0.1A
- 2. Circuit : 2C-2P
- 3. Timing : Shorting or Non-shorting
- 4. Operating Mode : Self-Lock, Non-Lock
- 5. Travel : Full 2.1 / Lock 1.0
- 6. Operating Force : 200±50gf



SPS-2284

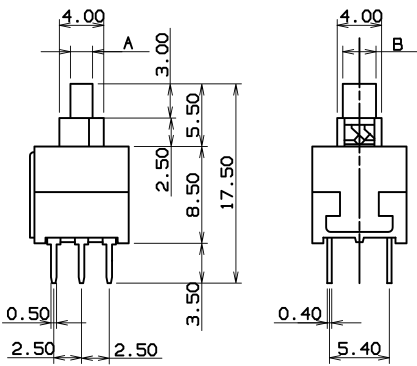

- 1. Rating : DC 30V, 0.1A
- 2. Circuit : 2C-2P
- 3. Timing : Non-shorting
- 4. Operating Mode : Self-Lock, Non-Lock
- 5. Travel : Full 2.5 / Lock 1.5
- 6. Operating Force : 200±50gf


Model No.	A	B
SPS 2284	2.0	3.0
SPS 2284A	3.0	3.0
SPS 2284B	3.3	3.3

SPS-2259

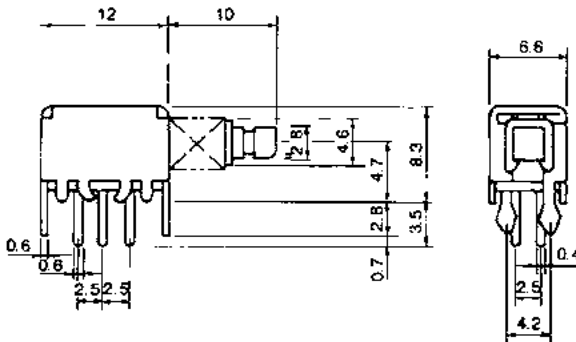

- 1. Rating : DC 50V, 0.3A
- 2. Circuit : 2C-2P
- 3. Timing : Shorting or Non-Shorting
- 4. Terminal : P.C. Board Terminal
- 5. Operating Mode : Self Lock, Non-Lock
- 6. Stroke : Full 3.5, Lock 2.5
- 7. Operating Force : 330±100gf

TC-1104
TC-1108 CAP

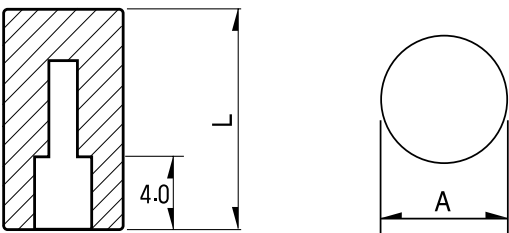

Model No.	A	L
TC 1104	φ 5.0	9.0
TC 1108	φ 7.0	12.0

• Application model
SPS-2259

COLOR : White(W), Blue(BL),
Red(R), Ivory(V),
Black(B), Gray(GR)


LED MODULE
& OPTO PIPE


LED SPECIFICATION	68
φ 3 LED Module	69
φ 5 LED Module	73
φ 2 LED Module	74
2×3, 2×5, ARRAY LED Module	75
φ 3, φ 5 LED Holder	75
OPTO PIPE	76
FRAME GROUND & GUIDE RAIL	77

LED SPECIFICATION


Package		LED TYPE	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data (At 20mA)			Viewing Angle 2θ1/2 (deg)
			Emitted Color	Peak Wave Length λP(nm)		Δλ (nm)	Pd (mW)	If (mA)	Peak If(mA)	VF(V)		Iv Typ. (mcd)	
										Typ.	Max.		
 (3 ∅)	High Efficiency	01	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50
			Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50
			Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50
			Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50
			Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45
	Low Current	02	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50
			Green	568	Green Diffused	30	16	7	-	1.9	2.3	7.0	50
			Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50
	Integral Resistor 5V	03	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-
			Green	568	Green Diffused	-	-	8	-	5	-	15.5	-
			Yellow	585	Yellow Diffused	-	-	8	-	5	-	14.0	-
			Orange	635	Orange Diffused	-	-	8	-	5	-	15.5	-
	Bi-color	07	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45
			Green	568		30	100	30	150	2.2	2.6	30.0	45
			Yellow	585	White Diffused	35	100	30	150	2.1	2.6	20.0	45
			Green	568		30	100	30	150	2.2	2.6	30.0	45

 flangeless 5 ∅	1.0" Lead Flangeless 4.8 ∅	01	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40
			Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	40
			Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40
	T-1 3/4 1.0" Lead Flangeless 5 ∅	01	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	13.0	45
			Green	568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45
			Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45
			Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45
		07	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	45.0	45
			Green	568		30	100	30	150	2.2	2.6	50.0	45
			Yellow	585	White Diffused	35	100	30	150	2.1	2.6	35.0	45
			Green	568		30	100	30	150	2.2	2.6	50.0	45

 lead standard 5 ∅	T-1 3/4 1.0" Lead Standard 5 ∅	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	40
		Green	568		30	100	30	150	2.2	2.6	45.0	40
		Yellow	585	White Diffused	35	100	30	150	2.1	2.6	30.0	40
		Green	568		30	100	30	150	2.2	2.6	45.0	40

 rectangular	2.0x5.0x7.0 1.0" Lead Rectangular	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.0	80
		Green	568		30	100	30	150	2.2	2.6	4.5	80

SEA-0φ07

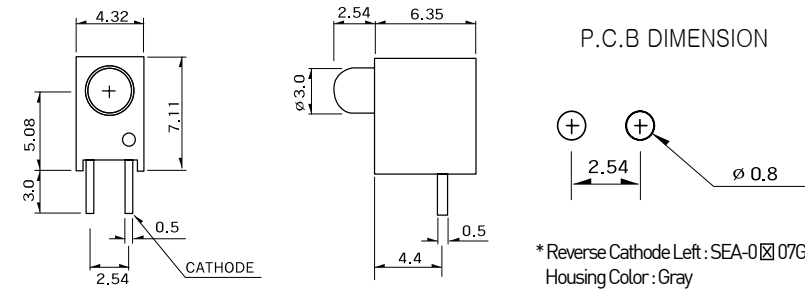


P.C.B DIMENSION

* Reverse Cathode Left : SEA-0φ07G
Housing Color : Gray

Model	SEA-0207	SEA-0307	SEA-0407	SEA-2507	SEA-0507	SEA-0607	SEA-0707	SEA-0807	SEA-1107	SEA-1207	SEA-1307	SAA-0312	SAA-0332
LED Color	Green	Yellow	Red	Amber	Red (SV)	Green (SV)	Yellow (SV)	Blue	Red (Low)	Yellow (Low)	Green (Low)	Red / Green	Yellow / Green

SEF-0φ05

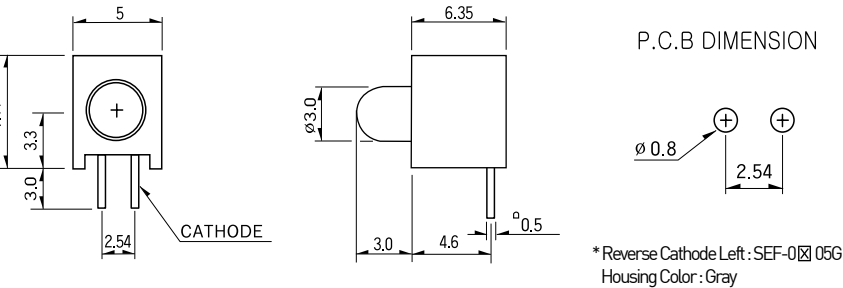


P.C.B DIMENSION

* Reverse Cathode Left : SEF-0φ05G
Housing Color : Gray

Model	SEF-0205	SEF-0305	SEF-0405	SEF-2505	SEF-0505	SEF-0605	SEF-0705	SEF-0805	SEF-1105	SEF-1205	SEF-1305	SEF-3005	SEF-3105
LED Color	Green	Yellow	Red	Amber	Red (SV)	Green (SV)	Yellow (SV)	Blue	Red (Low)	Yellow (Low)	Green (Low)	Red / Green	Yellow / Green

SCB-030φB

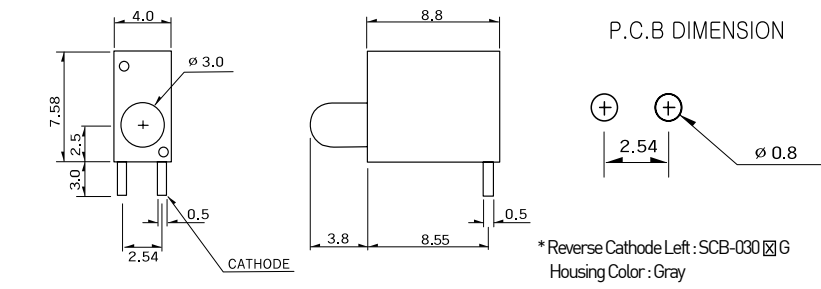


P.C.B DIMENSION

* Reverse Cathode Left : SCB-030φG
Housing Color : Gray

Model	SCB-0302B	SCB-0303B	SCB-0301B	SCB-0304B	SCB-0315B	SCB-0305B	SCB-0306B	SCB-0307B	SCB-0308B	SCB-0309B	SCB-0310B	SCB-3007B	SCB-3107B
LED Color	Green	Yellow	Red	Amber	Blue	Red (SV)	Green (SV)	Yellow (SV)	Red (Low)	Yellow (Low)	Green (Low)	Red / Green	Yellow / Green

SER-3φ10


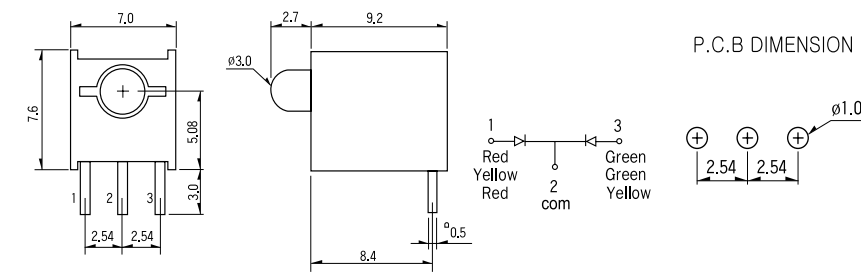


P.C.B DIMENSION



Model	SER-3510	SER-3610	SER-3710
LED Color	Red / Green	Yellow / Green	Red / Yellow

LED MODULE(φ3)



SEC-01

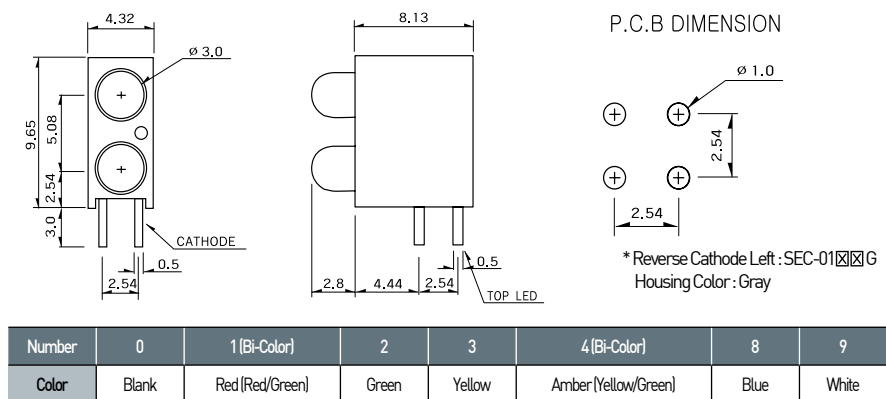



SCD-01

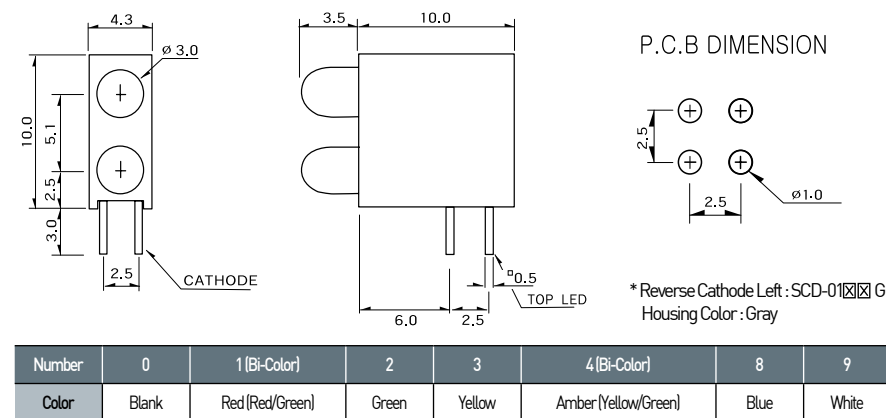

SEJ-30

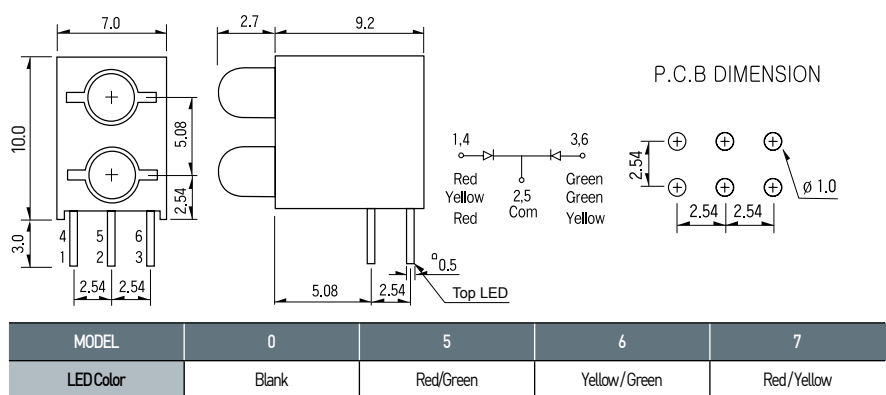



SEA-01

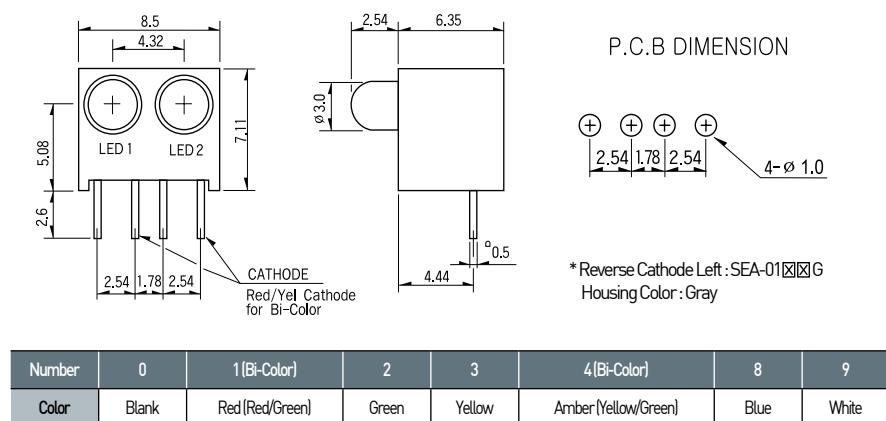



LED MODULE(φ3)



SEF-01

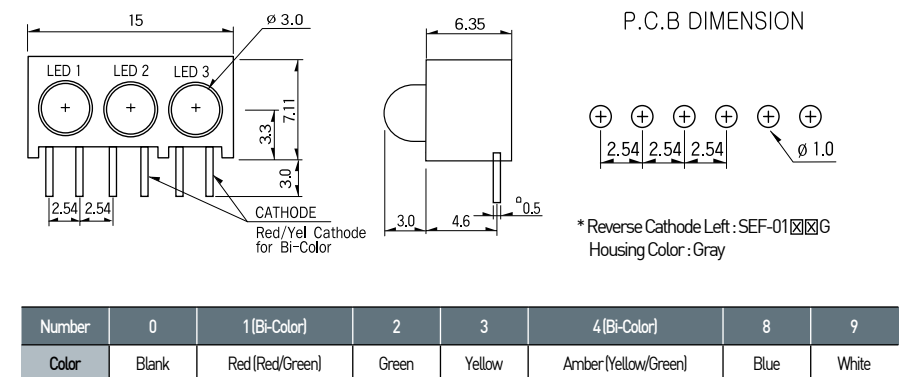


SFD-0100

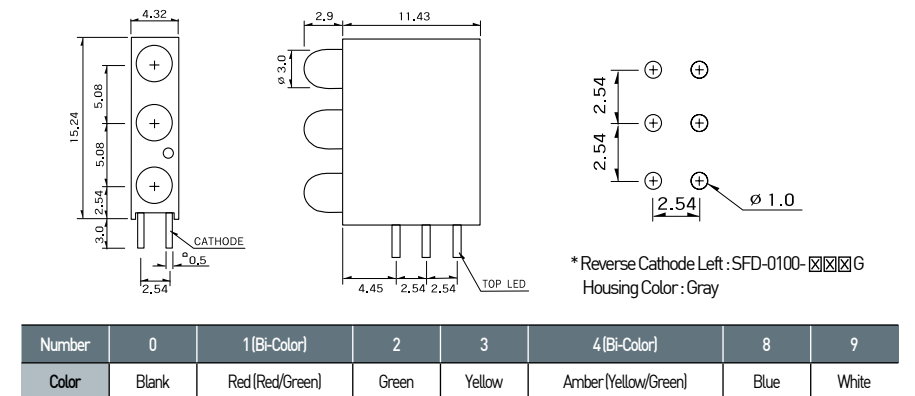

SFH-010

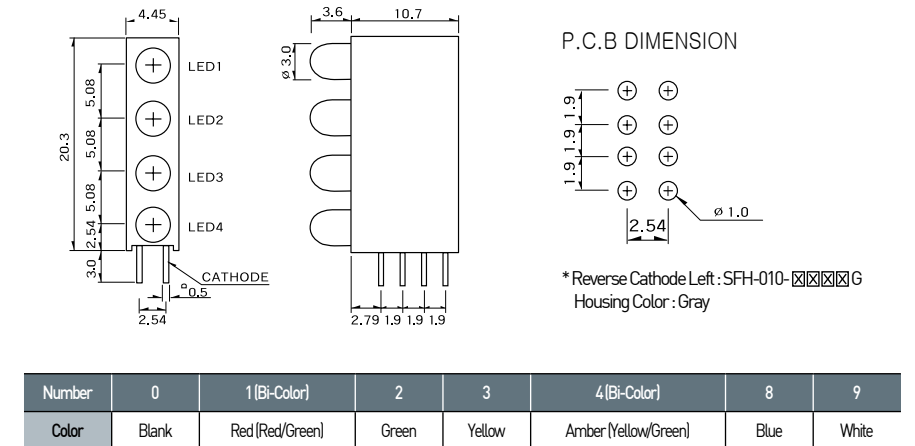



SCE-XXXX-XX

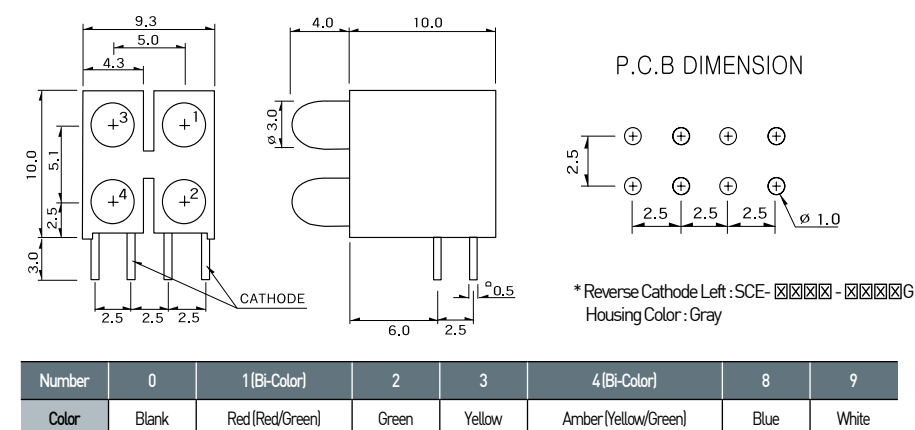



LED MODULE(φ3)

SEA-01-XXXX

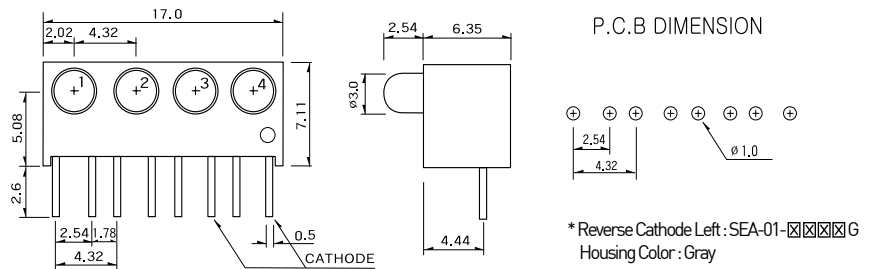



MODEL	1	2	3	4	SAA-0312-04	SAA-0332-04	8	9
LEDColor	Red	Green	Yellow	Amber	Red/Green	Yellow/Green	Blue	White

SEF-01-XXXXX

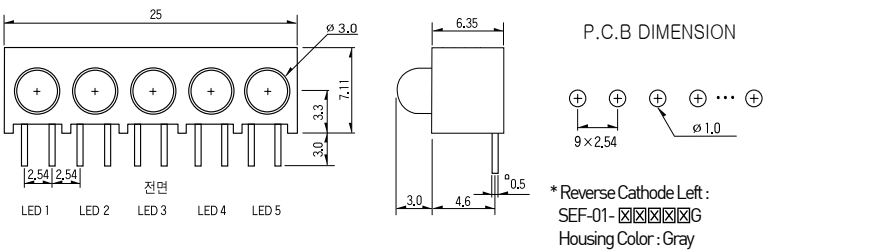

Number	0	1 [Bi-Color]	2	3	4 [Bi-Color]	8	9
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue	White


SEF-01-XXXXXXX

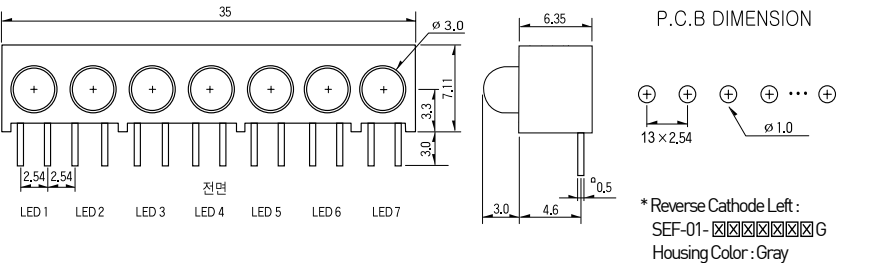

Number	0	1 [Bi-Color]	2	3	4 [Bi-Color]	8	9
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue	White


LED MODULE(φ5)

SEO-0XX07

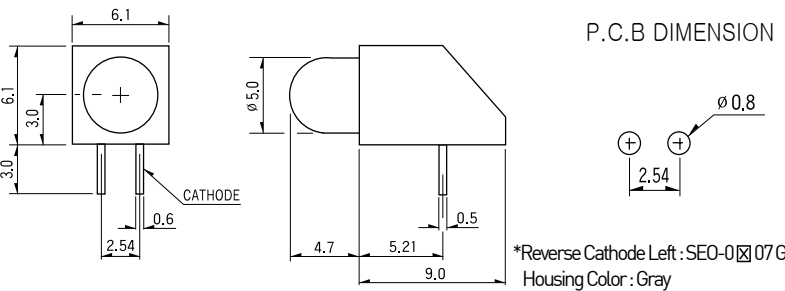


Model	SEO-0207	SEO-0307	SEO-0407	SEO-2507	SEO-0507	SEO-0607	SEO-0707	SEO-0807	SEO-3007	SEO-3107
LEDColor	Green	Yellow	Red	Amber	Green/Water Clear	Yellow/Water Clear	Red/Water Clear	Blue	Red/Green	Yellow/Green


SEB-01XX

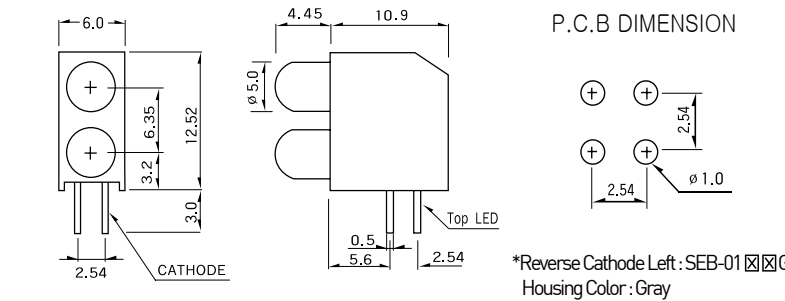


MODEL	0	1 [Bi-Color]	2	3	4 [Bi-Color]	8
LEDColor	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue



SUE-01-XX-XX

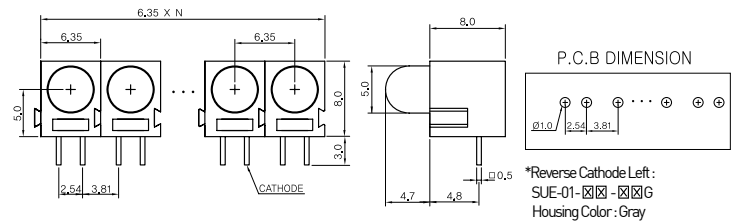

Number	0	1 [Bi-Color]	2	3	4 [Bi-Color]	8
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue





LED MODULE(φ2), (2x3)

SGG-010-□□□




SGG-010-□□□
General Type LED 1 LED 2 LED 3

SGG-070-□□□
Bi-color Type LED 1 LED 2 LED 3




P.C.B DIMENSION



*Reverse Cathode Right:
SGG-010-□□□G
Base Color : Gray



Number	0	1	2	3	4
General Color	Blank	Red	Green	Yellow	Amber
Bi-Color	Blank	Red/Green	-	-	Yellow/Green

SGH-010-□□□□




SGH-010-□□□□
General Type LED 1 LED 2 LED 3 LED 4

SGH-070-□□□□
Bi-color Type LED 1 LED 2 LED 3 LED 4



P.C.B DIMENSION



*Reverse Cathode Right:
SGH-010-□□□□G
Base Color : Gray



Number	0	1	2	3	4
General Color	Blank	Red	Green	Yellow	Amber
Bi-Color	Blank	Red/Green	-	-	Yellow/Green

SGI-010-□□□□□




SGI-010-□□□□□
General Type LED 1 LED 2 LED 3 LED 4 LED 5

SGI-070-□□□□□
Bi-color Type LED 1 LED 2 LED 3 LED 4 LED 5




P.C.B DIMENSION





*Reverse Cathode Right:
SGI-010-□□□□□G
Base Color : Gray

Number	0	1	2	3	4
General Color	Blank	Red	Green	Yellow	Amber
Bi-Color	Blank	Red/Green	-	-	Yellow/Green

SFG-□□□□



SFG-□□□□
LED 1 LED 2 LED 3 LED 4




P.C.B DIMENSION



*Reverse Cathode Left : SFG-□□□□ G
Housing Color : Gray

Number	0	1	2	3	4	8
Color	Blank	Red	Green	Yellow	Amber	Blue


LED ARRAY, LED HOLDER(φ3, φ5)




P.C.B DIMENSION




MODEL	1 (Bi-Color)	2	3	4 (Bi-Color)
LED Color	(Red/Green)	Green	Yellow	(Yellow/Green)




P.C.B DIMENSION




MODEL	1	2	3	4
LED Color	Red	Green	Yellow	Amber

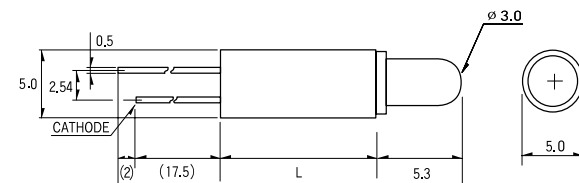


P.C.B DIMENSION



MODEL	3S-2141-S	3S-3141-S	3S-5141-S	3S-1141-S	3S-2441-S	3S-3441-S	3S-5441-S	3S-BB33-S
LED Color	Green	Yellow	Red	Amber	Green Color Clear	Yellow Color Clear	Red Color Clear	Blue Water Clear

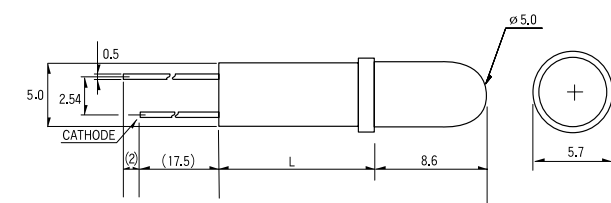


P.C.B DIMENSION




MODEL	5S-2134-S	5S-3134-S	5S-5134-S	5S-1134-S	5S-2434-S	5S-3434-S	5S-5434-S	5S-BB41-S
LED Color	Green	Yellow	Red	Amber	Green Color Clear	Yellow Color Clear	Red Color Clear	Blue Water Clear

3SA-□□-□□12T




3SA-01-□□-□□12T
LED TYPE LEFT LED
SEE PAGE #68

5SA-□□-□□12T




5SA-01-□□-□□12T
LED TYPE LEFT LED
SEE PAGE #68

3S-□□41-S□□T□



3S-□□41-S□□T□
LED SPEC Housing Lenth(L) (02-20) R:Rubber
ex) 8mm → S08T P:Plastic

5S-□□34-S□□T□




5S-□□34-S□□T□
LED SPEC Housing Lenth(L) (02-20) R:Rubber
ex) 8mm → S08T P:Plastic

OPTO PIPE

SPLE1 □□□□




Material : Polycarbonate (P.C) -UL
Flame Class : 94V-2
Color : Clear (Transparent)

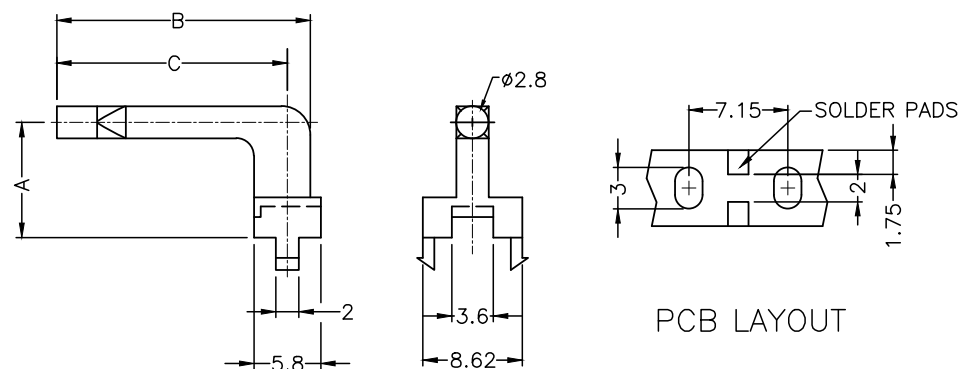

SPLE2 □□□□




Material : Polycarbonate (P.C) -UL
Flame Class : 94V-2
Color : Clear (Transparent)

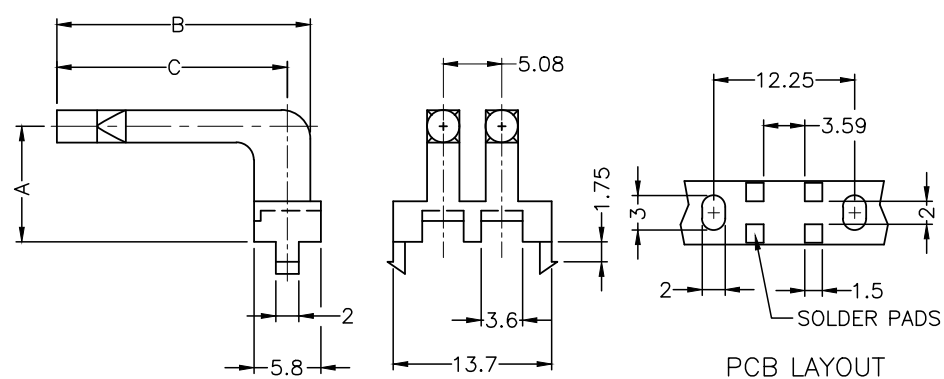

SPLE3 □□□□




Material : Polycarbonate (P.C) -UL
Flame Class : 94V-2
Color : Clear (Transparent)

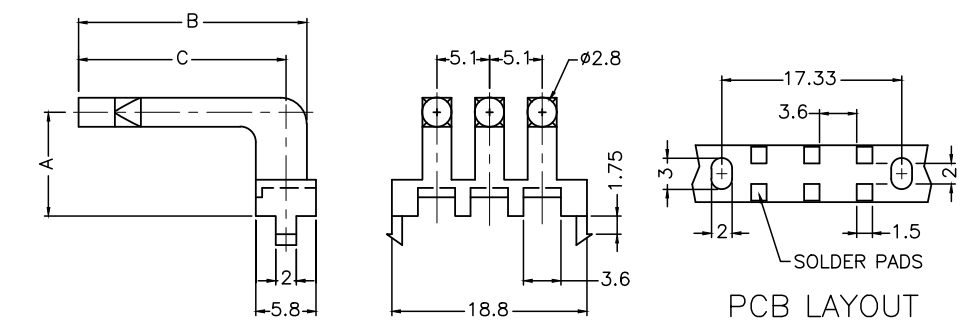

SPLE4 □□□□




Material : Polycarbonate (P.C) -UL
Flame Class : 94V-2
Color : Clear (Transparent)

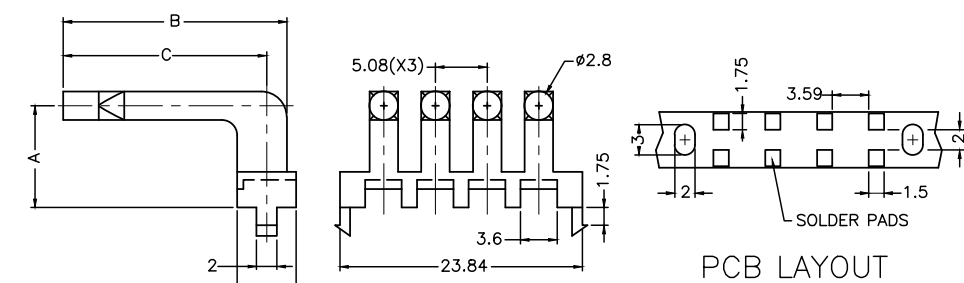

FRAME GROUND & GUIDE RAIL


FRAME GROUND

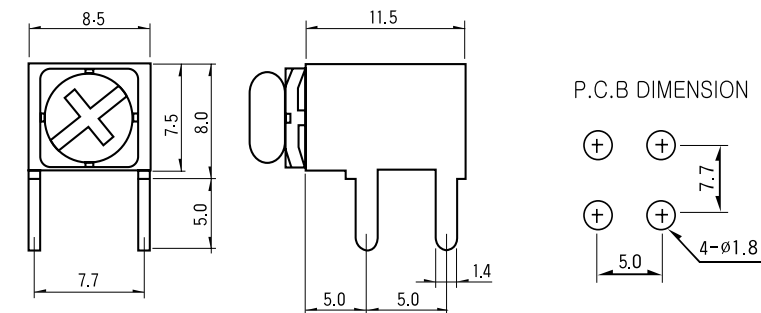


FGR-1101



GUIDE RAIL

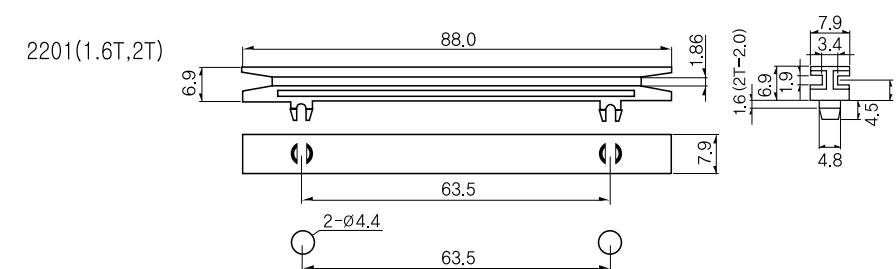

SCG-2201

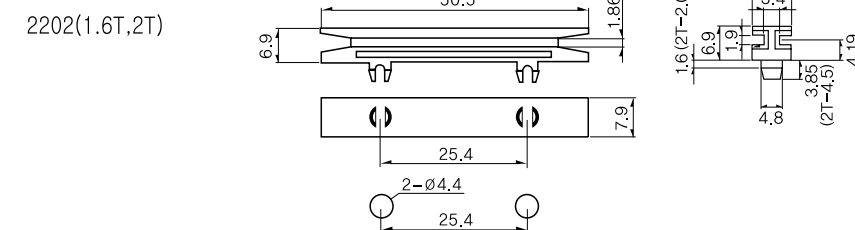

SCG-2202



CHIP LED & LED LAMP

GENERAL INFORMATION (CHIP LED)	79
GENERAL LED LAMP (3, 5)	90

GENERAL INFORMATION (CHIP LED)

PRECAUTIONS FOR USING BRIGHT CHIP LED PRODUCTS

1. SOLDERING

Manual Of Soldering


The temperature of the iron tip should not be higher than 300°C(572°F) and soldering within 3 seconds per solder-land is to be observed.

Reflow Soldering

Preheating : 140°C-160°C±5°C, within 2 minutes.

Operation heating : 235°C(Max.), within 10 seconds.(Max.)

Gradual Cooling(Avoid quenching)

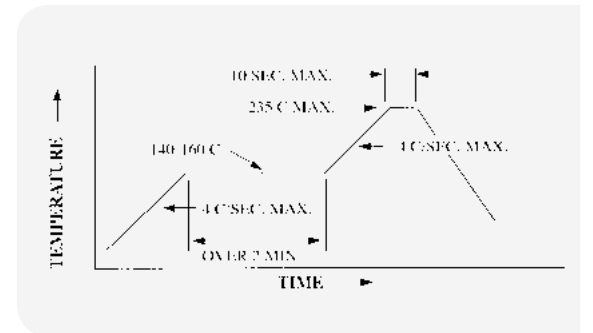

2. Handling

Care must be taken not to cause stress to the epoxy resin portion of **BRIGHT LEDs** while it is exposed to high temperature

Care must be taken not to rub the epoxy resin portion of **BRIGHT LEDs** with hard or sharp article such as the sand blast and the metal hook.

3. Notes for designing

Care must be taken not to provide the current limiting resistor in the circuit so as to drive the **BRIGHT LEDs** within the rated figures. Also, caution should be taken not to overload **BRIGHT LEDs** with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive, care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as not to subjected to reverse voltage when turning off the **BRIGHT LEDs**.

4. Storage

In order to avoid the absorption of moisture. It is recommended to solder **BRIGHT LEDs** as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following :

Temperature : 5°C-30°C(41°F-86°F) Humidity : RH 60% Max.

GENERAL INFORMATION (CHIP LED)

QUAITY CONTROL AND ASSURANCE

1. SAMPLING PLAN

U.S. Ministry of defense MIL-STD-105D level II (single sampling plans)

2. INSPECTION ITEMS AND CRITERIONS FOR JUDGEMENTS

Measuring Methods for light Emitting Diode (No.11830)and Light Emitting Diodes(NO.11829)
Stipulated by ministry of economical affairs of R.O.C. and by reference to Q.C. Standards prevailing in prominent LED plants worldwide.

3. RELIABILITY TESTS

General Provisions for Environmental Tests of CNS-Categorized Electronic Parts,
3623-3634, 5637, 11233-11238, and U.S. Ministry of National Defense MIL-STD-750 Specifications.

Test Item	Test Conditions
Operation Life Test	LED connected to a source of power and charged with 20mA at room temperature (25℃) for 1000 hours.
Temperature Cycle Test	-35℃~+25℃ RH=80%~+85℃ RH=80% as 1 cycle (60minutes) (20minutes) (60minutes) The duration of the test shall be for 5 complete cycle.
Thermal Shock Test	LED placed in a chamber(-35℃)for 20 minutes, temperature increased instantaneously to +85℃ for 20minutes. The duration of the test shall be for 10 complete cycles.(MIL-STD-202:107D)
High Temperature Storage Test	Ta=85℃±5℃ RH=50% Test Time : 1000 hours.
Low Temperature Storage Test	Ta=35℃±5℃ Test Time : 1000 hours.
Humidity Storage Test	Ta=65℃±5℃ RH=90~95% Test Time : 1000 hours.
Solderability Test	Preheating : 140℃~160℃, within 2 minutes. Operation heating : 235℃(Max.), within 10 seconds.(Max.)

The measuring terms after test and failure criteria as follows:

Measuring Terms	Failure Criteria
Luminous Intensity(Iv)	Lower Standard Limit x0.5
Forward Voltage(Vf)	Lower Standard Limit x1.2
Reverse Current(Ir)	Lower Standard Limit x2.0

GENERAL INFORMATION (CHIP LED)

ABSOLUTE MAXIMUM RATINGS


1. Test condition For Each Parameter

Parameter	Symbol	Unit	Test condition
Reverse voltage	VR	V	-
Reverse Current	IR	UA	VR=5.0Volt
Forward Voltage	VF	V	IF=20mA
Luminous Intensity	IV	Mcd	IF=10mA
Viewing Angle	2Θ1/2	Degree	IF=20mA
Spectral Line Half-Width	Δλ	nm	IF=20mA
Power Dissipation	PD	mw	IF=20mA
Peak Forward Current{Duty 1/10 1KHZ}	IFP	mA	IFP=150mA

2. Absolute Maximum Ratings


Reverse Voltage	5.0 Volt
Reverse Current(VR=5V)	≤ 100uA
Operating Temperature Range	-25℃~+80℃
Storage Temperature Range	-30℃~+85℃

TYPICAL ELECTICIACAL-OPTICAL CHARACTERISTICS CURVES

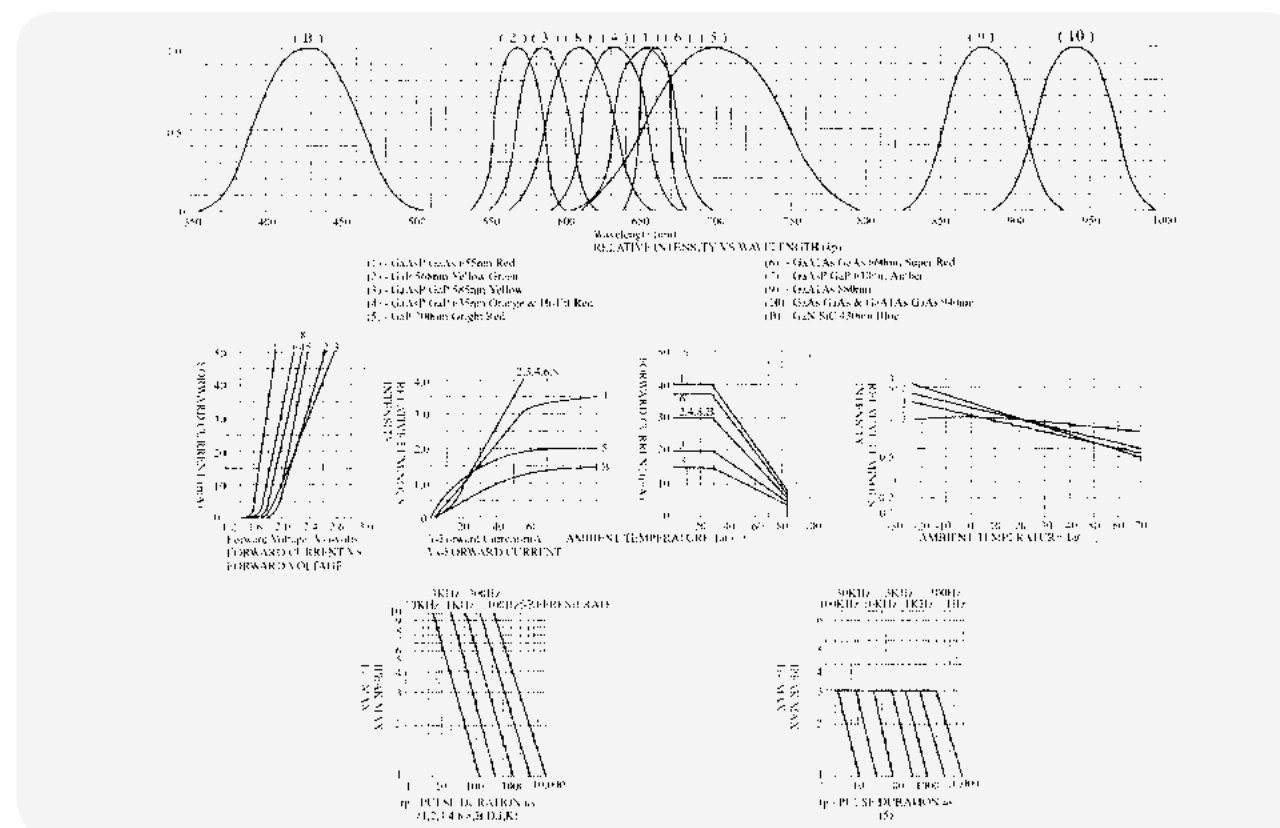

GENERAL INFORMATION (CHIP LED)

SELECTION GUIDE TO CHIP LED LAMP(PART NO. SYSTEM)

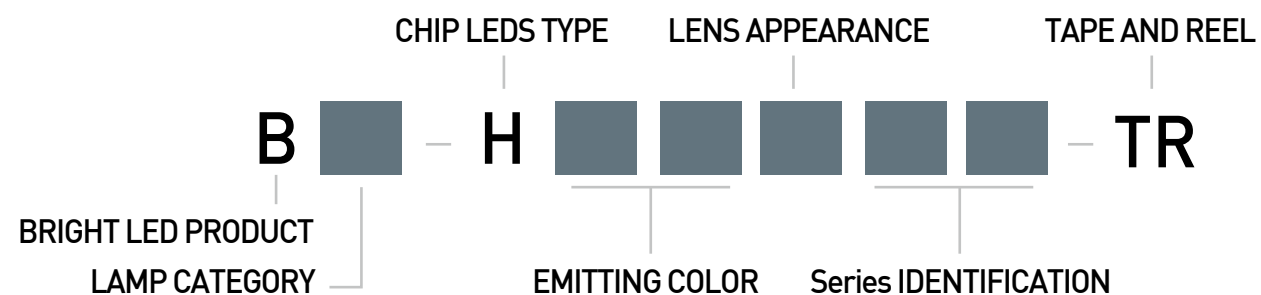

LAMP CATEGORY : Series IDENTIFICATION:

L : Standard Lamp	1 : Ceramics Chip Type	2 : Reflectors Chip Type	3 : 1206/Flat Chip Type
B : Blinking Lamp	3A : 1206/Lens Chip type	4A : 1204/Oval Chip type	4B : 1210/Flat Chip Type
R : Resistor Lamp	4F : 1210/Flat Chip type	5 : 0805/Flat Chip type	6 : 0603/Flat Chip type

LENS APPERANCE:

1 : Color Diffused	2 : White Diffused
3 : Water Clear	4 : Color Transparent


PACKAGE TYPE:

H: Chip Lamp	X : Axial
--------------	-----------

EMITTING COLOR:

Ax : GaAsp/Gap 610nm/Amber(7)	Bo : GaN/Sic 430nm/Super Blue(7)	B ₁ : InGaN/Sic 450nm/Super Blue
B ₂ : InGaN/Sic 470nm/Super Blue	Dx : GaAlAs/GaAs 660nm/DH Red	Ex : GaAsp/Gap 635nm/Super Orange(4)
Fx : GaAlAs/GaAlAs 660nm/DDH	Gx : Gap/Gap 568nm/Yellow Green(2)	G4 : InGaN/Sic 505nm/Super B/G
Hx : Gap/Gap 700nm/Bright Red(5)	Jx : AlGalnP 620nm/Super Orange	Kx : AlGalnP 595nm/Super Yellow
Rx : GaAsp/GaAs 655nm/Red(1)	Sx : GaAlAs/GaAs 660nm/SH Red(6)	Wx : Gap/Gap 555nm/Pure Green(9)
Xx : Gap/Gap 568nm/Hi-Eff. Green	Yx : GaAsp/Gap 585nm/Yellow(3)	

CHIP LEDS : (Dual Color & Full Color Type)

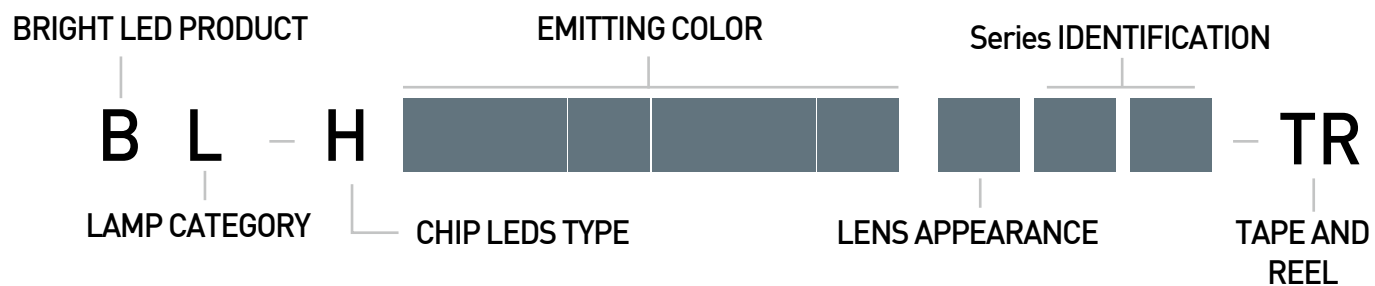


Series IDENTIFICATION :

3 : 1206/Dual-Color Chip Type	3B : 1210/Dual-Color Chip Type	3F : 1210/Dual-Color Type
3F : 1210/Full-Color Chip Type		

SURFACE MOUNT CHIP LED LAMP

SMD LED 0603-0.6T

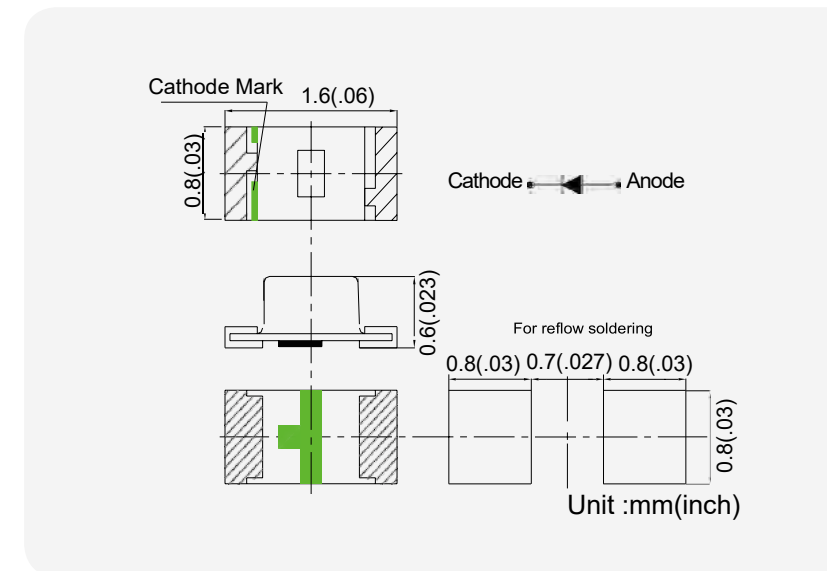


Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @I _F =5 mA		IV(mcd) @I _F =5m A		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HB336A	Blue	460-475	Transparent	2.8	3.2	28	63	120°
BL-HGK36A	Green	520-535		2.6	3.2	63	140	

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @I _F =20 mA		IV(mcd) @I _F =20m A		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HG036A	Yellow Green	566-576	Transparent	2.2	2.6	3.7	10	120°
BL-HY036A	Yellow	584-594		2.2	2.6	3.7	8.2	
BL-HS136A	Red	638-648		2.2	2.6	5.5	12.3	
BL-HUE136A	Super Red	625-635		2.0	2.6	63	100	
BL-HE136A	Super Red	626-636		2.0	2.6	3.7	8.2	
BL-HG836A	Green	520-535		3.2	3.6	140	317	
BL-HGE36A	Yellow Green	566-576		2.2	2.6	18.5	42	
BL-HKC36A	Yellow	584-594		2.2	2.6	63	120	
BL-HJF36A	Super Amber	600-610		2.1	2.6	28	50	
BL-HJC36A	Amber	600-610		2.2	2.6	63	140	
BL-HJE36A	Orange Red	615-625		2.2	2.6	63	100	
BL-HUB36A	Red	620-640		2.2	2.6	28	63	

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @I _F =20 mA		IV(mcd) @I _F =20m A		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BIR-HM136A	IR	940	Transparent	1.2	1.7	0.92	2.57	120°

SURFACE MOUNT CHIP LED LAMP

SMD LED 0603-0.4T

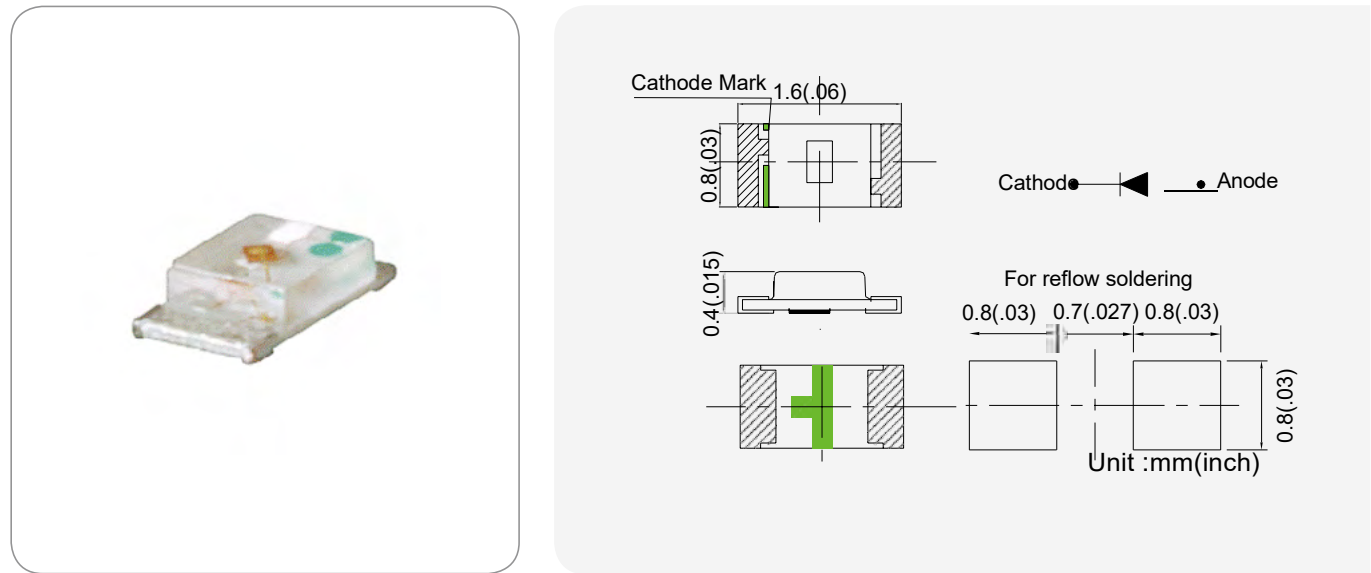


Part No.	Emitted Color	X	Y	Lens Appearance	Vf(V) @If = 5 mA		IV(mcd) @If = 5 mA		Viewing Angle 2θ1/2 (deg)
		Typ.	Typ.		Typ.	Max.	Typ.	Max.	
BL-HZ336G-L8	White	0.28	0.28	Yellow Clear	2.8	3.2	42	140	120°

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If = 5 mA		IV(mcd) @If = 5 mA		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HB336G	Blue	460-475	Transparent	2.8	3.2	28	63	120°
BL-HGK36G	Green	520-535		2.6	3.2	63	140	

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If = 20 mA		IV(mcd) @If = 20 mA		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HG836G	Green	520-535	Brilliant Blue	3.2	3.6	140	317	120°
BL-HGE36G	Yellow Green	566-576		2.2	2.6	18.5	42	
BL-HKC36G	Yellow	584-594		2.2	2.6	63	120	
BL-HJC36G	Amber	600-610		2.2	2.6	63	140	
BL-HJE36G	Orange Red	615-625		2.2	2.6	63	100	
BL-HBH36G	Super Blue	465-470		3.2	3.6	63	100	
BL-HUB36G	Red	465-470		2.2	2.6	28	63	

SURFACE MOUNT CHIP LED LAMP

SMD LED 0805-1.0T

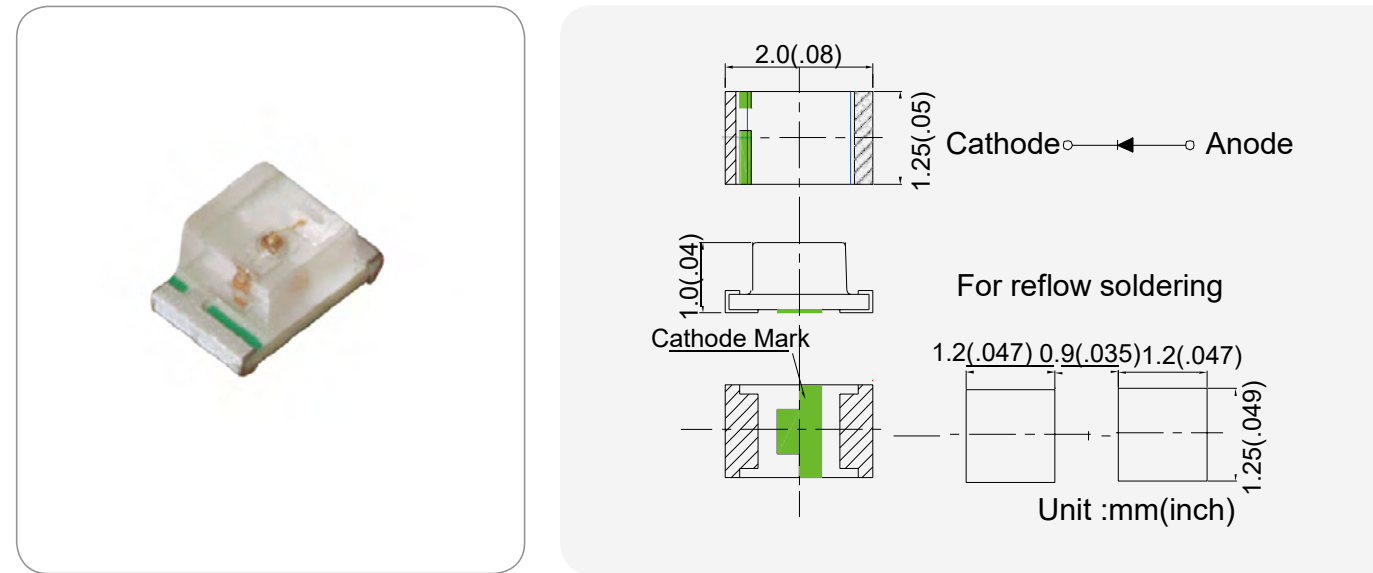


Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If = 5 mA		IV(mcd) @If = 5 mA		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HB335A	Blue	460-475	Transparent	2.8	3.2	28	63	120°
BL-HGK35A	Green	520-535		2.6	3.2	63	140	

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If = 20 mA		IV(mcd) @If = 20 mA		Viewing Angle 2θ1/2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HG835A	Green	520-535	Transparent	3.2	3.6	140	317	120°
BL-HGE35A	Yellow Green	566-576		2.2	2.6	18.5	42	
BL-HG035A	Yellow Green	566-576		2.2	2.6	3.7	8.2	
BL-HY035A	Yellow	580-592		2.1	2.6	2.4	6.0	
BL-HUE35A	Super Red	620-635		2.0	2.6	63	120	
BL-HE135A	Super Red	626-636		2.0	2.6	2.4	8.0	
BL-HKC35A	Yellow	584-594		2.2	2.6	63	120	
BL-HJF35A	Super Amber	600-610		2.1	2.6	28	55	
BL-HJC35A	Amber	600-610		2.2	2.6	63	140	
BL-HJE35A	Orange Red	615-625		2.2	2.6	63	100	
BL-HUB35A	Brilliant Red	620-640		2.2	2.6	28	63	
BL-HB435A	Super Blue	465-470		3.2	3.6	28	40	
BL-HB535A	Super Blue	470-475		2.8	3.2	8.2	20	
BL-HS135A	Red	638-648		2.2	2.6	5.5	12.3	

SURFACE MOUNT CHIP LED LAMP

SMD LED 1204-2.0T(Bi-color)

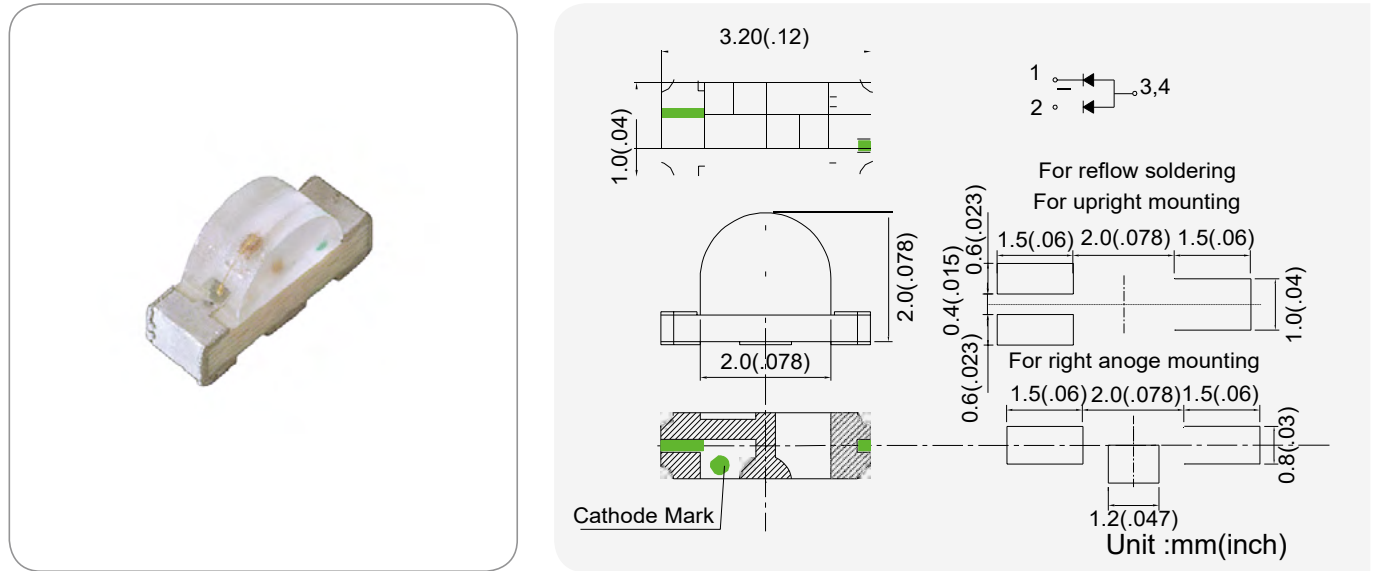


Part No.	Emitted Color	λ_d (nm)	Lens Appearance	Vf(V) $I_{dF}=5\text{ mA}$		IV[mcd] $I_{dF}=5\text{ mA}$		Viewing Angle 2 θ /2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HUBGK34B	Red	620-640	Transparent	2.0	2.4	18.5	35	120°
	Green	620-640		2.8	3.2	63	120	
BL-HUBB534B	Red	620-640		2.0	2.4	18.5	35	
	Blue	460-475		2.8	3.2	28	63	

Part No.	Emitted Color	λ_d (nm)	Lens Appearance	Vf(V) $I_{dF}=20\text{ mA}$		IV[mcd] $I_{dF}=20\text{ mA}$		Viewing Angle 2 θ /2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HUBGE34B	Red	620-640	Transparent	2.2	2.6	28	63	120°
	Yellow Green	566-576		2.2	2.6	18.5	35	
BL-HE1G034B	Yellow	582-592		2.2	2.6	42	94	
	Yellow Green	566-576		2.2	2.6	18.5	35	
BL-HE1G034B	Red	626-636		2.2	2.6	3.7	1.0	
	Yellow Green	626-636		2.2	2.6	3.7	1.0	

SURFACE MOUNT CHIP LED LAMP

SMD LED 1206-1.4T

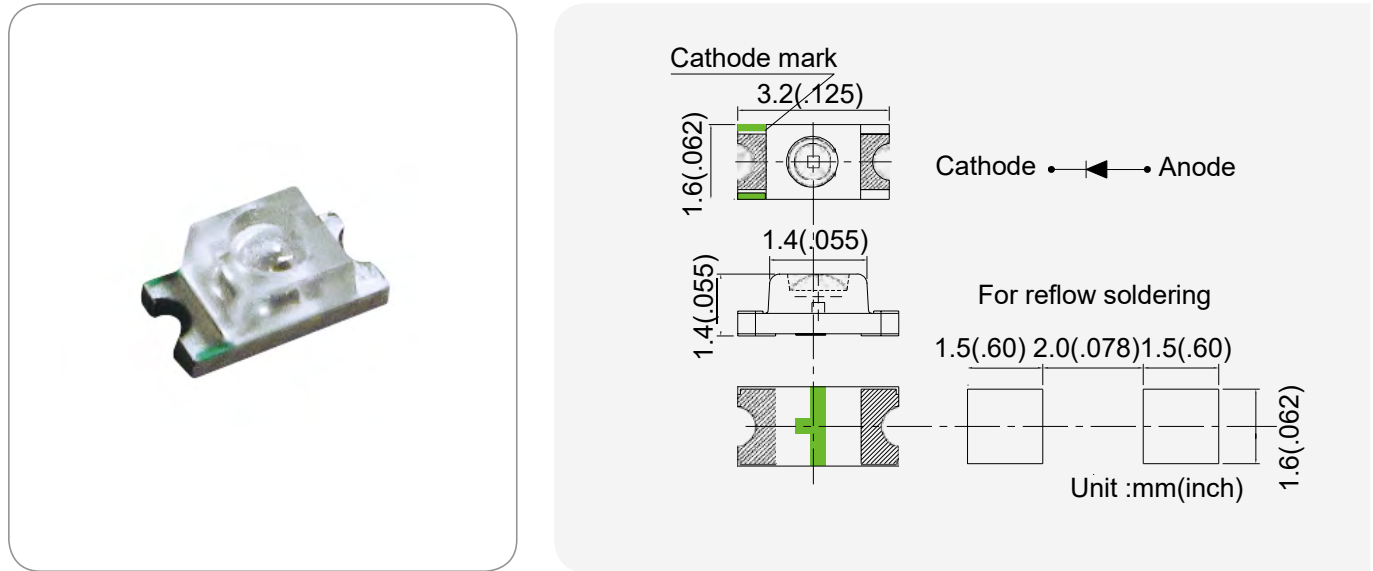


Part No.	Emitted Color	λ_d (nm)	Lens Appearance	Vf(V) $I_{dF}=20\text{ mA}$		IV[mcd] $I_{dF}=20\text{ mA}$		Viewing Angle 2 θ /2 (deg)
				Typ.	Max.	Typ.	Max.	
BL-HY033A	Yellow	584-594	Transparent	2.2	2.6	8.2	18.5	60°
BL-HG033A-	Yellow Green	565-577		2.2	2.6	12	25	
BL-HX133A	Green	566-576		2.2	2.6	18.5	35	
BL-HUB33A	Red	620-640		2.2	2.6	63	140	
BL-HS133A	Red	638-648		2.2	2.6	12.3	28	
BL-HKD33A	Yellow	588-598		2.2	2.6	94	210	
BL-HJE33A	Orange Red	615-625		2.2	2.6	210	475	
BL-HGE33A	Yellow Green	566-576		2.2	2.6	42	94	
BL-HB433A	Blue	460-475		3.2	3.6	94	210	

Part No.	Emitted Color	λ_d (nm)	Lens Appearance	Vf(V) $I_{dF}=50\text{ mA}$		IV[mcd] $I_{dF}=50\text{ mA}$		Viewing Angle 2 θ /2 (deg)
				Typ.	Max.	Typ.	Max.	
BIR-HM133A	IR	940	Transparent	1.2	1.8	2.57	7.07	60°



SURFACE MOUNT CHIP LED LAMP

SMD LED 1206-1.1T

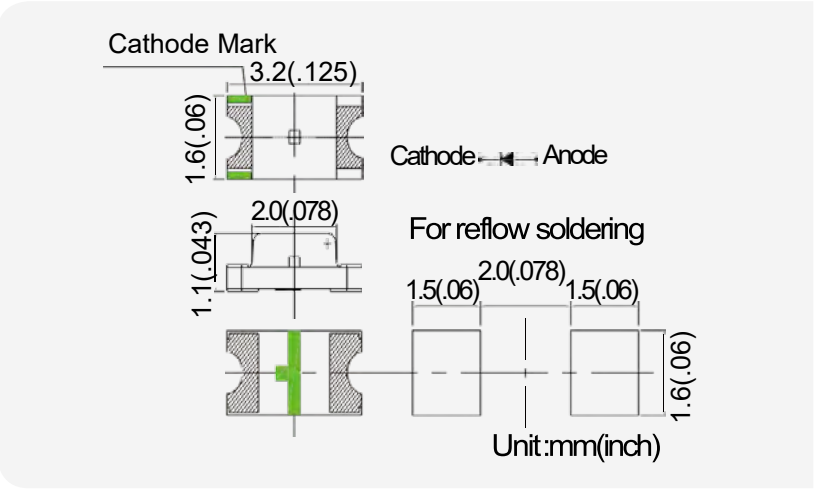

Part No.	Emitted Color	X	Y	Lens Appearance	Vf(V) @If =5 mA		IV[mcd] @If =5 mA		Viewing Angle 2θ1/2 [deg]
		Typ.	Typ.		Typ.	Max.	Typ.	Max.	
BL-HZ333-L21	White	0.28	0.29	Yellow Clear	2.8	3.2	42	80	120°

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If =20 mA		IV[mcd] @If =20 mA		Viewing Angle 2θ1/2 [deg]
				Typ.	Max.	Typ.	Max.	
BL-HBH33	Blue	460-475	Transparent	3.2	3.6	63	120	120°
BL-HG033	Yellow Green	566-576		2.2	2.6	3.7	8.2	
BL-HUF33	Red	625-635		2.2	2.6	42	94	

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If =5 mA		IV[mcd] @If =5 mA		Viewing Angle 2θ1/2 [deg]
				Typ.	Max.	Typ.	Max.	
BL-HGK33	Green	520-535	Transparent	2.8	3.2	63	140	120°
BL-HB333	Blue	460-475		2.8	3.2	28	63	


Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If =50 mA		IV[mcd] @If =50 mA		Viewing Angle 2θ1/2 [deg]
				Typ.	Max.	Typ.	Max.	
BIR-HM133	IR	940	Transparent	1.25	1.7	0.92	1.8	120°

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If =50 mA		IV[mcd] @If =50 mA		Viewing Angle 2θ1/2 [deg]
				Typ.	Max.	Typ.	Max.	
BPT-HPG33	PT	940	Transparent			0.8	1.66	120°
BPT-HP233	PT					2.39	4.97	



SURFACE MOUNT CHIP LED LAMP

SMD LED 1210-1.1T(Bi-color)

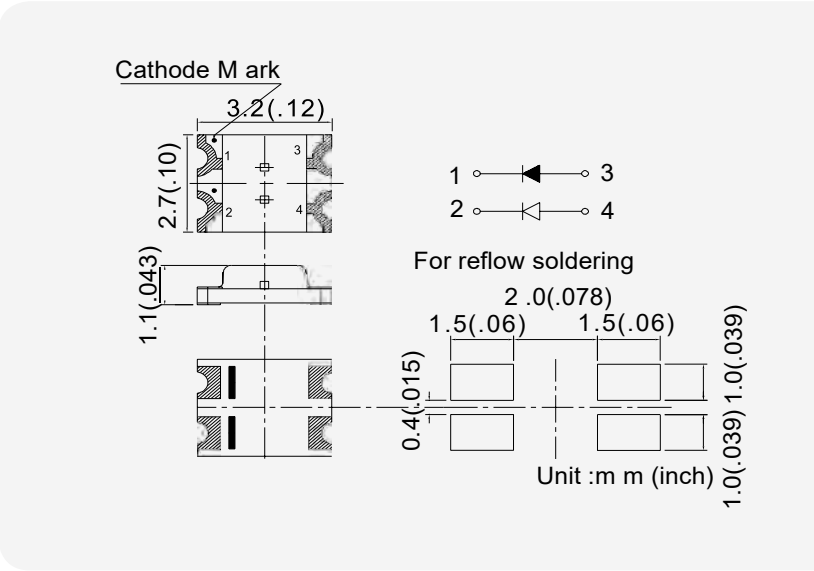

Part No.	Emitted Color	λd(nm)	Lens Appearance	Vf(V) @If =20 mA		IV[mcd] @If =20 mA		Viewing Angle 2θ1/2 [deg]
				Typ.	Max.	Typ.	Max.	
BL-HUBGE33B	Red	620-640	Transparent	2.2	2.6	42	94	120°
	Yellow Green	566-576		2.2	2.6	18.5	35	
BL-HY0G033B	Yellow	584-594		2.2	2.6	3.7	10	
	Yellow Green	566-576		2.2	2.6	3.7	10	
BL-HKBGE33B	Yellow	582-592		2.2	2.6	42	94	
	Yellow Green	566-576		2.2	2.6	18.5	35	
BL-HE1G033B	Red	626-636		2.2	2.6	3.7	10	
	Yellow Green	566-576		2.2	2.6	3.7	10	
BL-HD1X133B	Red	638-648		2.2	2.6	12.3	28	
	Green	566-576		2.2	2.6	8.2	20	
BL-HA1GE33B	Amber	600-615		2.2	2.6	3.7	10	
	Yellow Green	566-576		2.2	2.6	18.5	35	



LED LAMP


STANDARD LED LAMP (ROUND TYPES)

Package	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data (At 20mA)			Viewing Angle 2θ1/2 (deg)	Drawing No.	
	Emitted Color	Peak Wave Length λP(nm)		Δλ (nm)	Pd (mW)	If (mA)	Peak If(mA)	Vf(V)		Iv Typ. (mcd)			
								Typ.	Max.				
	T-1 Standard 0.5" Lead 3 ø	Red	655	Red Diffused	40	110	40	200	1.7	2.0	6.0	40	L-01
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	8.0	40	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	40.0	40	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	40.0	40	
		Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	30.0	40	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	40.0	40	
		Bright Red	700	Red Trans	90	50	15	50	2.2	2.6	50.0	30	
		Hi-Eff Red	635	Red Trans	45	100	30	150	2.0	2.6	100.0	30	
		Green	568	Green Trans	30	100	30	150	2.2	2.6	80.0	30	
		Yellow	585	Yellow Trans	35	100	30	150	2.1	2.6	70.0	30	
	T-1 Standard 1.0" Lead 3 ø	Orange	635	Orange Trans	45	100	30	150	2.0	2.6	100.0	30	L-02
		Red	655	Red Diffused	40	110	40	200	1.7	2.0	6.0	40	
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	8.0	40	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	40.0	40	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	40.0	40	
		Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	30.0	40	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	40.0	40	
		Bright Red	700	Water Clear	90	50	15	50	2.2	2.6	50.0	30	
		Green	568	Water Clear	30	100	30	150	2.2	2.6	80.0	30	
		Hi-Eff Green	568	Water Clear	30	100	30	150	2.2	2.6	110.0	30	
	T-1 Low Profile 1.0" Lead 3 ø	Yellow	585	Water Clear	35	100	30	150	2.1	2.6	70.0	30	L-03
		Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	100.0	30	
		Red	655	Red Diffused	40	110	40	200	1.7	2.0	8.0	50	
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	60.0	50	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	70.0	50	
		Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	60.0	50	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	60.0	50	
		Amber	610	Orange Diffused	35	100	30	150	2.0	2.6	70.0	50	
		Bright Red	700	Water Clear	90	50	15	50	2.2	2.6	60.0	40	
	3 ø Standard 1.0" Lead	Green	568	Water Clear	30	100	30	150	2.2	2.6	110.0	40	L-04
		Yellow	585	Water Clear	35	100	30	150	2.1	2.6	90.0	40	
		Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	100.0	40	
		Red	655	Red Diffused	40	110	40	200	1.7	2.0	8.0	60	
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	60	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	60.0	60	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	70.0	60	
		Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	60.0	60	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	60.0	60	
		Amber	610	Orange Diffused	35	100	30	150	2.0	2.6	70.0	60	




LED LAMP


L-01 BL-Bxx31 Series

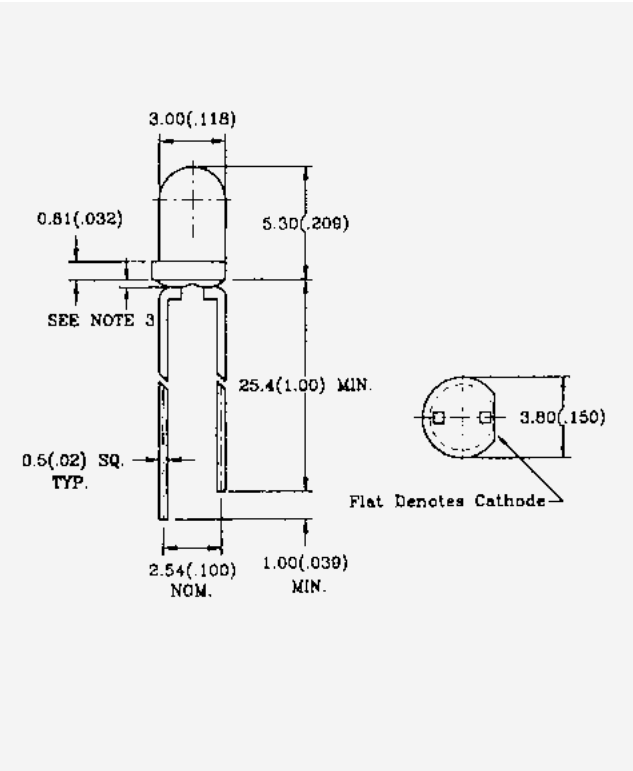


L-02 BL-Bxx41 Series

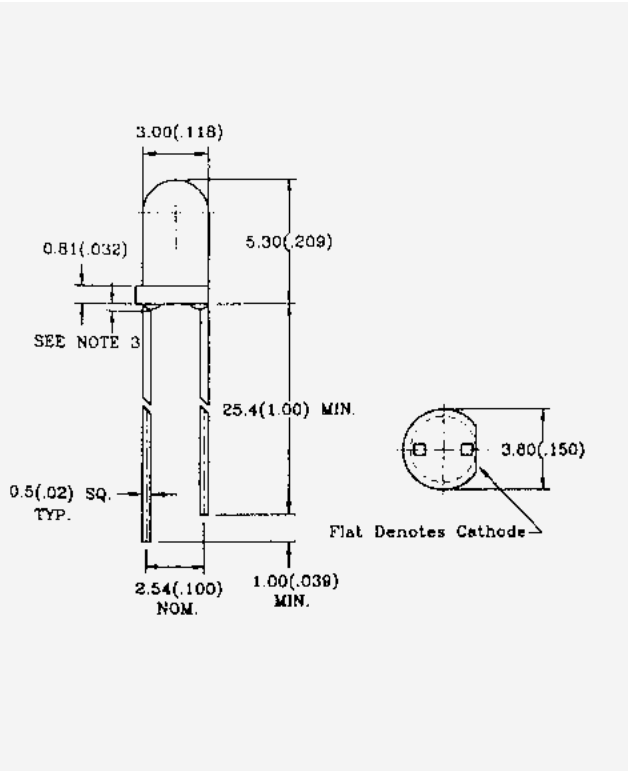

L-03 BL-Bxx31E Series

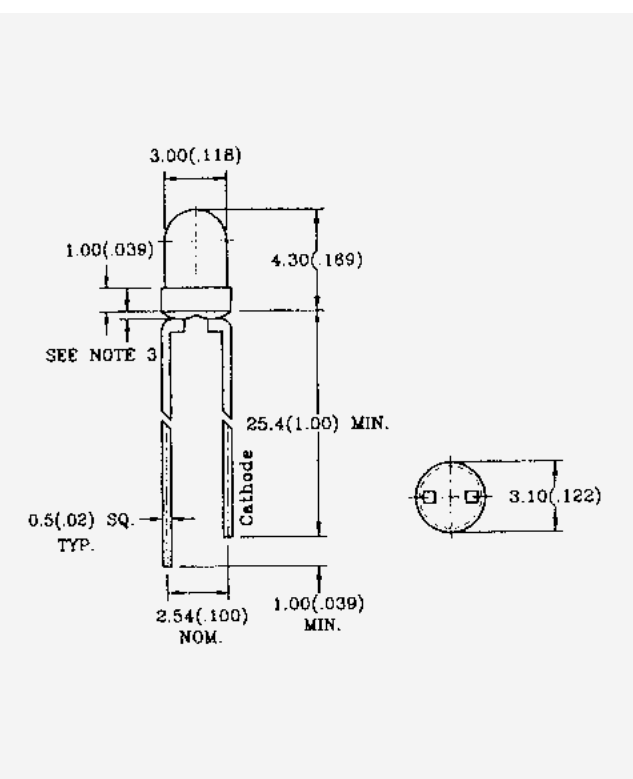



L-04 BL-Bxx41Q Series

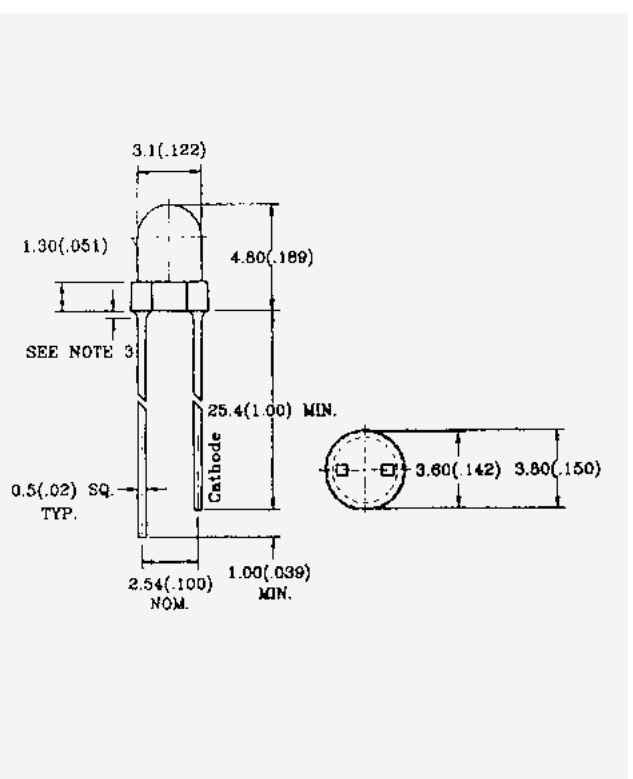



LED LAMP


STANDARD LED LAMP (ROUND TYPES)

Package	Chip			Lens Appearance	Absolute Maximum Ratings				Electro-optical Data (At 20mA)			Viewing Angle 2θ1/2 (deg)	Drawing No.
	Emitted Color	Peak Wave Length λP(nm)	Δλ (nm)		Pd (mW)	If (mA)	Peak If(mA)	Vf(V)		Iv Typ. (mcd)			
								Typ.	Max.				
	T-13/4 Standard 1.0" Lead 5 φ	Red	655	Red Diffused	40	110	40	200	1.7	2.0	6.0	30	L-05
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	9.0	30	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	80.0	30	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	80.0	30	
		Hi-Eff Green	568	Green Diffused	30	100	30	150	2.2	2.6	110.0	30	
		Yellow	585	Yellow Diffused	35	100	30	150	2.01	2.6	80.0	30	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	80.0	30	
		Bright Red	700	Red Trans	90	50	15	50	2.2	2.6	60.0	20	
		Hi-Eff Red	635	Red Trans	45	100	30	150	2.0	2.6	200.0	20	
		Green	568	Green Trans	30	100	30	150	2.2	2.6	200.0	20	
		Yellow	585	Yellow Trans	35	100	30	150	2.1	2.6	180.0	20	
		Orange	635	Orange Trans	45	100	30	150	2.0	2.6	200.0	20	
		Bright Red	700	Water Clear	90	50	15	50	2.2	2.6	60.0	20	
	0.5"Lead 4.8 φ	Red	655	Red Diffused	40	110	40	200	1.7	2.0	1.5	45	L-06
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	2.0	45	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	12.0	45	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	16.0	45	
		Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	12.0	45	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	12.0	45	
	T-13/4 0.5" Lead 5 φ	Red	655	Red Diffused	40	110	40	200	1.7	2.0	2.0	60	L-07
		Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	3.0	60	
		Hi-Eff Red	635	Red Diffused	45	100	30	150	2.0	2.6	16.0	60	
		Green	568	Green Diffused	30	100	30	150	2.2	2.6	22.0	60	
		Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	16.0	60	
		Orange	635	Orange Diffused	45	100	30	150	2.0	2.6	16.0	60	
	0.5" Lead 4.8 φ	Red	655	Water Clear	40	40	40	200	1.7	2.0	8.0	50	L-08
		Bright Red	700	Water Clear	90	90	90	50	2.2	2.6	12.0	50	
		Hi-Eff Red	635	Water Clear	45	45	45	150	2.0	2.6	55.0	50	
		Green	568	Water Clear	30	30	30	150	2.2	2.6	60.0	50	
		Yellow	585	Water Clear	35	35	35	150	2.1	2.6	50.0	50	
		Hi-Eff Red	635	Red Trans	45	45	45	150	2.0	2.6	55.0	50	
		Bright Red	700	Red Trans	90	90	90	50	2.2	2.6	12.0	50	
		Green	568	Green Trans	30	30	30	150	2.2	2.6	60.0	50	




LED LAMP


L-05 BL-Bxx34 Series

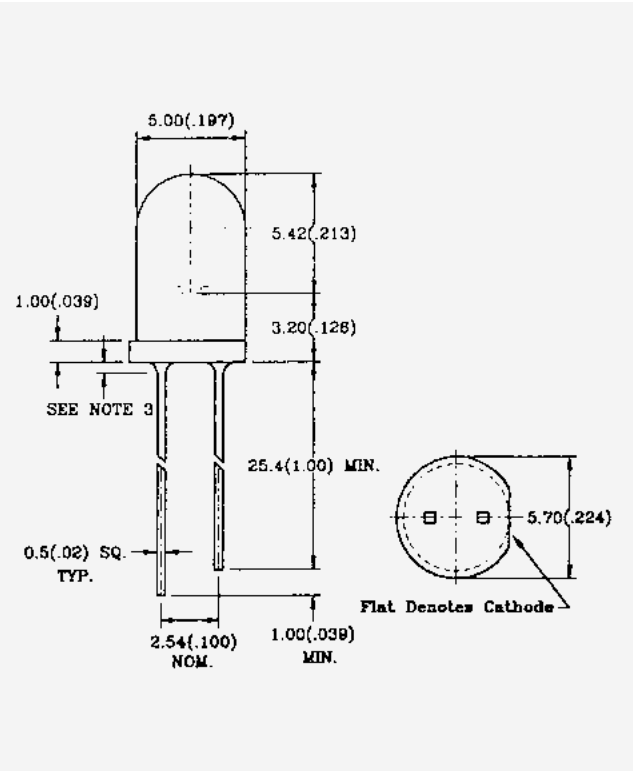


L-07 BL-Bxx24C Series

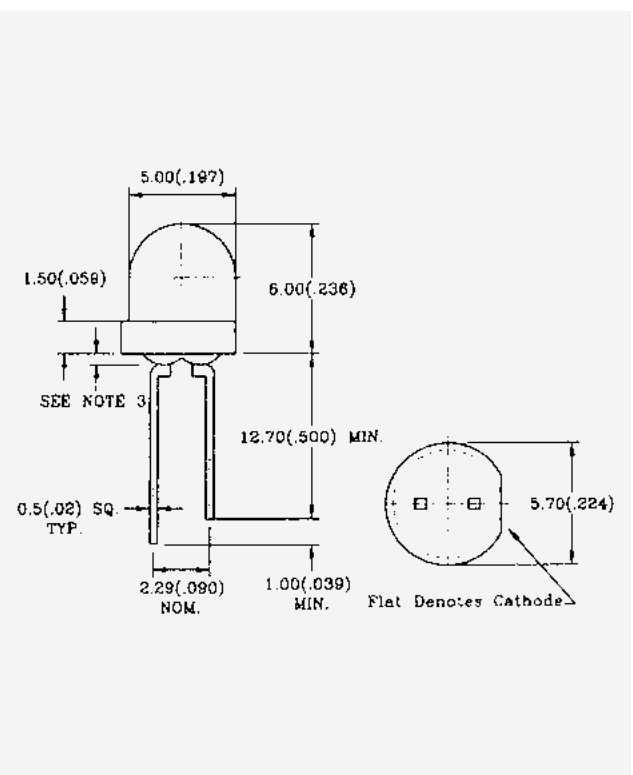

L-06 BL-Bxx24B Series

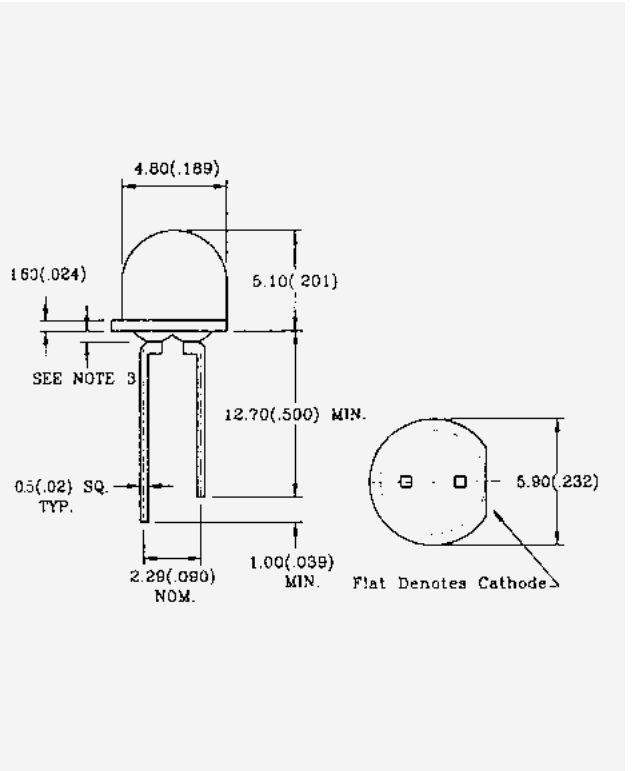


L-08 BL-Bxx3B Series

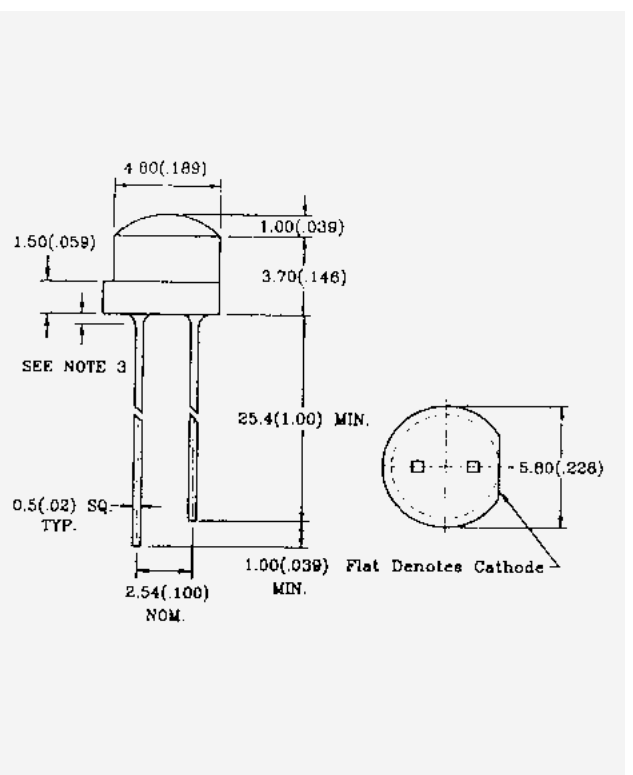


LED LAMP

DUAL-CHIP & TRI-STATE LED LAMP


Package		Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data [At 20mA]			Viewing Angle 2θ1/2 (deg)	Drawing No.
		Emitted Color	Peak Wave Length λP(nm)		Δλ (nm)	Pd (mW)	If (mA)	Peak If(mA)	Vf(V)		Iv Typ. (mcd)		
									Typ.	Max.			
	T-1 1.0" Lead Standard 3 φ	Bright Red	700	White diffused	90	50	15	50	2.2	2.6	7.0	40	L-09
		Green	568		30	100	30	150	2.2	2.6	35.0	40	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	25.0	40	
		Green	568		30	100	30	150	2.2	2.6	35.0	40	
		Yellow	585	White diffused	35	100	30	150	2.1	2.6	20.0	40	
		Green	568		30	100	30	150	2.2	2.6	35.0	40	
	T-13/4 1.0" Lead Standard 5 φ	Bright Red	700	White diffused	90	50	15	50	2.2	2.6	8.0	40	L-10
		Green	568		30	100	30	150	2.2	2.6	45.0	40	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	35.0	40	
		Green	568		30	100	30	150	2.2	2.6	45.0	40	
		Yellow	585	White diffused	35	100	30	150	2.1	2.6	30.0	40	
		Green	568		30	100	30	150	2.2	2.6	45.0	40	
		Bright Red	700	White diffused	90	50	15	50	2.2	2.6	3.5	55	L-11
		Green	568		30	100	30	150	2.2	2.6	20.0	55	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	15.0	55	
		Green	568		30	100	30	150	2.2	2.6	20.0	55	
		Yellow	585	White diffused	35	100	30	150	2.1	2.6	10.0	55	
		Green	568		30	100	30	150	2.2	2.6	20.0	55	
		Bright Red	700	White diffused	90	50	15	50	2.2	2.6	3.5	55	L-12
		Green	568		30	100	30	150	2.2	2.6	20.0	55	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	15.0	55	
		Green	568		30	100	30	150	2.2	2.6	20.0	55	
		Yellow	585	White diffused	35	100	30	150	2.1	2.6	10.0	55	
		Green	568		30	100	30	150	2.2	2.6	20.0	55	
	2.0x5.0x7.0 1.0" Lead Rectangular	Bright Red	700	White diffused	90	50	15	50	2.2	2.6	0.8	125	L-13
		Green	568		30	100	30	150	2.2	2.6	7.0	125	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	6.5	125	
		Green	568		30	100	30	150	2.2	2.6	7.0	125	
		Yellow	585	White diffused	35	100	30	150	2.1	2.6	5.5	125	
		Green	568		30	100	30	150	2.2	2.6	7.0	125	
	2.0x5.0x7.0 1.0" Lead Rectangular	Bright Red	700	White diffused	90	50	15	50	2.2	2.6	0.8	125	L-14
		Green	568		30	100	30	150	2.2	2.6	7.0	125	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	6.5	125	
		Green	568		30	100	30	150	2.2	2.6	7.0	125	
		Hi-Eff Red	635	White diffused	45	100	30	150	2.0	2.6	6.5	125	

LED LAMP


L-09 BL-Bxxx01 Series

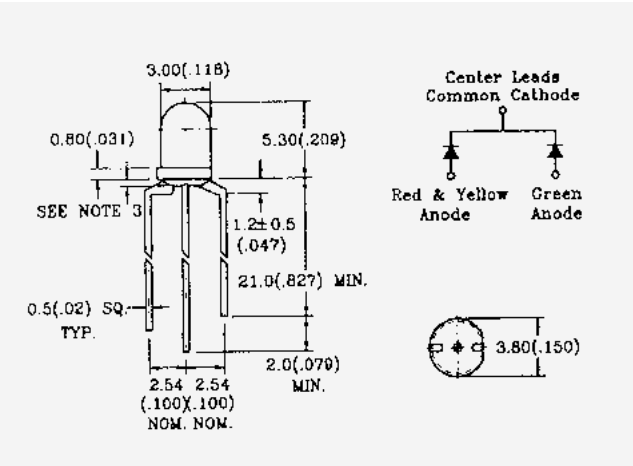


L-10 BL-Bxxx04 Series

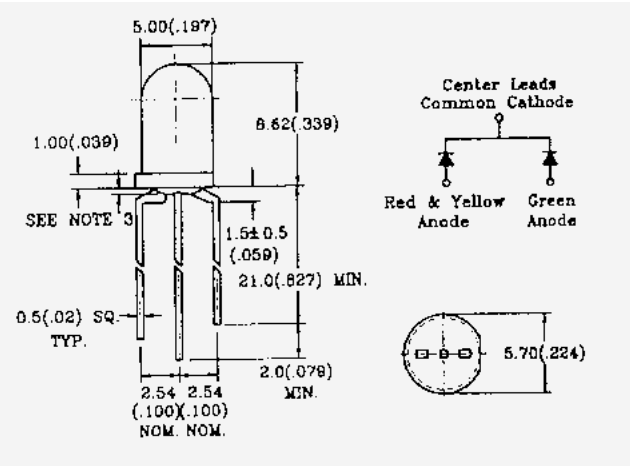


L-11 BL-Bxxx04-A Series

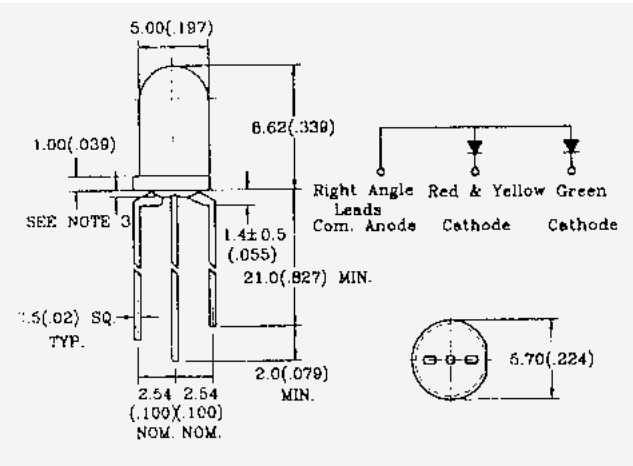


L-12 BL-Bxxx04-B Series

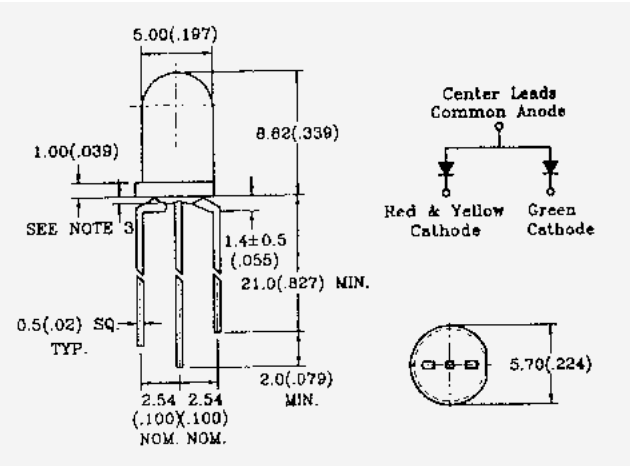

L-13 BL-Rxxx02N Series

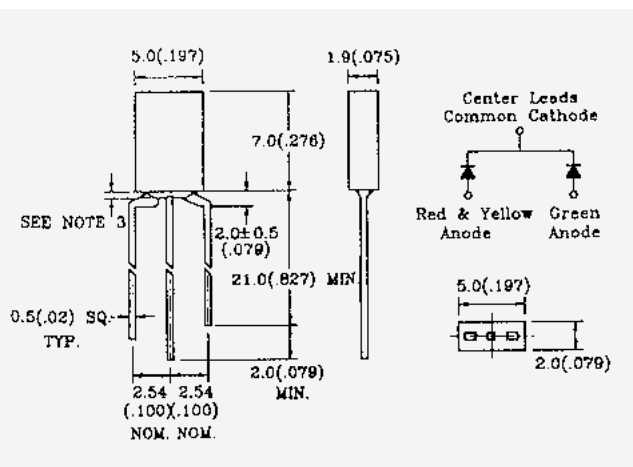

L-14 BL-Rxxx02B Series

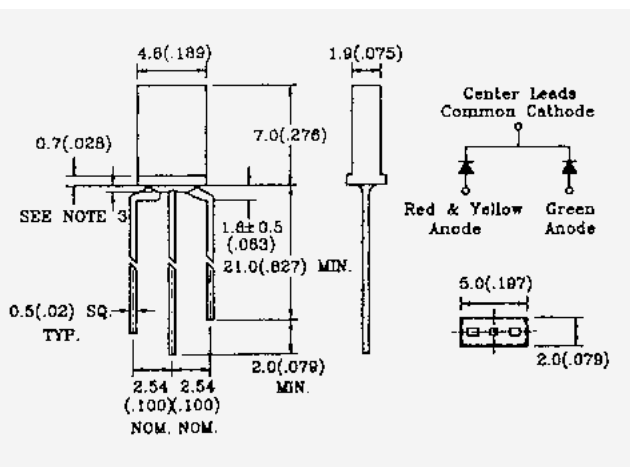



Partner

► Client companies (domestic) - approximately 2,500 companies




► Client companies (overseas) - approximately 500 companies from 60 countries



MINI SLIDE SWITCH

Switch using a slider that moves from the open (off) position to the closed (on) position.
Computer, amplifier, home appliance, lighting, communications equipment



ROTARY DIP SWITCH

Switch with which users rotate actuator, a rotating shaft, to positions needed so as to produce output by using BCD CODE, HEXADECIMAL CODE.
System air conditioner, automated equipment, lighting control, CCTV, Medical equipment, building control




PUSH BUTTON SWITCH

Switch that makes or breaks contact to change contact part by pushing a button.
Computer, network - system, modem, communications equipment



Printing

Printed circuit board (PCB) printing
The process of printing the circuit pattern on the PCB substrate. It involves the use of a photoresist and a UV light source to create a precise pattern on the PCB surface.

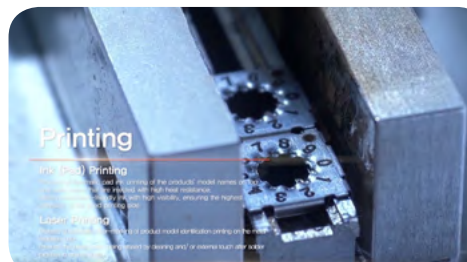

ROTARY SWITCH

Rotary switch component

SLIDE SWITCH

Slide switch component


PUSH SWITCH

Push switch component







QC System

Quality Control (QC) System
The QC system is designed to ensure the quality of the products. It involves the use of various inspection methods and equipment to detect and prevent defects in the production process.

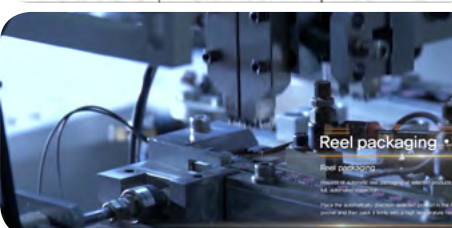

Certification

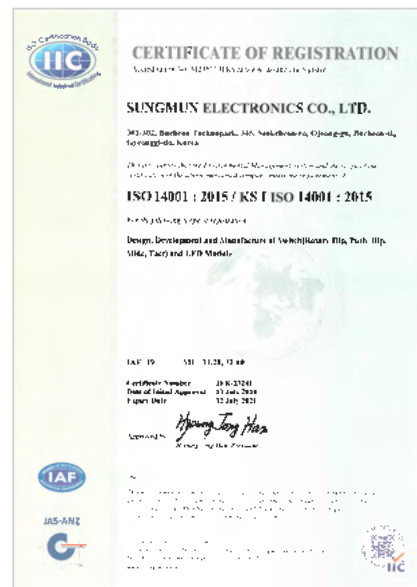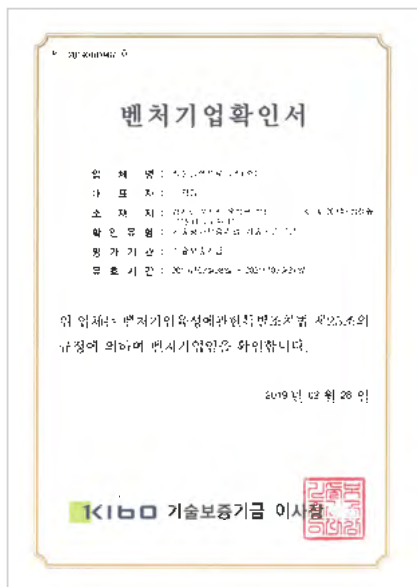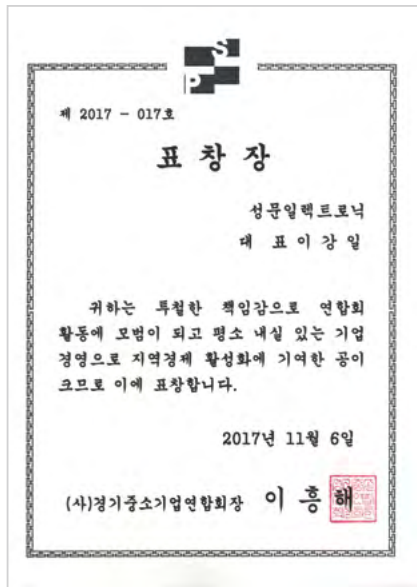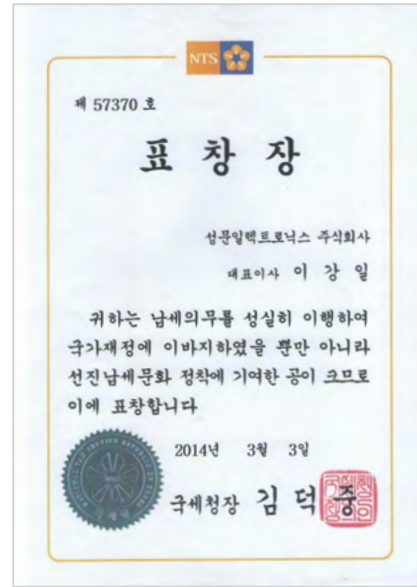

Certification

