
MIDGET, SPF (5AG) FUSE HOLDER


3576 (THM)


- Designed for SPF (Solar Protection Fuse)
- Optional cover will protect and insulate fuse
- Flame resistant

SPECIFICATIONS

Base & Cover: Nylon 46, UL Rated 94V-0
Clips: .030 (.76) Brass, Matte Tin Plate
UL Rated: 30 Amps @ 500V AC
UL Operating Temp. Range: -58°F to +292°F (-50°C to +145°C)





Optional Cover Cat. No. 3576C
fits Cat. No. 3576 & 3574





3574 (SMT)

Mounting Detail




Mounting Detail




CAT. NO. 3576 - Holder
CAT. NO. 3576C - Cover only

CAT. NO. 3574 - Holder
CAT. NO. 3576C - Cover only

3AG FUSE BLOCKS

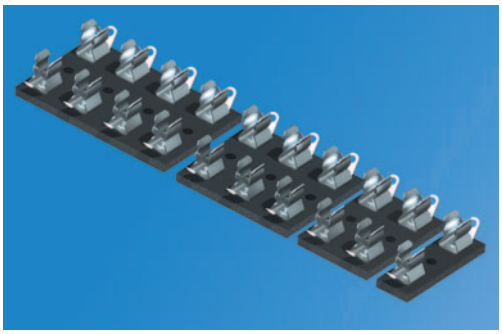

- Available with fiberglass or phenolic base
- Fuse clips riveted to base for rugged applications

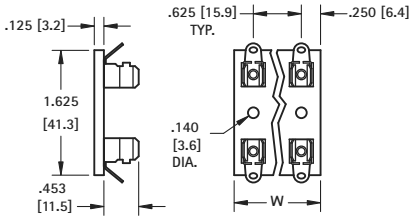

SPECIFICATIONS

Phenolic Base: XP, Black UL Rated 94-HB
Fiberglass Base: GPO-3 UL Rated 94 V-0
Clips: .020 (.51) Brass - Nickel Plated
Rated: 15 Amps @ 500V AC
Operating Temp. Range: -58°F to +292°F (-50°C to +145°C)


BLACK PHENOLIC CAT. NO.	FIBER-GLASS CAT. NO.	HOLDS NO. OF FUSES	W
3536*	3540*	1	.500 (12.7)
3537*	3541*	2	1.125 (28.6)
3538*	3542*	3	1.750 (44.5)
3539*	3543*	4	2.375 (60.3)

FUSE COVERS



Can be used with clips
3512, 3512P, 3517
and 3518

MATERIAL: ABS, UL Rated 94V-0


CAT. NO.	FUSE SIZE
3517C	5mm × 20mm



- Made from flame retardant material
- Protects fuse from shorting
and minor bumps



MATERIAL: PVC, UL Listed 94V-0


Can be used with
clips or fuse holders

CAT. NO.	FUSE SIZE	L	W	H
3527C	5mm × 20mm	.945 (24.0)	.314 (8.0)	.512 (13.0)
3521C	2AG	.787 (20.0)	.295 (7.5)	.452 (11.5)
4245C	3AG	1.319 (33.5)	.472 (12.0)	.591 (15.0)

SUBMINIATURE FUSE HOLDERS

- Reliable spring tension assures low contact resistance
- Fuse holders allow for quick changing of subminiature fuses
- Ideal for high density circuit board applications

SPECIFICATIONS

Base: Thermoplastic, UL Rated 94V-0
Springs: Beryllium Copper, Gold Plate
Pins: Brass, Tin Plate
Current Rating: 5 Amps @ 250V AC



.335 (8.5) × .158 (4.0) FUSE
For Littelfuse 392/395 Type TE5®
Bussmann: PC Series
or equivalent






.335 (8.5) DIA. FUSE
For Littelfuse 370 Type TR5®
Bussmann: BK-EFF series
or equivalent




STURDI-MOUNT




CAT. NO. 3552*

LOW PROFILE




CAT. NO. 3553*

STURDI-MOUNT




Mounting Detail



CAT. NO. 3556*

LOW PROFILE



CAT. NO. 3554*

*3AG Fuse Blocks & Subminiature Fuse Holders are not UL recognized