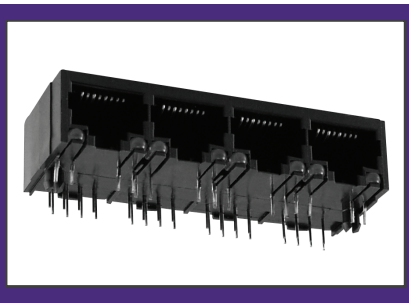


2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

GSLGX-N-4-88-G/Y

Part Number Builder

GSLGX	–	N	4	88		G/Y
Series		Shield Option	No. of Port	No. of Positions & Contacts	Ground Pin Spacing	LED Color Option

MODULAR JACKS AND PLUGS:

GSLGX Series Ganged

Modular Jack with LED, Tab Down

Product Features

Easy Viewing LEDs to act as Power/Transmit Indicators
Snap in Retention Tabs
Available Fully Shielded for EMI/RFI Protection
CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material

PBT Thermoplastic, with Glass-fiber Reinforcement, UL 94V-0 Rated

Contact Material

Phosphor Bronze

Plating

Gold Plated Over Nickel in Contact Area, Tin in Solder Area

Electrical Characteristics

Current Rating

1.5A

Voltage Rating

125V DC

Series

GSLGX - Ganged Modular Jack PCB Mount

Shield Options

N - Non-Shielded
NS7 - Fully Shielded with Top & Side Grounding Tabs

Number of Ports

4 - 4 Port

Number of Positions / Contacts

88 - 8 Positions / 8 Contacts

Ground Pin Spacing

Blank - Non-Shielded
3.05 - 3.05mm Ground Pin Spacing (Fully Shielded Only)

LED Color

G/Y - Green/Yellow
Y/G - Yellow/Green

Contact Kycon for Additional LED and Plating Options

GSLGX Series

Dimensions in mm

