| 未注公差/General tolerances(mm) | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0~3 | >3~6 | >6~10 | >10~18 | >18~30 | >30~50 | >50~80 | >80~120 | >120~180 | >180~250 | >250~315 | >315~400 | >400~500 | >500 | 0.1/10 |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 | ±2° |

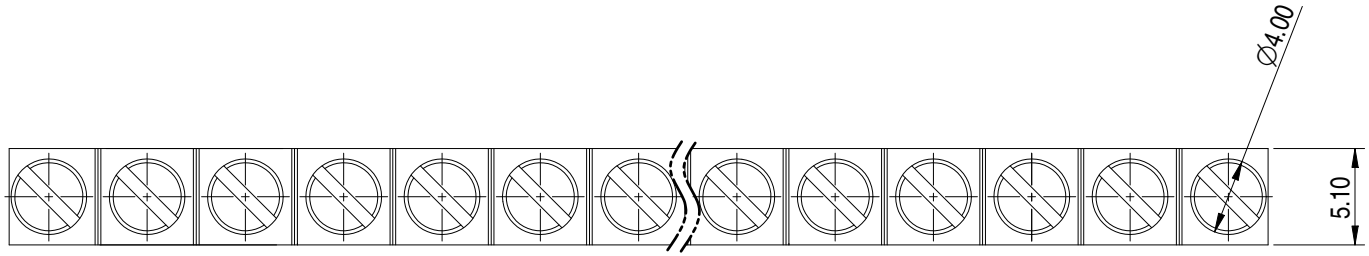


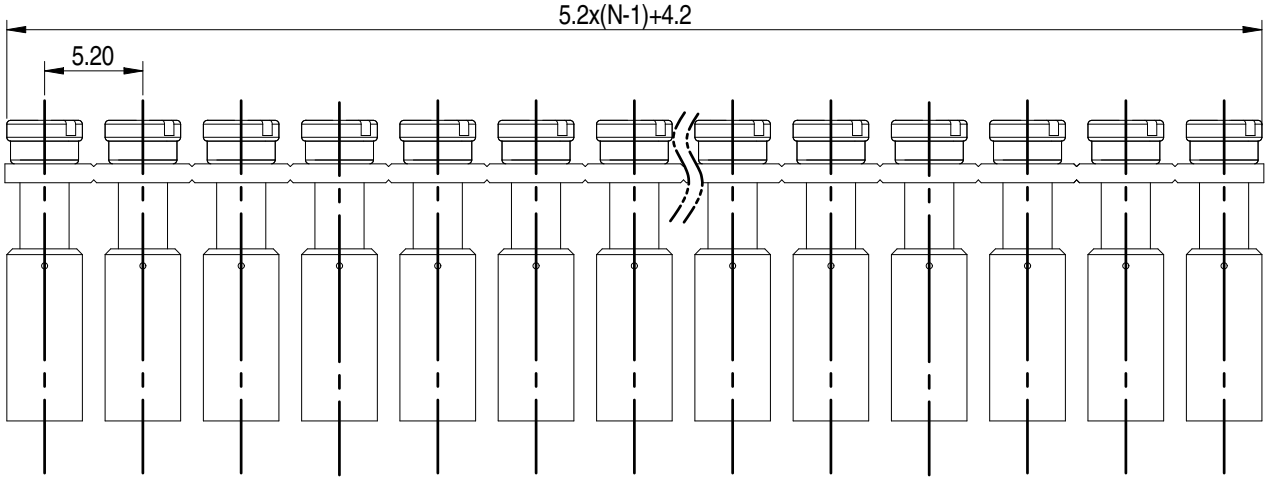


未标尺寸请参考3D文件

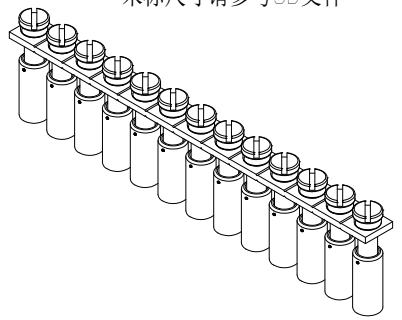

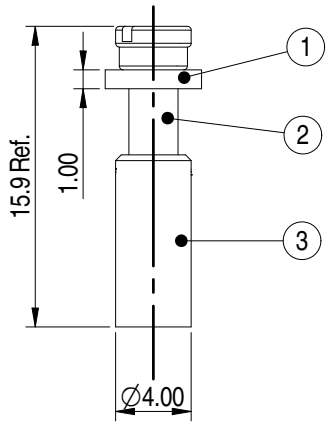


| 螺丝扭矩/Torque tightening(N.m/Lb.in) | M3,0.5/4.43 |
|---|---|
| 间距/Pitch(mm)/线数范围/Poles | 5.20/N=02~13P |
| 符合RoHS环保要求/Conform to RoHS | Yes |

| ITEM | NAME OF PART | MATERIAL | NOTES |
|---|---|---|---|
| 3 | Sleeve | Copper alloy | Ni Plated |
| 2 | Screw | Copper alloy | Ni Plated |
| 1 | Current carrier | Copper | Sn Plated |

| REV | ECN | DESCRIPTION | DRFT | DATE |
|---|---|---|---|---|
| 00 | | NEW DRAWING | 王乐洋 | 2025.06.15 |

DEGSON

| | | |
|---|---|---|
| APPD: | 李根劳 | 2025.06.15 |
| CHKD: | 马恩开 | 2025.06.15 |
| DRFT: | 王乐洋 | 2025.06.15 |

A4 mm (inch)

MATERIAL: | SURFACE/COLOR:

MAT NO./REV: / | MAT STATUS: work

NAME: FBRIXX-5L(H)

| DRAWING NO. | TYPE | DRAWING STATUS | SCALE | SHEET |
|---|---|---|---|---|
| 200361996 | CUSTOMER DRAWING | work | 2.5:1 | 1/1 |

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权，否则禁止将让、复制、利用、交流本文件的内容。侵犯者将为此负责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。