

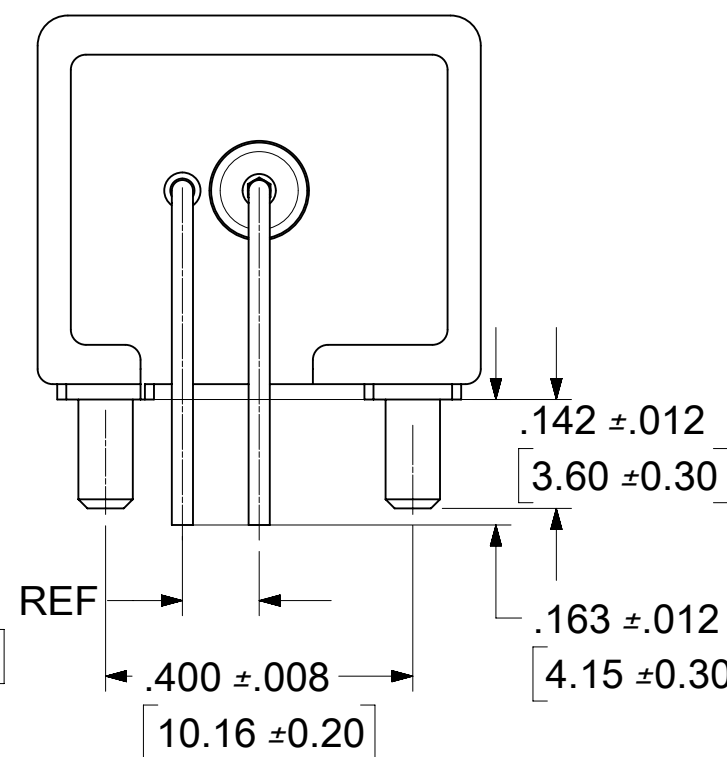
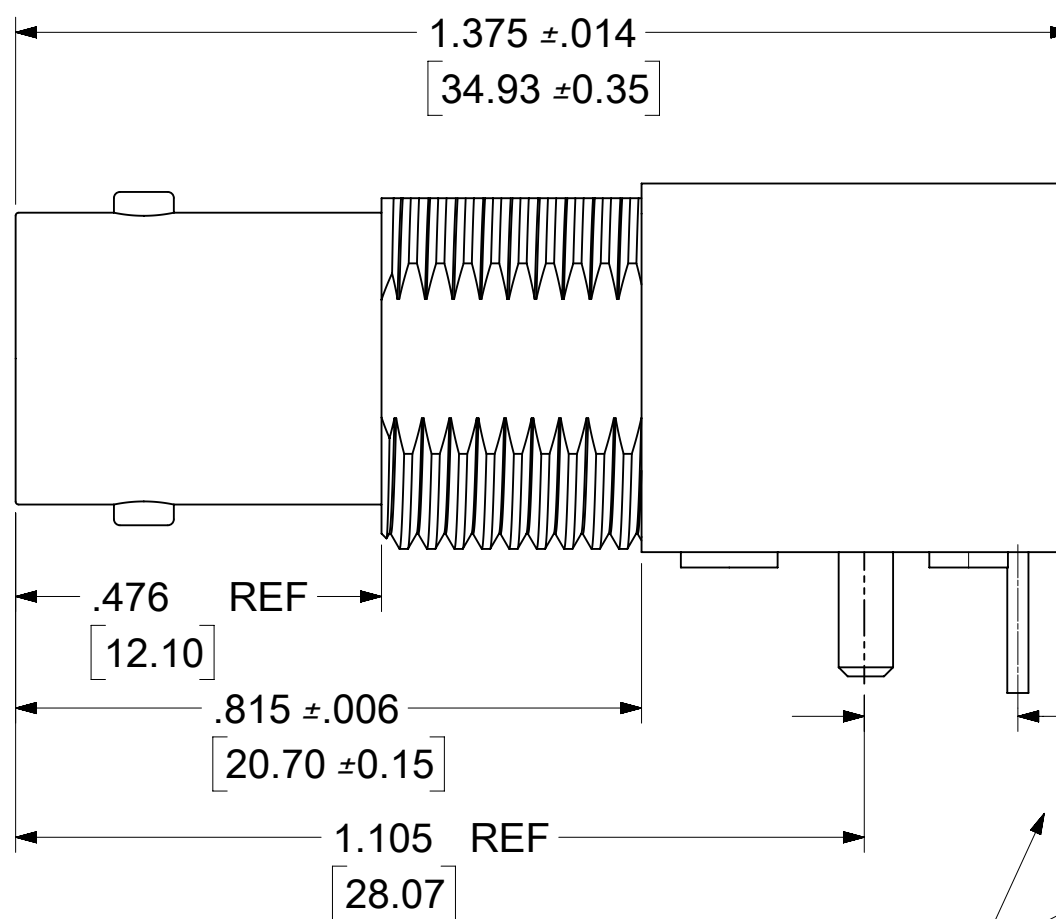
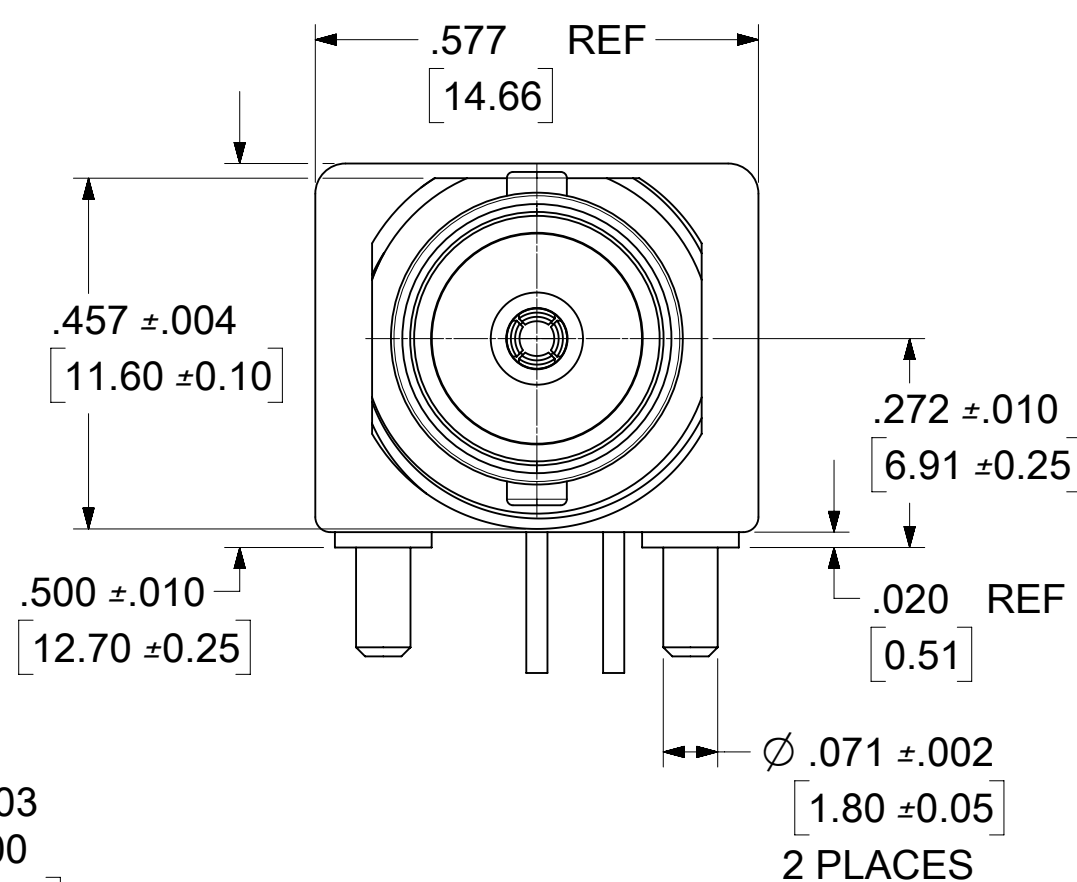



LOCK WASHER PHOSPHOR BRONZE
PLATED NICKEL

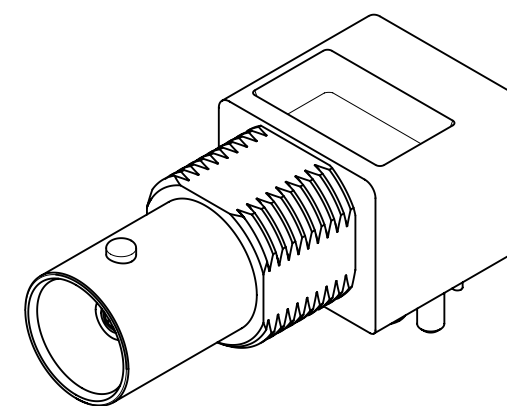





LEADS ARE TO BE
ADJUSTED TO FIT
PCB PATTERN

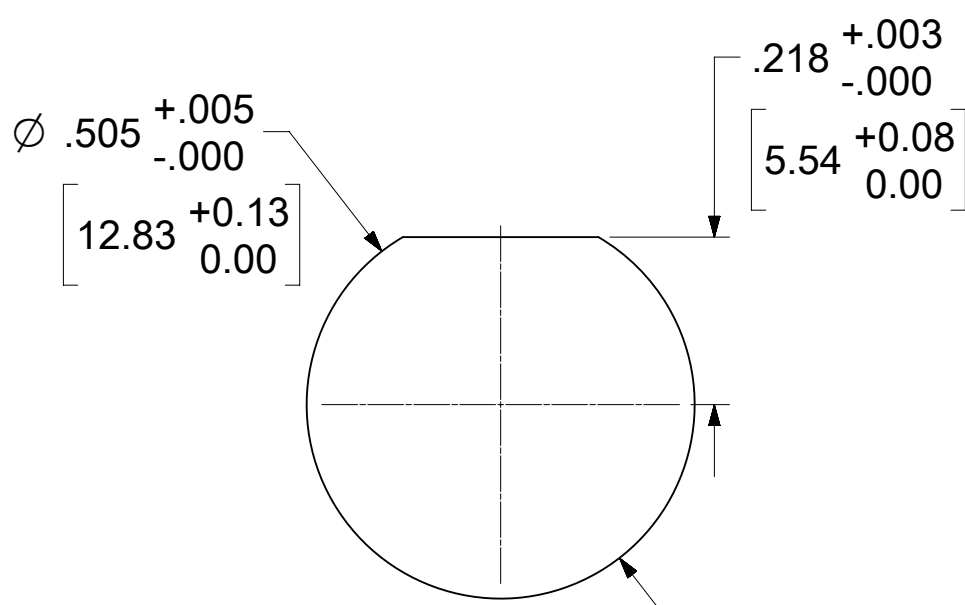

RECOMMENDED MOUNTING HOLE
 PANEL THICKNESS: .216 (5.50) MAX
 RECOMMENDED MOUNTING TORQUE:
 1.36 N-m (12 INCH LBS) MAX

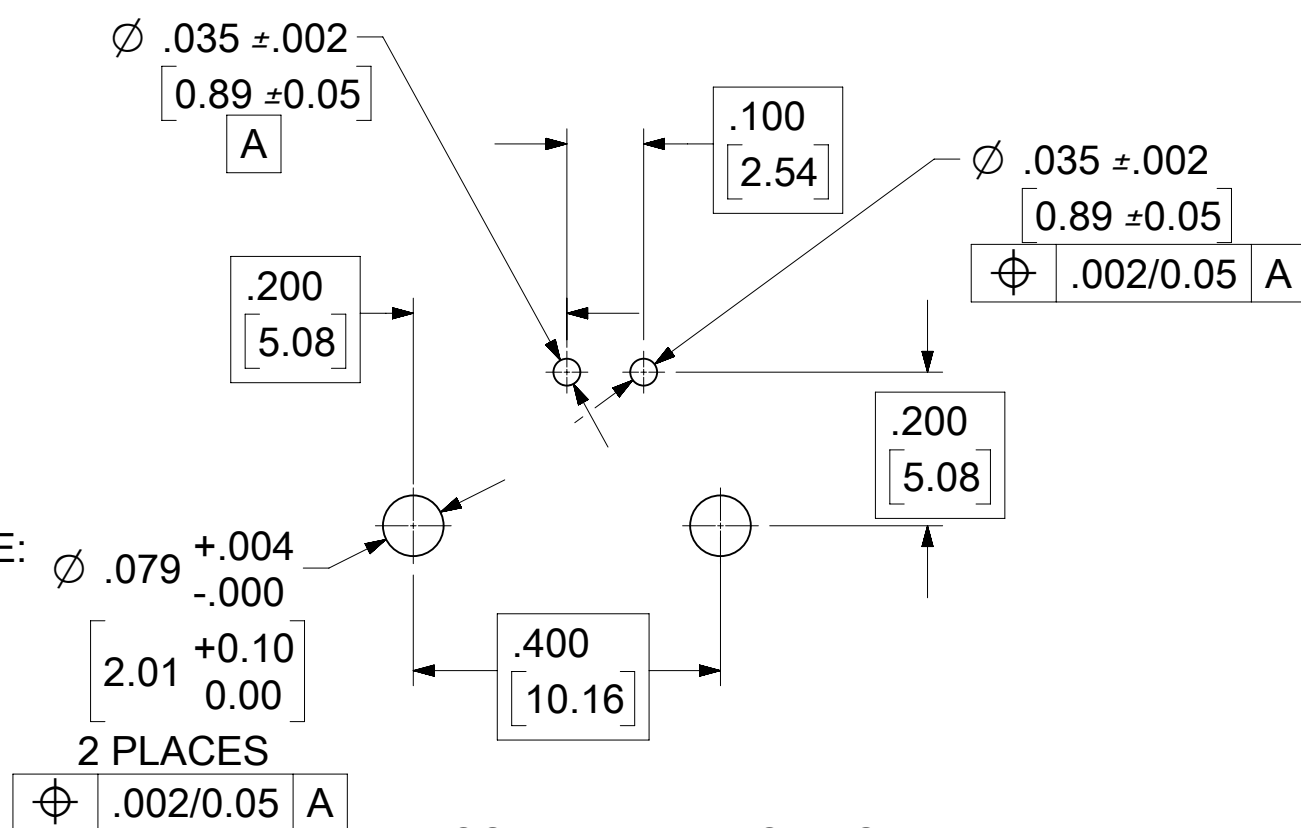

RECOMMENDED PCB HOLE CONFIGURATION

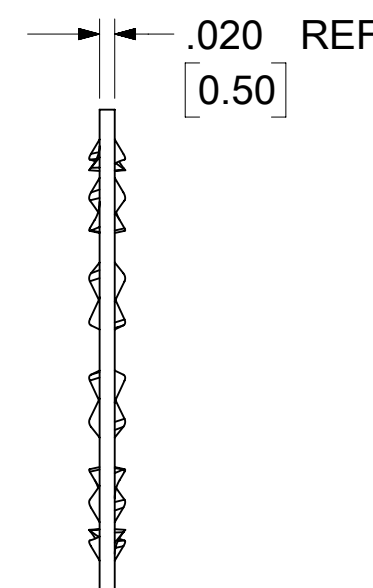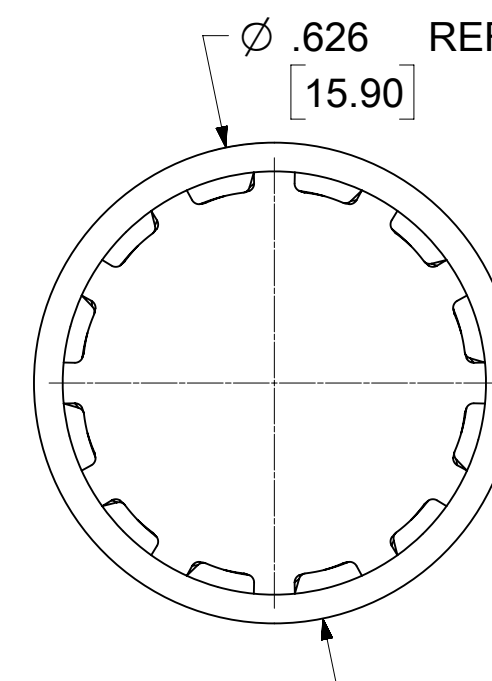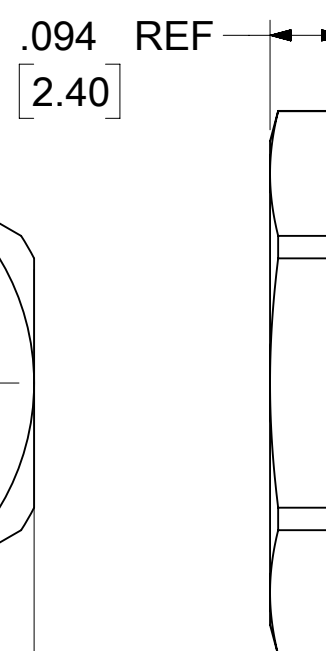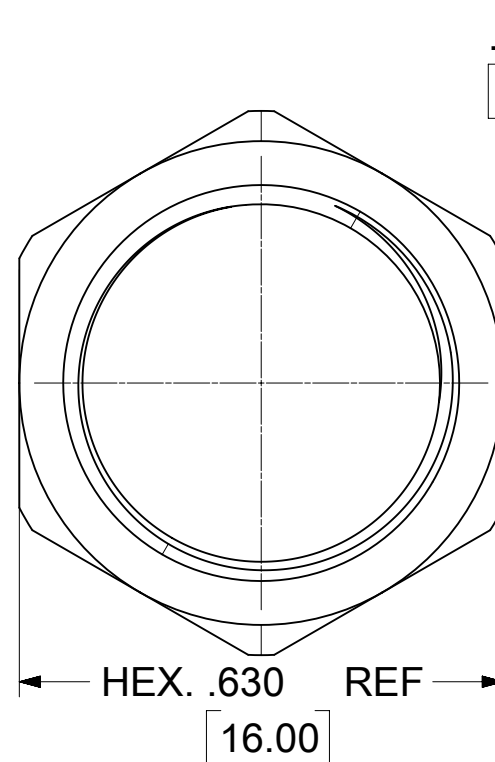

A6	2018/03/26	ADD POST DIM .071±.002 PER EWR 11902
REV.	DATE	DESCRIPTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 174408 DRWN: CWEI02 CHK'D: APPR: INITIAL REVISION: DRWN: MCHAN05 APPR: MHUANG				molex BNC JACK,R/A PCB,75 OHMS DIE CAST, RECEPTACLE BNC-J/RA/PCB									
HYBRID																	
GENERAL TOLERANCES (UNLESS SPECIFIED)								PRODUCT CUSTOMER DRAWING									
ANGULAR TOL ± °																	
4 PLACES		±		DOCUMENT NUMBER SD-73101-040									DOC TYPE	DOC PART	REVISION		
3 PLACES		±							PSD	001	A6						
2 PLACES		±							MATERIAL NUMBER					CUSTOMER GENERAL MARKET			SHEET NUMBER 1 OF 1
1 PLACE		±															
0 PLACES		±		2018/03/26				2007/06/12									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING C-SIZE		SERIES 73101									

BNC JACK,R/A PCB,75 OHMS
DIE CAST, RECEPTACLE BNC-J/RA/PCB

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
-----------------	----------	----------	----------

SD-73101-040	PSD	001	A6
--------------	-----	-----	----

MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	