
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 10174, GC	01/29/07	BS
B	ADD DIMENSIONS TO CORDSET, RFS.27376	06/20/19	MK
C	UPDATE DIMENSIONS, RFS.27883	03/11/26	MK

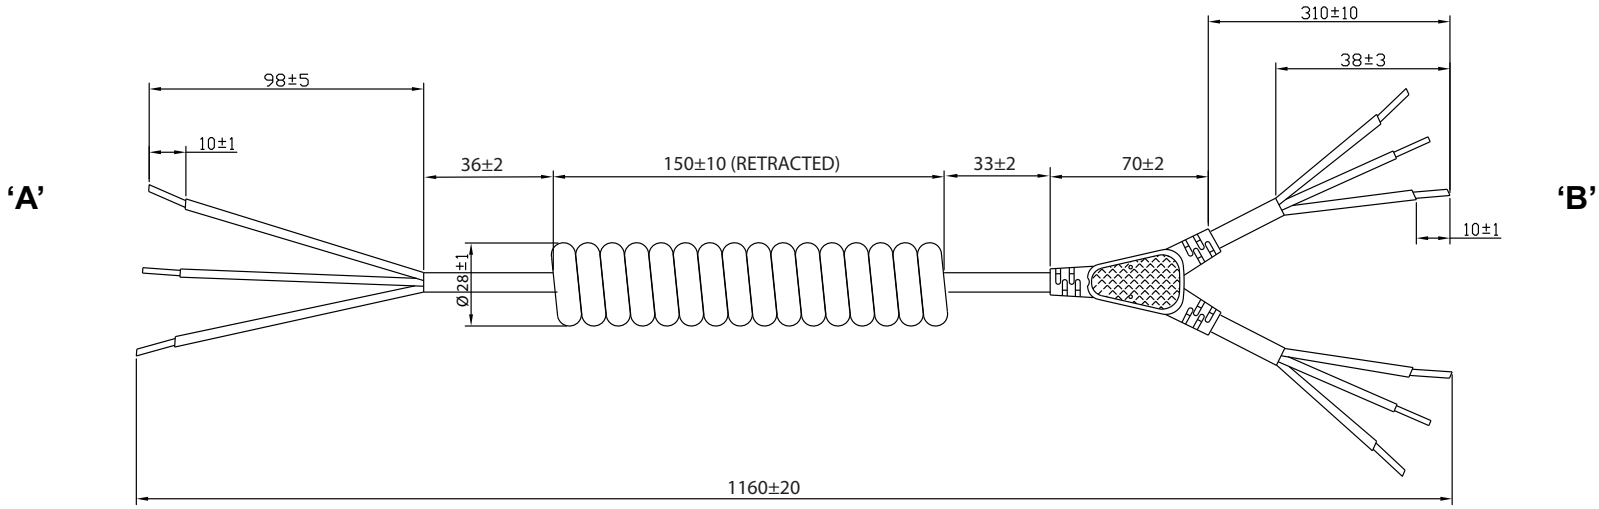

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE:	SJTW, 18 AWG, 3 CONDUCTOR
TEMPERATURE RATING:	105° C
CONDUCTOR COLORS:	BLACK / WHITE / GREEN
CABLE JACKET COLOR:	YELLOW
OVERALL LENGTH EXTENDED:	1160±20 mm
RETRACTED LENGTH:	150±10 mm
RETRACTED DIAMETER:	Ø 28±1mm
STRAIN RELIEF:	70±2mm
CABLE OUTER DIAMETER:	7.8±0.2 mm
END 'A'	REMOVED OUTER JACKET
END 'B'	REMOVED OUTER JACKET
APPROVALS CONNECTOR:	UL, CSA or cUL
APPROVALS CABLE:	UL, CSA or cUL

CONDUCTOR SPECIFICATION:

End'A'	Color	ROJ ± 5 mm	RIJ±1 mm	Terminal
Wire 1	Green	98	10	Stripped
Wire 2	White	98	10	Stripped
Wire 3	Black	98	10	Stripped

End'B'	Color	ROJ ± 3 mm	RIJ±1 mm	Terminal
Wire 1	Green	38	10	Stripped
Wire 2	White	38	10	Stripped
Wire 3	Black	38	10	Stripped

PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: RETRACTED POWER CABLE

INIT.BY: GC	DATE: 01/29/07			
DRAWN: NF	DATE: 01/29/07	FSCN No.: G, CC	SIZE A	REV. C
APRVD: HM	DATE: 01/29/07	SCALE: NONE	PART NO: 001943F0Y00X2	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.