

FOR-1351 Rev.1.0

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

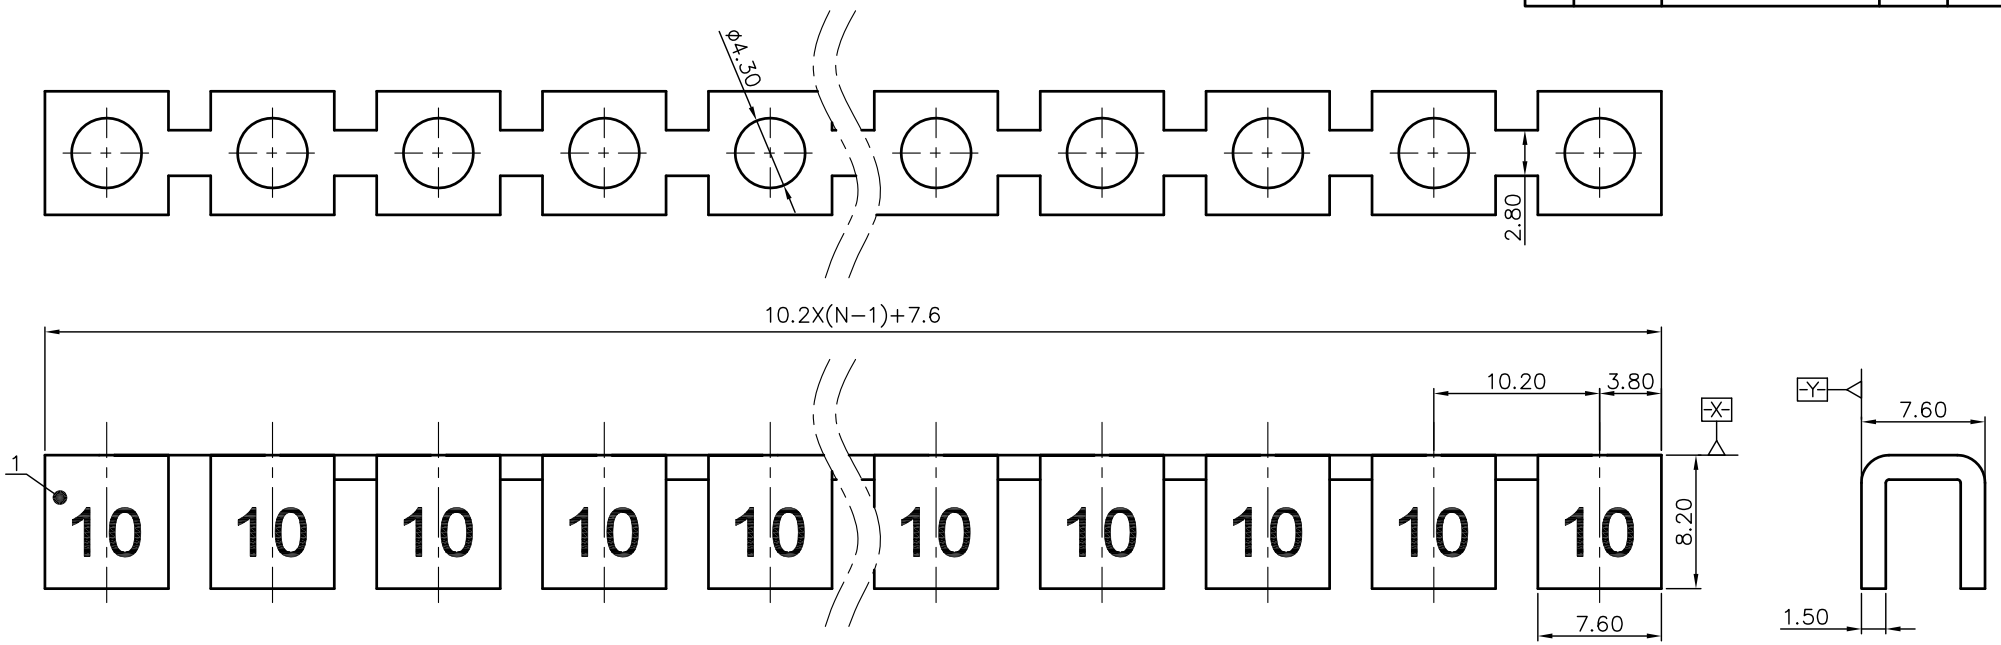

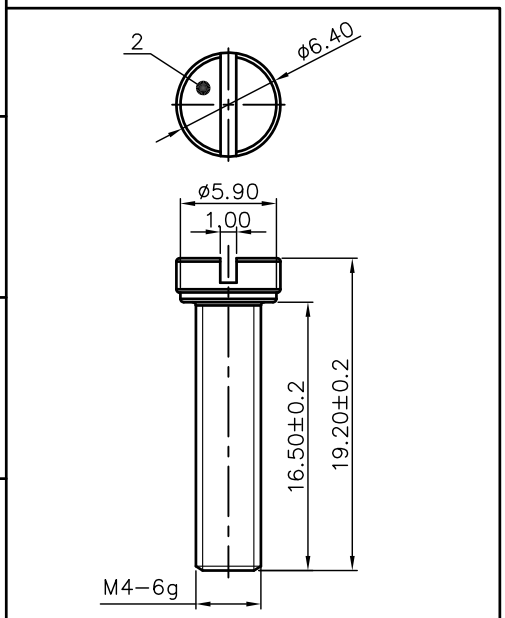

NOTES1:
UL Standard
1.Torque value : M4 , 10.53Lb.in

IEC Standard
1.Torque value : M4 , 1.2N·m

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 10.2mm, Poles : N=02~10P
3.Material: T2Y2
4.Plating: Cu plated at the bottom is more than 2um; Sn plated at the bottom is more than 4um
5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					– ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10 ∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

Current carrier and screws should be packed individually, which must be put in the same box

ITEM	NAME OF PART	MATERIAL	NOTES
2	Screw	COPPER ALLOY	Ni plated
1	Current carrier	COPPER ALLOY	Sn plated

DETACHED LISTS

PART NO.: /

APPD:

CHKD:

DRFT: Ding 08/19/16"

THIRD ANGLE PROJECTION

DEGSON®
宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: FBIXX-10L(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.: FBIXX-10-C01

MM (INCH)

DO NOT SCALE DRAWING

REV	T0
SHEET	1/1
SCALE	1:1