


Shielded Power Inductors – SLR6810

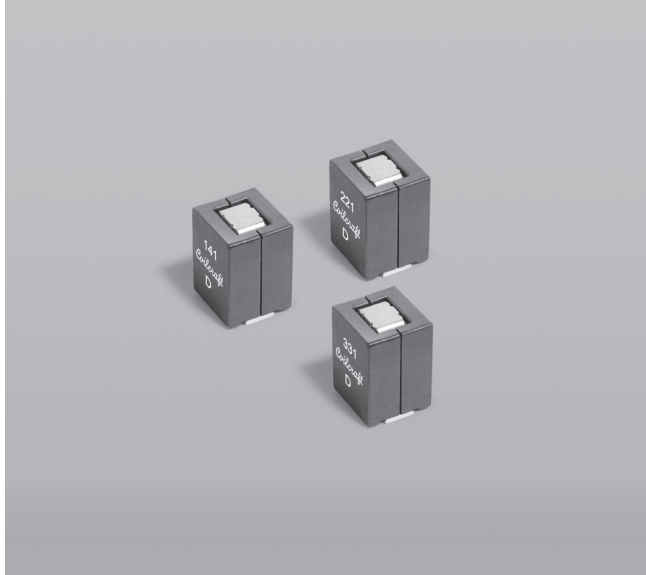

- Tight DCR tolerance for inductor-DCR-based current sensing circuits
- Excellent current handling
- 7.6 × 6.8 × 10 (L x W x H) mm surface mount package
- Designed for use in multi-phase VRM/VRD/EVRD regulators
- AEC-Q200 qualified

Core material Ferrite

Environmental RoHS compliant, halogen free

Terminations RoHS compliant matte tin over nickel over copper.

Weight 2.1 – 2.2 g

Ambient temperature –40°C to +125°C with (40°C rise) Irms current.

Maximum part temperature +165°C (ambient + temp rise). [Derating](#).

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 300/13" reel; Plastic tape: 24 mm wide, 0.4 mm thick, 20 mm pocket spacing, 10 mm pocket depth.

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number	Inductance ¹ (nH)	DCR ±10% ² (mOhms)	SRF typ (MHz)	Isat (A) ³			Irms (A) ⁴	
				at 25°C	at 100°C	at 125°C	20°C rise	40°C rise
SLR6810-141KED	140±10%	0.28	160	75	58	53	34	47
SLR6810-221KED	220±10%	0.28	134	47	37	33	34	47
SLR6810-331KED	330±10%	0.28	54	31	25	22	34	47

1. Inductance at 100 kHz, 0.1 Vrms, 0 Adc.

2. DCR is measured on a micro-ohmmeter at points indicated in the diagram below.



3. DC current that causes an inductance drop of 20% (typ) from its value without current. [Click for temperature derating information](#).

4. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. Temperature rise is highly dependent on many factors including pcb land pattern, trace size, air flow, and proximity to other components. Therefore temperature rise should be verified in application conditions. [Click for temperature derating information](#).

5. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1819-1 Revised 03/12/26




© Coilcraft Inc. 2026

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




SLR6810 Shielded Power Inductors


L vs Current

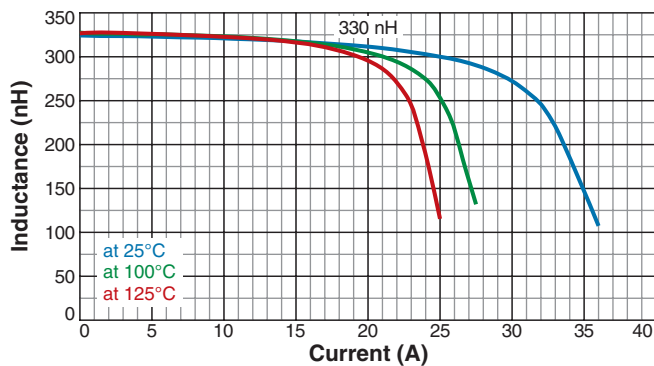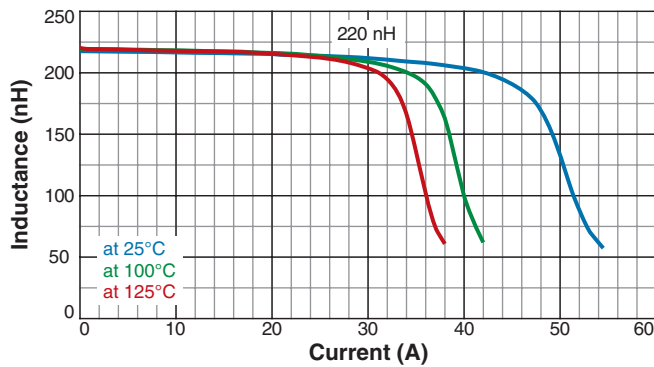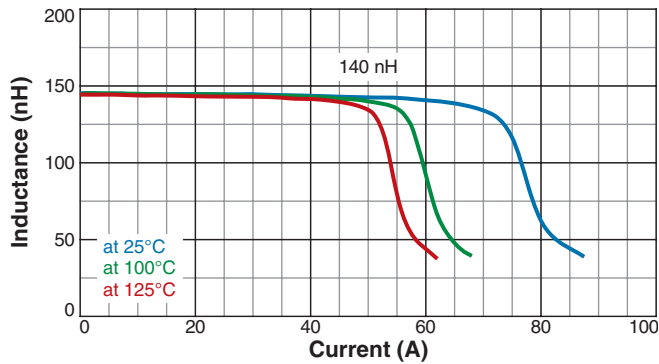

L vs Frequency

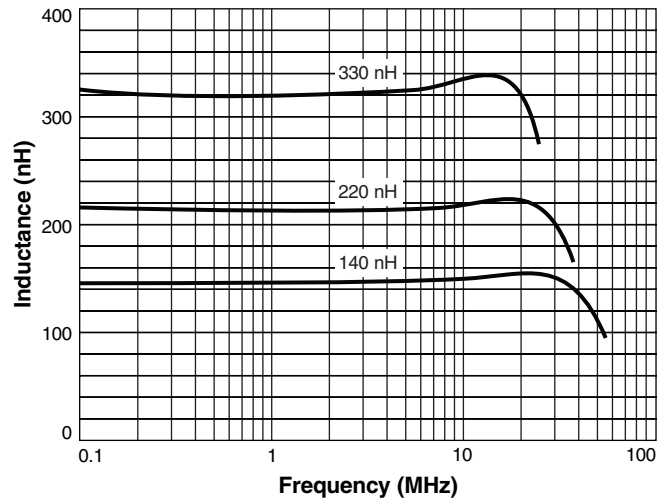

Dimensions

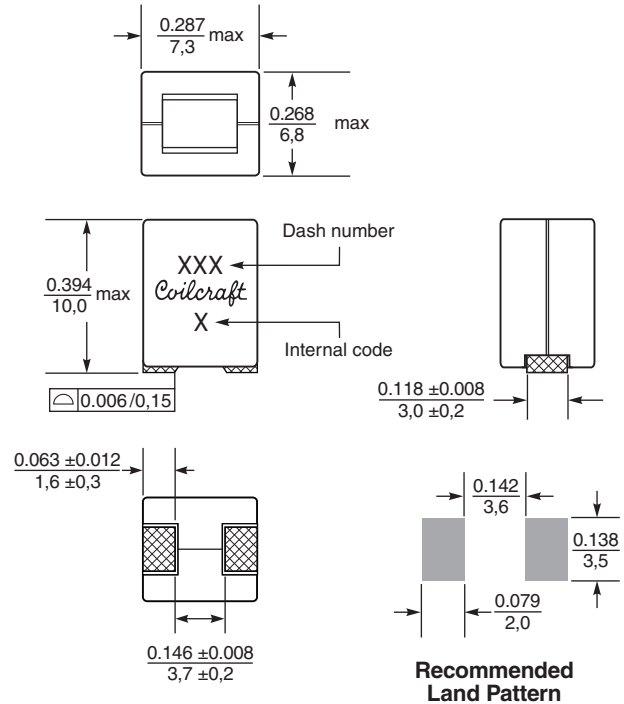

Dimensions are in $\frac{\text{inches}}{\text{mm}}$