


REV.	ECN NO.	DATE	SIGN	DESCRIPTION

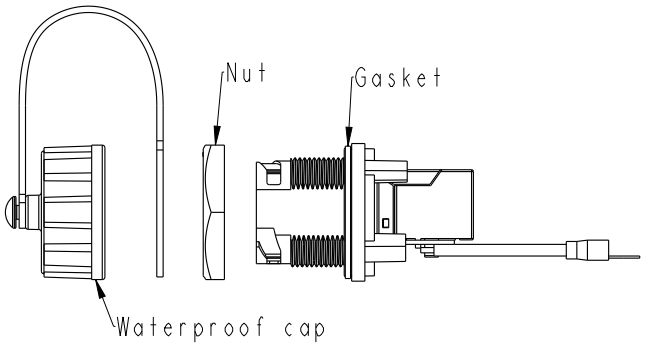





Recommended
Panel Cut-Out





Pin Assignments
Back View



Pin Assignments
Back View

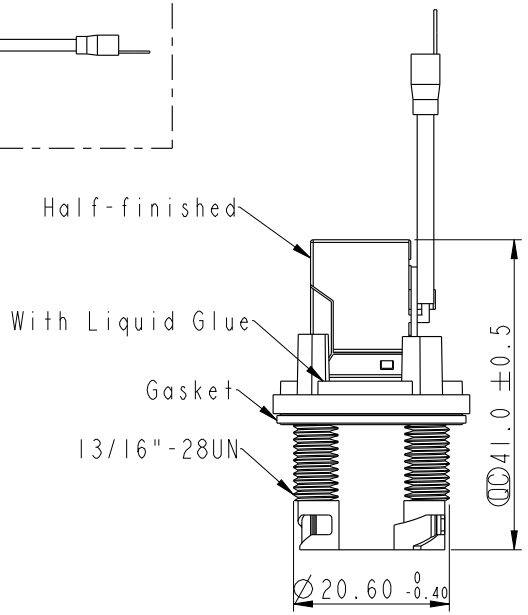

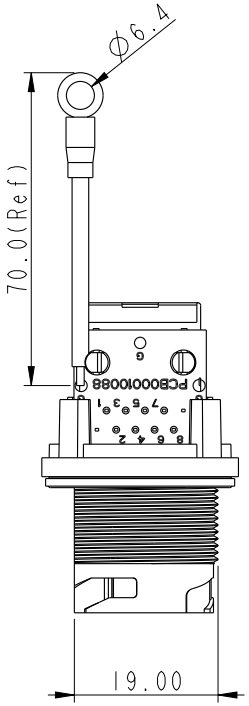



Sheet	Shield	Terminal
8	8	
7	7	
6	6	
5	5	
4	4	
3	3	
2	2	
1	1	
Conn.	Jack	Ground Wire

Pin Out

Note:
* Ⓠ Important Dimension
* Waterproof Rate: IP67, unmated
* Screw Nut: Thermoplastic, Black
* Gasket: Rubber Gray
* Housing: Thermoplastic, Black
* PCB: FR-4, Green
* Sheet: Metal, Nickel Plated
* Jack Material:
Housing: Thermoplastic, Black
Contacts: Metal, Gold Plated.
Shield: Metal, Nickel Plated.
* Ground Wire: UL1015 16AWG, Black.
* Ring Terminal: Metal
* For Panel Thickness Max: 2.8mm.
* Use with Waterproof cap or Dust cap
For Panel Thickness Max: 1.6mm.
* Waterproof cap & Nut & Conn. are packed separately in Paper bag.

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: RJ, C PLASTIC, C5E SHLD, 3LOCK FRONT FASTENED, PNL JACK S

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 | REV. A | WC-REV.

Ⓠ: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: RCP-5SPFFH-TCU7SP1	DRAWN BY: JC Chen	DATE: 2026-06-08
DWG NO: RCP-5SPFFH-TCU7SP1	CHECKED BY: Nan Su	DATE: 2026-06-08
CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2026-06-08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.