


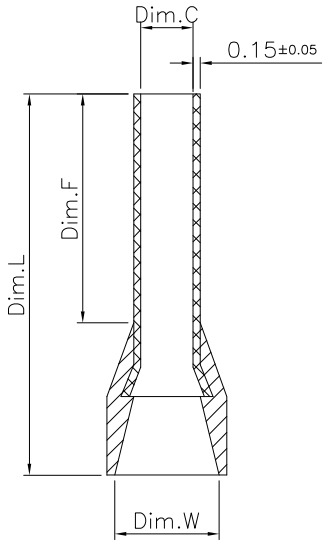

Specifications:
Material: Copper Tube, Tin Plated
Operating Temperature Range: −40°C~+105°C

Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.14 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-06014G	GRAY	6.0	10.0	0.70	1.60	26AWG 0.14mm²
3060-08014G	GRAY	8.0	12.0			
Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.25 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-06025G	LIGHT BLUE	6.0	10.0	0.75	1.90	24AWG 0.25mm²
3060-08025G	LIGHT BLUE	8.0	12.0			
Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.14 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-06034G	TUR-QUOISE	6.0	10.0	0.80	1.90	22AWG 0.34mm²
3060-08034G	TUR-QUOISE	8.0	12.0			
Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.14 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-06050G	ORANGE	6.0	12.0	1.00	2.60	20AWG 0.5mm²
3060-06050D	WHITE					
3060-08050G	ORANGE	8.0	14.0			
3060-08050D	WHITE					
3060-10050D	WHITE	10.0	16.0			
Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.14 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-06075G	WHITE	6.0	12.0	1.20	2.80	18AWG 0.75mm²
3060-06075D	GRAY					
3060-08075F	BLUE	8.0	14.0			
3060-08075G	WHITE					
3060-08075D	GRAY					
3060-10075D	GRAY	10.0	16.0			
3060-12075D	GRAY	12.0	18.0			

RoHS Compliant

REV	DATE	FILE	BY
A	09−JAN−2023		

DRAWN: JAMIE
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE:1:1
SHEET: 1 / 1
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION: Wire Ferrules 0.14~0.75 mm²
PART NO: 3060-XXXXXX
SIZE: A4